



## APPLICATIONS

A fan forced floor drop in heater for anti condensation or down draft heating below windows or in open plan areas. Typically in shop windows, reception areas, atriums and stairwells, wherever wall space is at a premium.

## FEATURES

- Heavy gauge floor grille easily removable for cleaning
- Heavy duty metal sheathed elements
- Totally enclosed permanently lubricated motor
- Automatic reset over temperature safety cut-out with audible alarm
- No additional ducting required as all airflow through grille
- Optional integral thermostat




## INSTALLATION

The heater is designed for mounting in a horizontal surface. It should not be mounted in a vertical surface. It is not recommended that it is mounted in a high traffic area although the grille can be easily removed for cleaning.

The grille must be firmly mounted to the finished floor to ensure any downward force is not directly transferred to the heater. Siting of the heater should limit the chance of covering although a safety cut out is fitted should this occur.

All electrical connections should be made by a suitably qualified person in accordance with the latest edition of the IEE Requirements for Electrical Installation (BS 7671:2008).

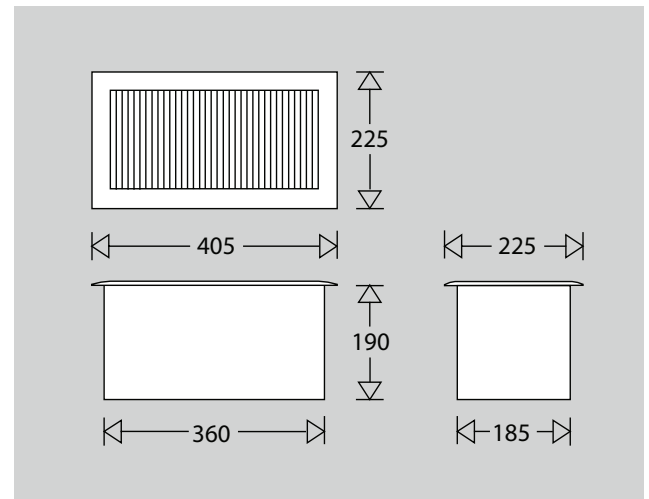

CAT No.		Watts	Volts	Length mm	Height mm	Depth mm	Weight kgs
CFD-1500	For in-floor recess mounting	1500	230	405	225	190	6.8
CFD-TB	Integral thermostat						

### Get In Touch

Call: [0845 6880112](tel:08456880112)  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
 Settle, North Yorkshire, BD24 9RH