

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.




**IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS, AND CAUTIONS. USE THIS PRODUCT CORRECTLY, AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY.**

### 1. SAFETY INSTRUCTIONS

#### 1.1 ELECTRICAL SAFETY

- ☐ **WARNING!** It is the responsibility of the owner and the operator to read, understand and comply with the following:  
You must check all electrical products, before use, to ensure that they are safe. You must inspect power cables, plugs, sockets and any other connectors for wear or damage. You must ensure that the risk of electric shock is minimised by the installation of appropriate safety devices. A Residual Current Circuit Breaker (RCCB) should be incorporated in the main distribution board. We also recommend that a Residual Current Device (RCD) is used. It is particularly important to use an RCD with portable products that are plugged into a supply which is not protected by an RCCB. If in any doubt consult a qualified electrician. You may obtain a Residual Current Device by contacting your Sealey dealer. **You must** also read and understand the following instructions concerning electrical safety.
- 1.1.1 The **Electricity at Work Act 1989** requires all portable electrical appliances, if used on business premises, to be tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year.
- ☐ **WARNING!** The switch on this fan has components fitted to protect it against a possible voltage surge. When carrying out regular appliance checks, a voltage no higher than 250V should be applied for the purposes of insulation testing.
- 1.1.2 The **Health & Safety at Work Act 1974** makes owners of electrical appliances responsible for the safe condition of those appliances and the safety of the appliance operators. **If in any doubt about electrical safety, contact a qualified electrician.**
- 1.1.3 Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply. See 1.1.1. and 1.1.2. and use a Portable Appliance Tester.
- 1.1.4 Ensure that cables are always protected against short circuit and overload.
- 1.1.5 Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that none are loose.
- 1.1.6 **Important:** Ensure that the voltage marked on the appliance matches the power supply to be used and that the plug is fitted with the correct fuse - see fuse rating at right.
- 1.1.7 **DO NOT** pull or carry the appliance by the power cable.
- 1.1.8 **DO NOT** pull the plug from the socket by the cable.
- 1.1.9 **DO NOT** use worn or damaged cables, plugs or connectors. Immediately have any faulty item repaired or replaced by a qualified electrician. When an ASTA/BS approved UK 3 pin plug is damaged, cut the cable just above the plug and **dispose of the plug safely**. Fit a new plug according to the following instructions (UK only).

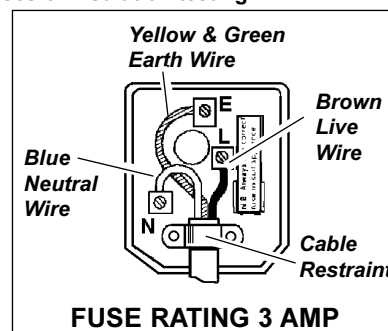

- a) Connect the GREEN/YELLOW earth wire to the earth terminal 'E'.
- b) Connect the BROWN live wire to the live terminal 'L'.
- c) Connect the BLUE neutral wire to the neutral terminal 'N'.
- d) After wiring, check that there are no bare wires, that all wires have been correctly connected, that the cable outer insulation extends beyond the cable restraint and that the restraint is tight.

Double insulated products, which are always marked with this symbol , are fitted with live (brown) and neutral (blue) wires only. To rewire, connect the wires as indicated above - **DO NOT** connect either wire to the earth terminal.

- 1.1.10 Products which require more than 13 amps are supplied without a plug. In this case you must contact a qualified electrician to ensure that a suitably rated supply is available. We recommend that you discuss the installation of an industrial round pin plug and socket with your electrician.
- 1.1.11 If an extension reel is used it should be fully unwound before connection. A reel with an RCD fitted is preferred since any appliance plugged into it will be protected. The cable core section is important and should be at least 1.5mm<sup>2</sup>, but to be absolutely sure that the capacity of the reel is suitable for this product and for others which may be used in the other output sockets, we recommend the use of 2.5mm<sup>2</sup> section cable. If extension reel is to be used outdoors, ensure it is marked for outdoor use.

#### 1.2 GENERAL SAFETY

- ☐ **WARNING!** If a fan falls into water or other liquid, immediately switch off and disconnect from the mains power supply. Do not touch the fan until the mains power supply has been disconnected.
- x DO NOT stand the fan on its electrical power cable.
- x DO NOT insert any objects through the fan guard.
- x DO NOT cover the fan when in use.
- x DO NOT immerse the fan in water or any other liquid.
- x DO NOT allow children to operate the fan.
- x DO NOT stand the fan where it may be knocked over or off a surface, or where the lead may cause a person to trip.
- x DO NOT use the fan outdoors.
- x DO NOT use an extension cord unless it has been approved by an electrical authority.
- x DO NOT modify speed control or attempt to fit any additional external speed control device to the fan.
- x DO NOT operate the fan where there are harmful, explosive or flammable gases, fumes or hazardous substances.
- ✓ When not in use place the fan in its original box or cover the fan to protect from dust, and store in a safe, dry, childproof location.
- ✓ Use recommended parts only, unauthorised parts may be dangerous, and will invalidate your warranty.
- ✓ Always disconnect the fan from the power supply when moving it from one location to another and ensure the fan is stood on a level surface.
- ✓ The fan air flow is powerful. Before using ensure there are no materials or items that may be erroneously moved by the stream of air.
- ✓ Keep the fan clean and maintained in good condition. For electrical components or motor service contact an authorised service agent.
- ✓ Disconnect the fan from the mains power when not in use, and before servicing or performing any maintenance.
- ✓ Use the fan in dry areas only. Do not use in wet or areas with high condensation such as showers, pools etc.

HVD30 - 2 - 190405

#### Get In Touch



Call: 0845 6880112



Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)


#### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH

## 2. INTRODUCTION AND SPECIFICATION

High velocity industrial three-speed drum fan suitable for movement of huge volumes of air. Robust unit with heavy-duty gauge steel casing, guard and frame. Mobile unit allows control of air flow to exactly where it is needed. Carefully balanced and fully guarded blades provide quiet and safe operation. Fitted with BS approved plug. Suitable for use in industrial, commercial, agricultural and automotive workshop and showroom applications.

Fan Diameter: ..... 760mm(30")  
Speeds: ..... 3  
Speed Range: ..... 650-950rpm  
Max. Power: ..... 190-350W  
Supply: ..... 230V – 50Hz  
Current: ..... 0.9-1.9A

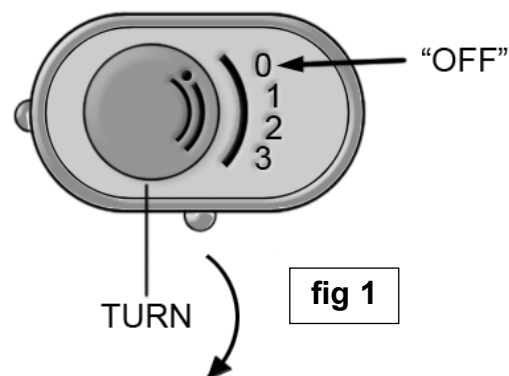

## 3. OPERATION


**WARNING! Ensure you read, understand and apply safety instructions before using the fan.**

### 3.1 FAN OPERATION

- 3.1.1 The fan is easily transportable by means of the wheels provided. Lift by the handle on the main body of the fan on the side opposite the wheels and manoeuvre the fan into position. Ensure that there is nothing in front of the fan that may be disturbed when the fan is switched on.
- 3.1.2 Check that the speed control box situated in the recess in the rear grill of the fan is set to "OFF". Uncoil the power lead from its stowage position and plug into the mains power supply. Ensure that the power lead is not stretched or positioned in such a way as to cause a hazard. Switch the power on.
- 3.1.3 Turn the fan on by rotating the control knob from "OFF" to "1". If a greater air flow is required turn the knob to the "2" or "3" setting (fig 1).
- 3.1.4 When you have finished using the fan ensure you turn the speed control switch to "0" (off) and disconnect the fan from mains power.
- 3.1.5 Recoil the lead onto the stowage hooks situated within the recess in the rear grill.

## 4. SPARE PARTS

- |    |          |                        |
|----|----------|------------------------|
| 1  | HVD30.01 | HANDLE                 |
| 2  | HVD30.02 | FRONT GRILL            |
| 3  | HVD30.03 | SCREW FOR GRILL        |
| 4  | HVD30.04 | SWITCH BOX             |
| 5  | HVD30.05 | MOTOR                  |
| 6  | HVD30.06 | ELECTRIC MAINS CABLE   |
| 7  | HVD30.07 | WASHER FOR WHEEL       |
| 8  | HVD30.08 | SCREW FOR WHEEL        |
| 9  | HVD30.09 | WHEEL                  |
| 10 | HVD30.10 | WASHER FOR FOOT        |
| 11 | HVD30.11 | SCREW FOR FOOT         |
| 12 | HVD30.12 | FOOT                   |
| 13 | HVD30.13 | RUBBER FOOT            |
| 14 | HVD30.14 | WASHER FOR RUBBER FOOT |
| 15 | HVD30.15 | SCREW FOR RUBBER FOOT  |

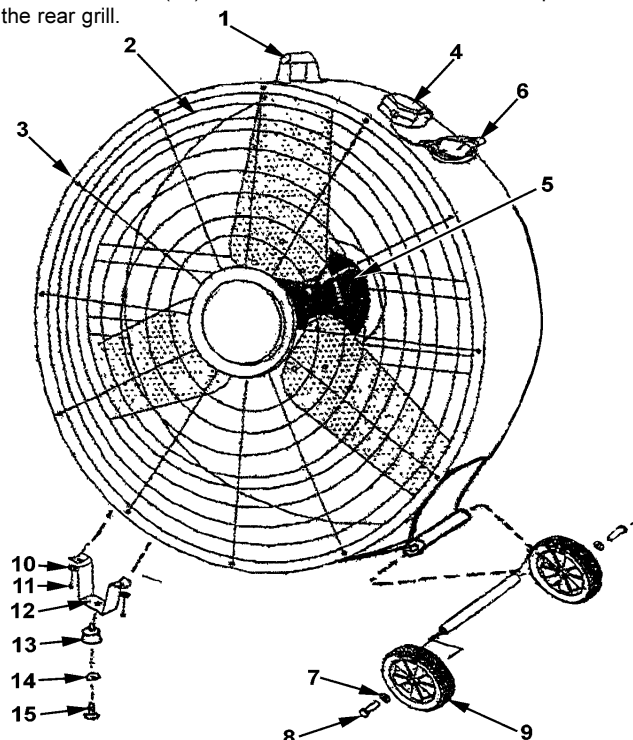

## 5. MAINTENANCE

**WARNING! Ensure the fan is disconnected from the mains power supply before attempting any of the following:**

- 5.1 Use a soft, damp cloth to clean the body of the fan.  
DO NOT splash water onto the fan and never allow water to drip onto the motor housing.  
DO NOT use solvents, petroleum, paint thinner or other chemicals to clean the fan.
- 5.2 If it becomes necessary to clean the fan blades or inside the fan body, remove the front grill by undoing the 12 screws. Wipe with a damp cloth only. Replace the grill and re-fix using the screws.
- 5.3 Should the motor, speed control box or the power lead require service or maintenance contact your local service agent.
- 5.4 When not in use place the fan in its original box or cover the fan to protect from dust, and store in a safe, dry, childproof location.

### Declaration of Conformity

We, the sole importer into the UK, declare that the product listed here is in conformity with the following standards and directives.

**INDUSTRIAL HIGH VELOCITY  
DRUM FAN - 30" 230V  
Model: HVD30**  
89/336/EEC EMC Directive  
73/23/EEC Low Voltage Directive  
93/68/EEC CE Marking Directive



The construction file for this product is held by the Manufacturer and may be inspected, by a national authority, upon request to Jack Sealey Ltd.

Signed by Mark Sweetman

20th January 2005

For Jack Sealey Ltd.  
Sole importer into the UK  
of Sealey Power Products.

**NOTE:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. **IMPORTANT:** No liability is accepted for incorrect use of this equipment. **WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim. **INFORMATION:** For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.

**SEALEY POWER  
PRODUCTS**

**Sole UK Distributor, Sealey Group, Bury St. Edmunds, Suffolk.**



01284 757500



01284 703534



www.sealey.co.uk



sales@sealey.co.uk

HVD30 - 2 - 190405

### Get In Touch



Call: 0845 6880112



Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH