




AD-15-VS-100-040





Evaporative cooler with top air outlet

	DESCRIPTION	UNITS	DATA
AIR FLOW	Air flow	m ³ /h	17.145
	Available static pressure	Pa	100
ENGINE	Rated power	kW	4,00
	Nominal consumption	A	8,46 A (400V III) 14,70 A (230V III)
	Speeds	Units	1 speed / frequency inverter
	Tension	V/Phases/Hz	400/III/50 Hz
	Regulation type	-	1 speed / frequency inverter
FAN	Typo	-	Centrifuge
	Diameter	mm	-
	Speed	Rpm	611 (PM-118 PV-280)
	Drive belts	Units	2 x XPZ 1450
PUMP	Model	-	EBM ALPHA 45/15
	Power / Nominal consumption	-	50 W / 0,17 A
	Flow (2m height)	l/m	25
	Tension	V/Phases/Hz	230/I/50
	Level switch	-	Optional
COOLING	Panel type	-	5090
	Dimensions	mm	790x900x100
	Quantity	Units	4
	Total panel surface	m ²	2,84
	Panel air speed	m/s	1,67
	Panel efficiency	%	87
	Temperature impulsion (40°C – 30% HR)	°C	27,0 °C
	Pre filter G4	-	Optional
SOUND LEVEL	Sound level	dB (A) 3m	70
CONNECTIONS	Inlet solenoid valve	Inches	½"
	Water evacuation	Inches	1 ¼"
	Overflow	Inches	1"
CLEANING SYSTEM	Automatic emptying	-	Yes
	UV lamp	-	Optional
CONTROL TYPE	Electric panel 1 speed	-	Optional
	Electric panel with frequency inverter	-	Optional
DIMENSIONS	Overall dimensions	Width/Length/Height	1135x1135x1304mm
	Mouthpiece connexion dimensions	Width/length	560x485mm
	Empty weight / operating	Kg	184 / 204
CERTIFICATES			CE

 METALURGICA MANLLEUENSE, S.A. | Tel. +34 93 851 15 99 | www.metmann.com
 C/Fontcuberta, 32-36 | 08560-Manlleu (Barcelona) SPAIN

Get In Touch

 Call: 0845 6880112
 Email: info@adremit.co.uk


Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH




AD-15-VS-100-040

Evaporative cooler with top air outlet



Prestaciones AD-15 (4 kW)

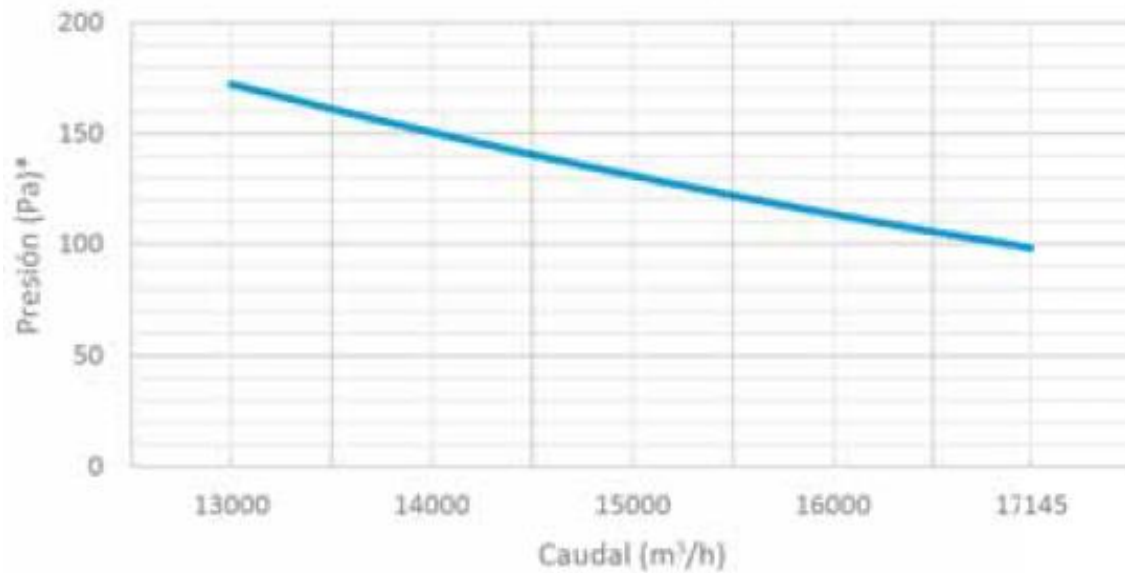

Standard design details



- Water tray made of polyamide
- Corner and central posts in stainless steel AISI-304
- Upper roof made of polyamide
- Inlet and outlet side grids in galvanised steel with polyester powder coating (INOX version in AISI-304)
- Cooling panels type 5090 of 100mm thick
- Galvanised steel centrifugal fan unit
- Automatic draining system patented by MET MANN
- SCHAEFFLER CORROTECT corrosion-resistant bearings with protective caps
- Maintenance-free QUAD-POWER4 power transmission belts from GATES
- EBM ALPHA 45/15 EBM water pump with external rotor motor
- High efficiency electric motor IE3 IP 55
- Normally closed inlet solenoid valve
- Half-turn opening system for access to the inside of the unit
- Base stand with legs supplied as standard for ease of transport and installation

Custom manufacturing

- Air filtration to comply with BRC food standards
- Customized air flows and pressures
- ATEX motors for explosive environments, etc...

METALURGICA MANLLEUENSE, S.A. | Tel. +34 93 851 15 99 | www.metmann.com
C/Fontcuberta, 32-36 | 08560-Manlleu (Barcelona) SPAIN

Get In Touch

 Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH




Technical data sheet

AD-15-VS-100-040

Evaporative cooler with top air outlet



Overall dimensions

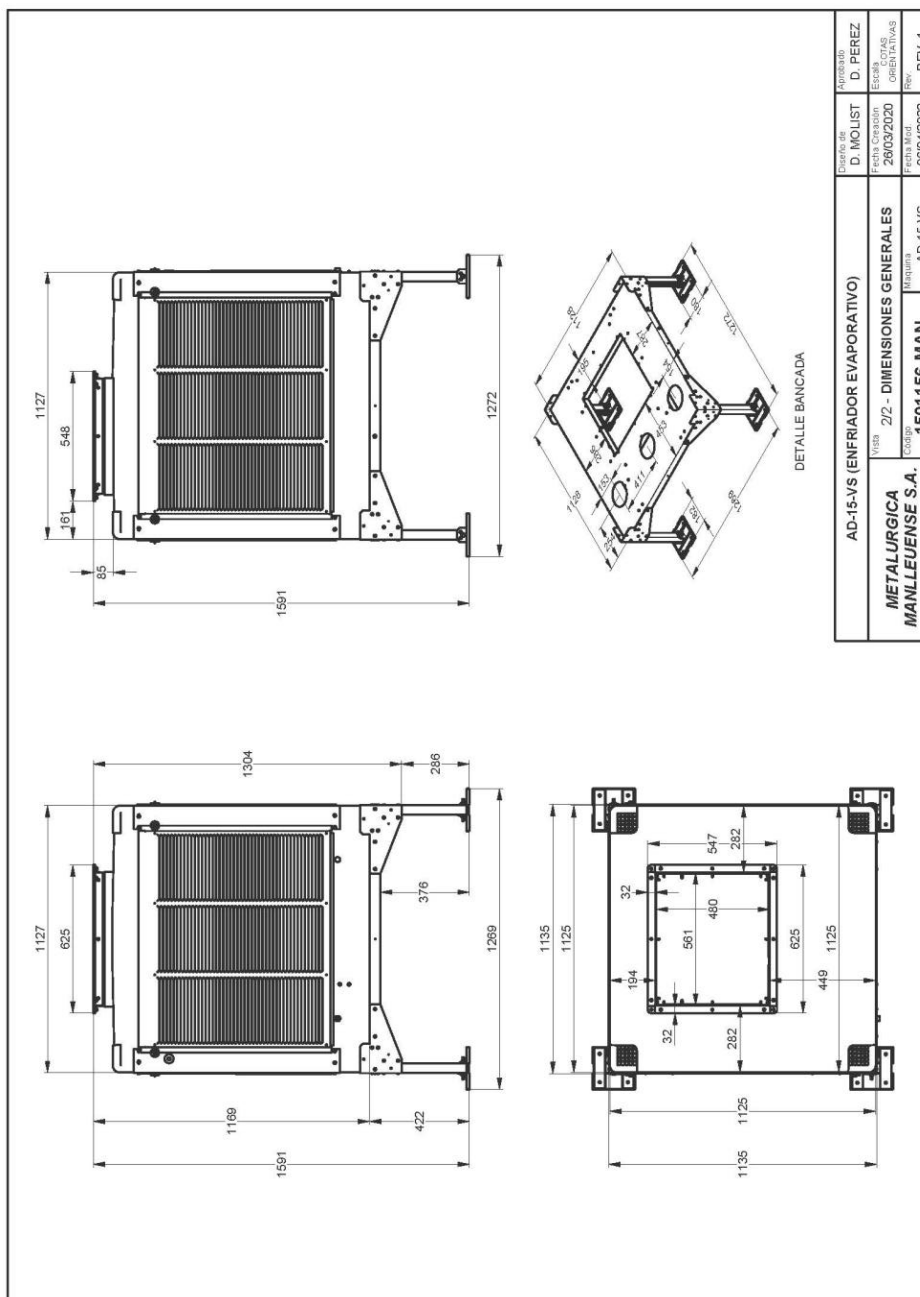

METALURGICA MANLLEUENSE, S.A. | Tel. +34 93 851 15 99 | www.metmann.com
C/Fontcuberta, 32-36 | 08560-Manlleu (Barcelona) SPAIN

Get In Touch

Call: [0845 6880112](tel:08456880112)
Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH






AD-15-VS-100-040

Evaporative cooler with top air outlet



Surface installation with diffuser

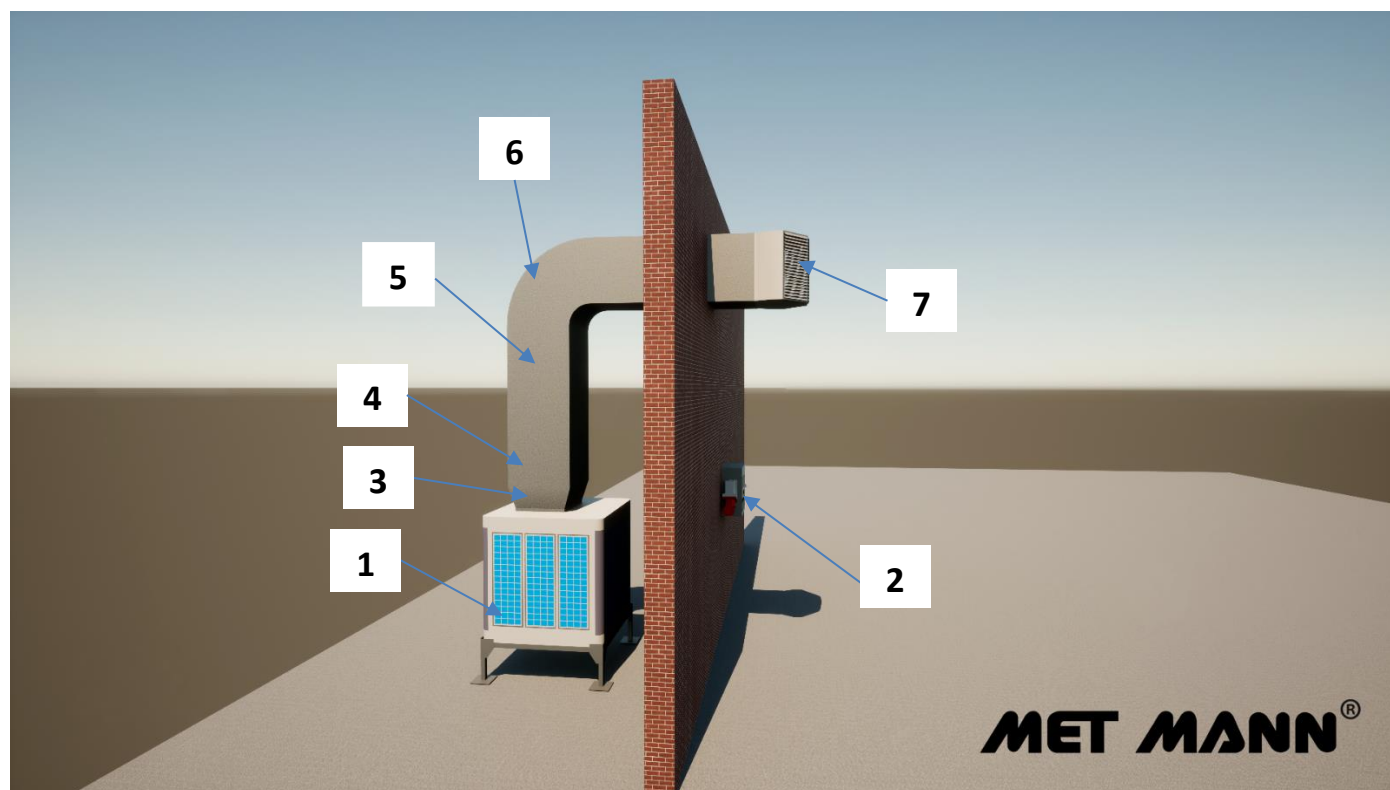

POSITION	DESCRIPTION	UNITS	STANDARD	INOX
01	Evaporative cooler AD-15-VS-100-040	1	15011561040S	15011561040I
02	Electric panel 1 speed / frequency inverter	1	0415CMS040400	0415CF040400
03	Coupling (564x486/600x600)	1	180547406060	
04	Flexible joint JE-15 (600x600)	1	1805AV6060	
05	Straight section TR-15 (600x600x1000)	1	1805TR600	
06	Curved section 90° TC-15 (600x600)	1	1805TC600	
07	3-way air diffuser DCH-3-15	1	0323150115301	
-	Pre filter PG4-15	4	04150115G412	04150115G412I
-	UV WATER treatment	1	031501101010M	
-	Protective case FU-15-VS	1	03021502009W	

 METALURGICA MANLLEUENSE, S.A. | Tel. +34 93 851 15 99 | www.metmann.com
 C/Fontcuberta, 32-36 | 08560-Manlleu (Barcelona) SPAIN

Get In Touch


 Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address


Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH

AD-15-VS-100-040

Evaporative cooler with top air outlet



Surface installation with impulsion nozzles

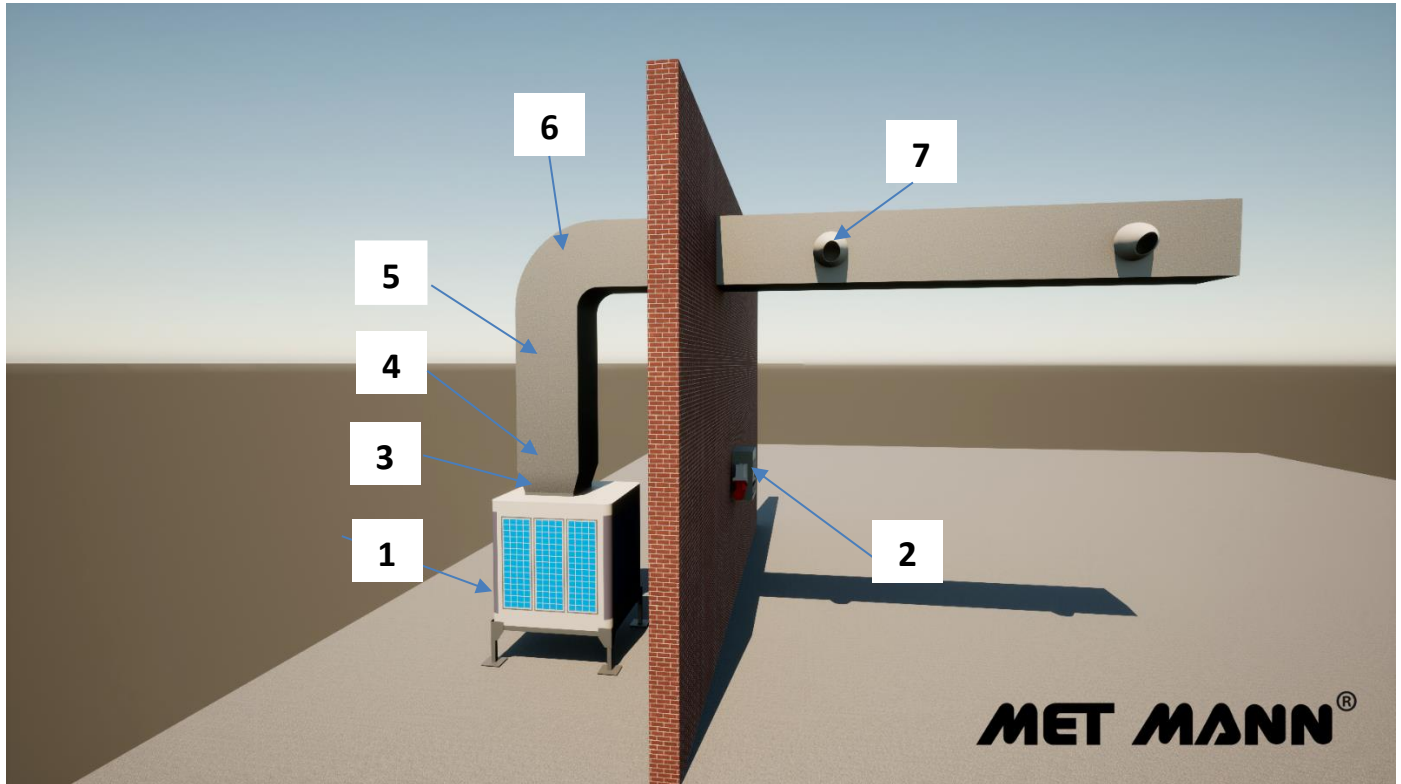

POSITION	DESCRIPTION	UNITS	STANDARD	INOX
01	Evaporative cooler AD-15-VS-100-040	1	15011561040S	15011561040I
02	Electric panel 1 speed / frequency inverter	1	0415CMS040400	0415CF040400
03	Coupling (564x486/600x600)	1	180547406060	
04	Flexible joint JE-15 (600x600)	1	1805AV6060	
05	Straight section TR-15 (600x600x1000)	1	1805TR600	
06	Curved section 90° TC-15 (600x600)	1	1805TC600	
07	High induction nozzles CI-300	1	04150PAKCONO	
-	Pre filter PG4-15	4	04150115G412	04150115G412I
-	UV WATER treatment	1	031501101010M	
-	Protective case FU-15-VS	1	03021502009W	

METALURGICA MANLLEUENSE, S.A. | Tel. +34 93 851 15 99 | www.metmann.com
 C/Fontcuberta, 32-36 | 08560-Manlleu (Barcelona) SPAIN

Get In Touch

Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH

