

CAP-CT

Multi-Nozzle Diffuser

Data Sheet



Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH



Table of Contents

Description	1
Design	2
Dimensions	4
Ordering Code	5
Technical Parameters	6
Installation, Maintenance & Operation	8
Transport & Storage	8
Supplement	8
Related Product	8



Get In Touch

 **Call:** [0845 6880112](tel:08456880112)
 **Email:** info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH





Description

CAP-CT is a multi-nozzle diffuser with a plenum box, mainly intended for air supply in comfort ventilation systems for offices, shops, medical rooms, school classrooms, etc., installed in open space under the ceiling.

Highlights

- Versatile adjustability of air discharge patterns
- Excellent air induction and mixing even with small air flow volumes, fit for VAV ventilation
- High air flow capacity with low noise and moderate pressure drop
- Compact design with adjustment damper and flow measurement probes for supply and extract

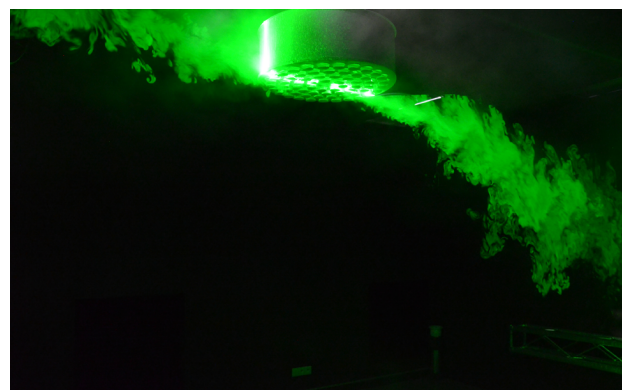


Fig. 1: Air flow visualisation (left: vertical discharge pattern; right: horizontal discharge pattern)

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

Design

The CAP-CT body is made from galvanized steel, composed of the plenum box with a vertically from top oriented rubber gasket sealed circular connection and diffuser plate with polymer nozzles, attached by permanent magnets. The nozzles can be rotated by 360° in the plane of the diffuser plate. The proper directional adjustment of the individual nozzles results in the desired air discharge pattern. The connection spigot is equipped with an air flow adjustment damper and the air flow measurement probe tapings for air supply and extract. All these parts are accessible from outside, so measurement and adjustment require no dismantling of the diffuser.

For the installation of the diffuser, there are two thread nuts in the upper part of the plenum box. They are fit for fixing on the suspended thread bar.

Product Parts

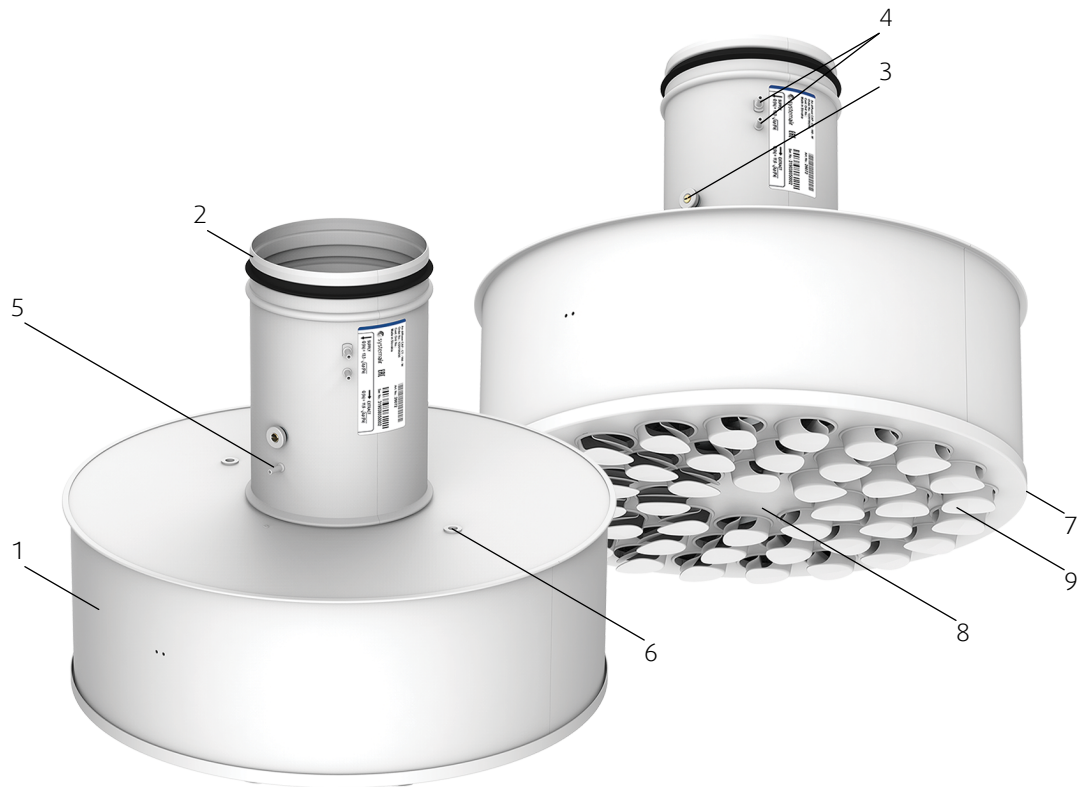


Fig. 2: Components of CAP-CT

Legend

1	Plenum box
2	Connection with rubber gasket
3	Damper (adjustable from outside)
4	Supply air measurement tapping
5	Extract air measurement tapping
6	Nut M8 for fixing on thread bar
7	Magnets to hold diffuser plate
8	Diffuser plate
9	Nozzles

Get In Touch

 Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH

Setup Possibilities

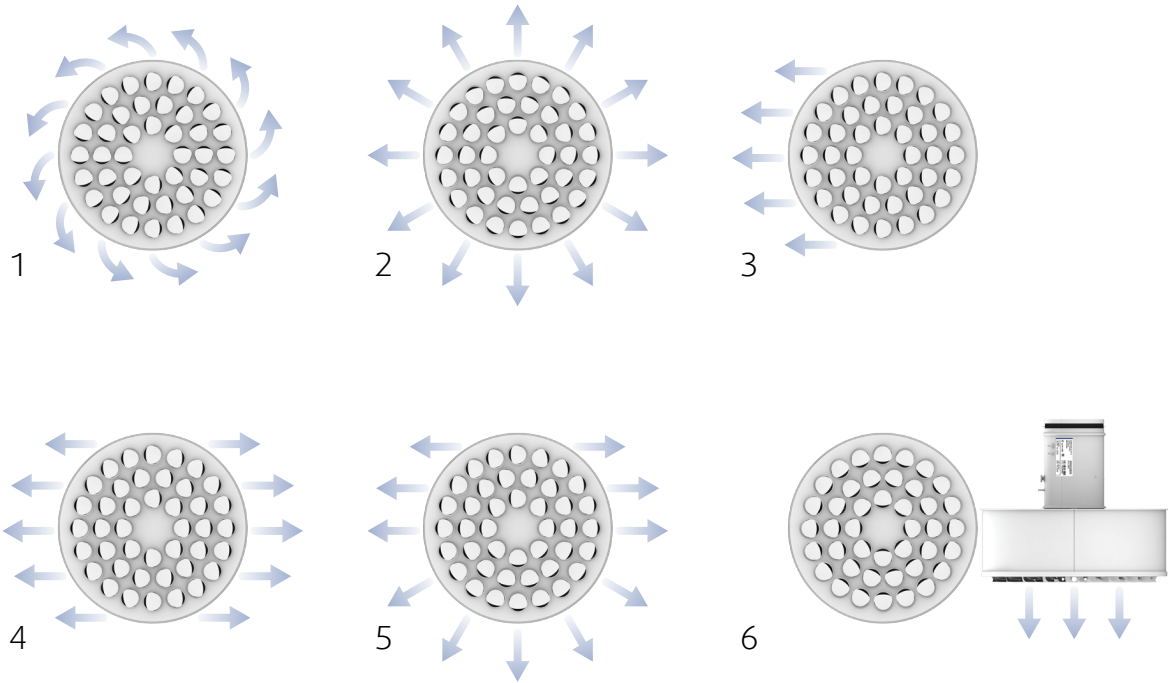


Fig. 3: Different deflector setup and resulting air discharge patterns

Legend

1	Tangential horizontal swirl discharge
2	Radial horizontal omnidirectional discharge
3	Horizontal discharge, single direction
4	Horizontal discharge, 2 directions
5	Horizontal discharge, 3 directions
6	Vertical discharge

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH

Dimensions

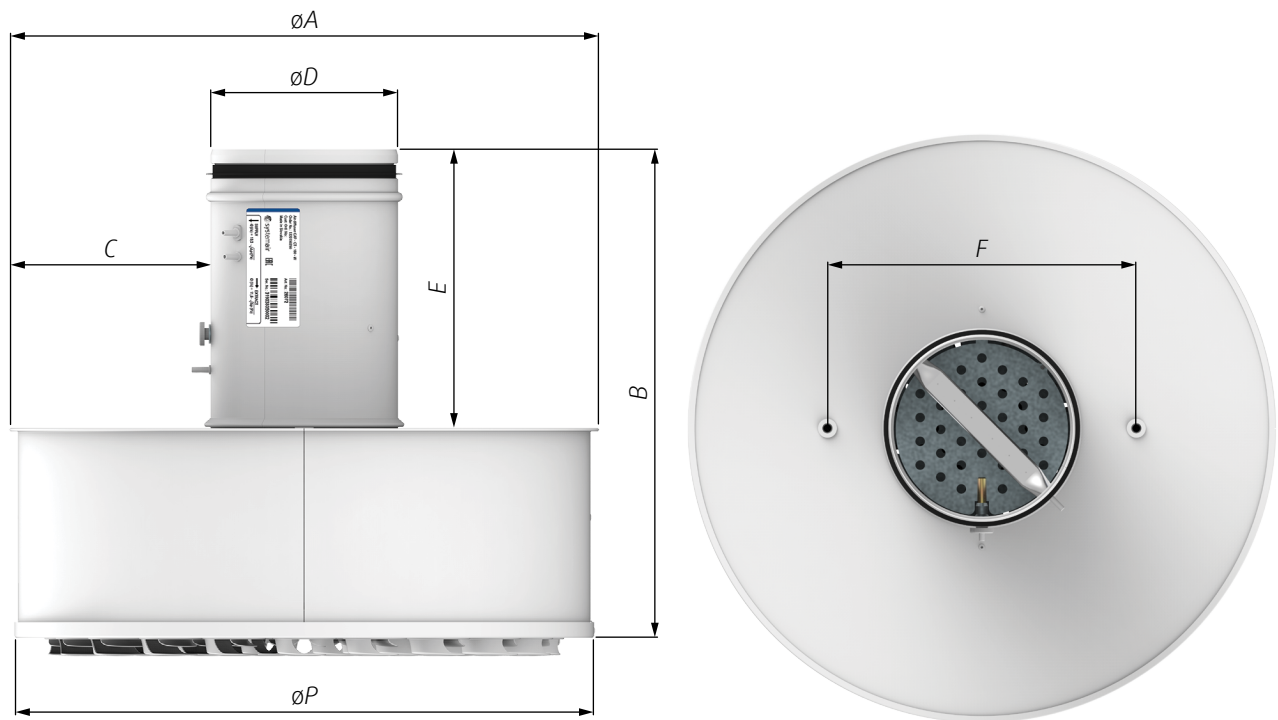


Fig. 4: Dimensions of CAP-CT

Tab. 1: Dimensions of CAP-CT

Type	$\varnothing D$	$\varnothing A$	$\varnothing P$	B	C	E	F	m
	mm							
CAP-CT-100	98	324	314	315	110	194	200	2,9
CAP-CT-125	123	408	398	345	141	204	225	3,8
CAP-CT-160	158	497	487	409	168	234	260	5,9
CAP-CT-200	198	597	587	469	198	269	300	8,1
CAP-CT-250	248	608	598	525	178	294	350	9,1
CAP-CT-315	313	632	622	634	158	339	415	11,1

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH



Ordering Code

		CAP-CT-	<input type="checkbox"/>	<input type="checkbox"/>
			100	
			125	
			160	
			200	
			250	
Size - inlet \varnothing (mm)			315	
	RAL9003 signal white		SW	
	RAL9010 white		W	
Surface finish ¹⁾	Other RAL colour		RALXXXX	

NOTE: 1) If no colour is stated in the ordering code, the diffuser will be delivered in the RAL 9003 signal white colour.

Example of the Ordering Code

CAP-CT-200-SW

Diffuser of size 200 mm, signal white colour.

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard, Settle, North Yorkshire, BD24 9RH

Technical Parameters

Legend

p_s	Pa	Pressure drop
q_v	m ³ /h, l/s	Air flow volume
L_{WA}	dB(A)	A-weighted total sound power level
L_W	dB	Non-weighted total sound power level
ΔT	K	Temperature difference Supply air - Room air
$L_{0,2}$	m	Air throw length with terminal velocity 0,2 m/s

L_x	m	Air throw length calculated for specific terminal velocity
x	m/s	Terminal velocity in range of 0,1 m/s ... 1 m/s
\downarrow 0%, 25%, 50%, 75%, \uparrow 100%		The plenum box damper positions in pressure drop/ noise diagrams are represented as a percentage. \downarrow 0% is a fully closed damper. \uparrow 100% is a fully open damper.

Calculation of Air Throw for Different Terminal Velocities

$$L_x = L_{0,2} \times 0,2/x$$

Correction Tables

NOTE: For vertical distribution see Systemair DESIGN.

Tab. 2: Correction factors for horizontal distribution

$\Delta T = -10$ K	$\Delta T = 10$ K
0,75	0,83

Tab. 3: Correction factors for horizontal distribution - alternative nozzle settings

4 way	3 way	2 way	1 way
1,40	1,90	2,30	3,30

e.g.: $L_{(\Delta T = 10 K)} = L_{(\Delta T = 0 K)} \times 0,83$

e.g. for 3 way horizontal diffusion: $L_{0,2 (3 \text{ way})} = L_{0,2 (radial)} \times 1,9$

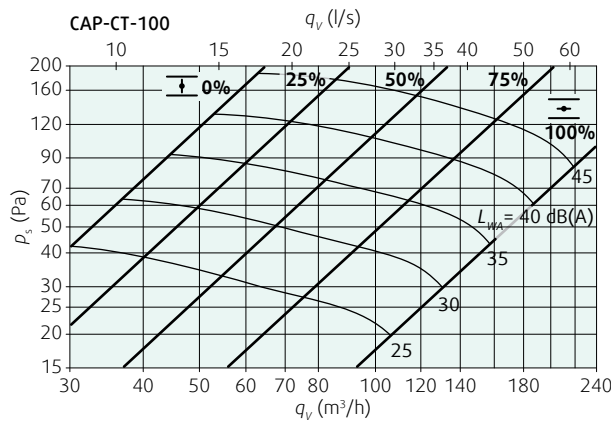


Diagram 1: Pressure drop & A-weighted total sound power level depending on air flow volume

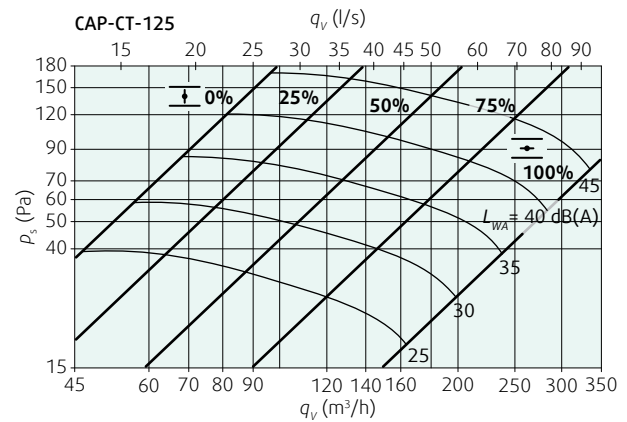


Diagram 3: Pressure drop & A-weighted total sound power level depending on air flow volume

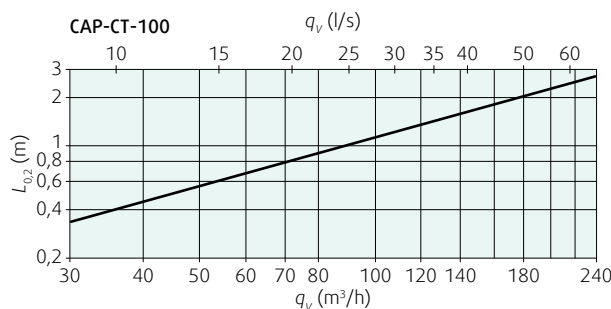


Diagram 2: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

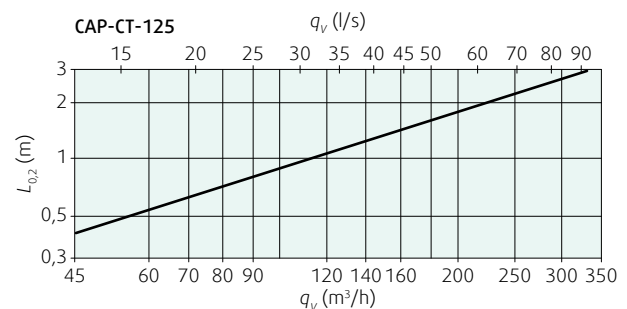


Diagram 4: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume



Get In Touch

Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard, Settle, North Yorkshire, BD24 9RH



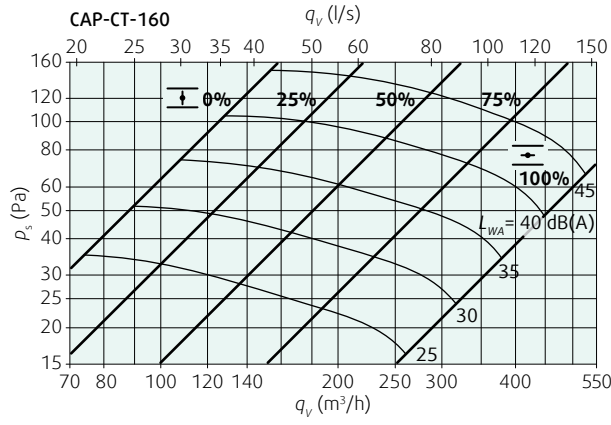


Diagram 5: Pressure drop & A-weighted total sound power level depending on air flow volume

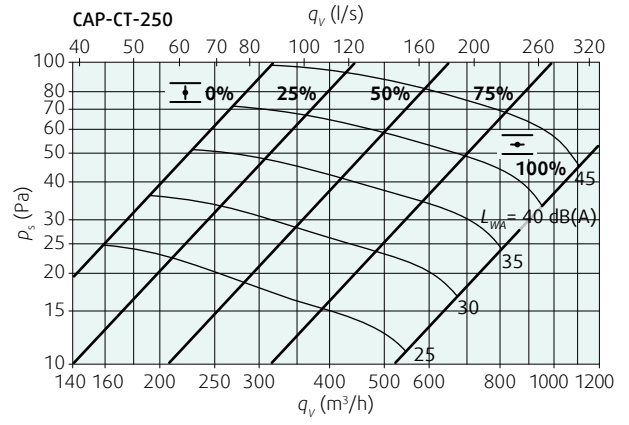


Diagram 9: Pressure drop & A-weighted total sound power level depending on air flow volume

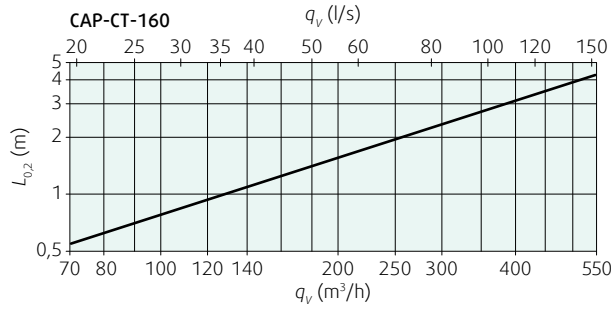


Diagram 6: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

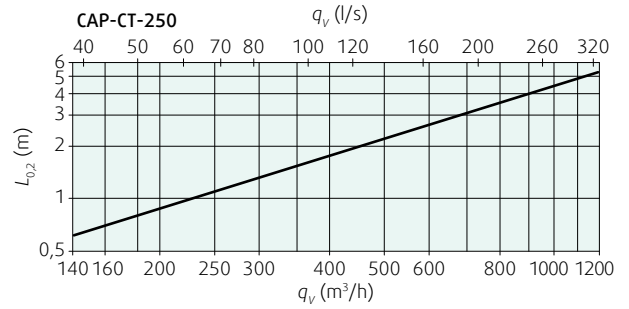


Diagram 10: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

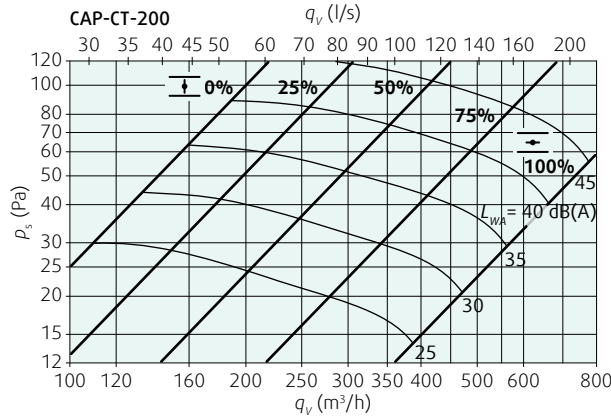


Diagram 7: Pressure drop & A-weighted total sound power level depending on air flow volume

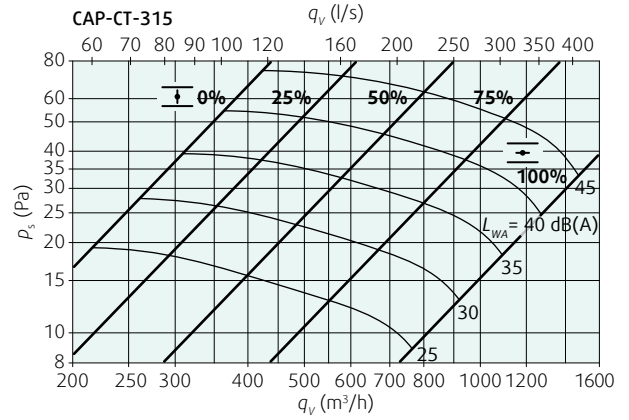


Diagram 11: Pressure drop & A-weighted total sound power level depending on air flow volume

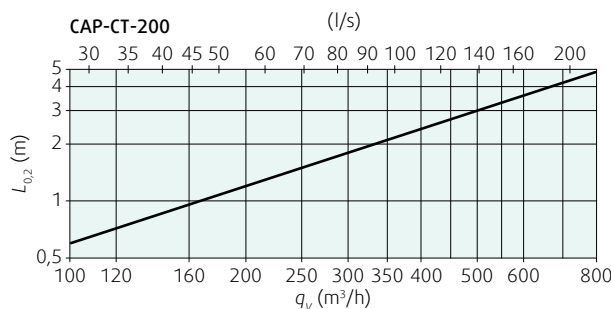


Diagram 8: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

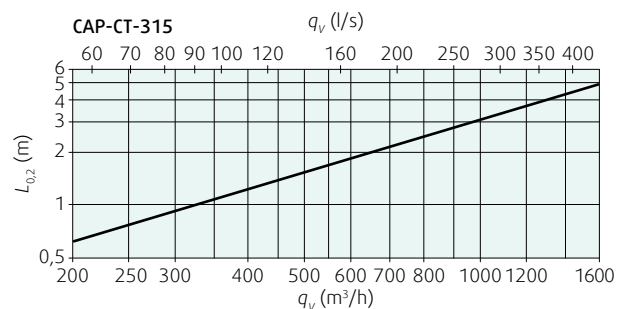


Diagram 12: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

Installation, Maintenance & Operation

Information about installation, maintenance and operation is available in the "UserManual_CAP-CT" document.

Transport & Storage

Dry indoor conditions with a temperature range of -40°C to +50°C.

Supplement

Any deviations from the technical specifications contained herein and the terms should be discussed with the manufacturer. We reserve the right to make any changes to the product without prior notice, provided that these changes do not affect the quality of the product and the required parameters.

Current information on all products is available at www.systemair.com

Related Product



CAP-C

Multi-Nozzle Diffuser

Product information is available within the technical documentation "DataSheet_CAP-C" and at www.systemair.com



Get In Touch



 Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH



Get In Touch

 **Call:** [0845 6880112](tel:08456880112)
 **Email:** info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH







www.systemair.com

IM05-Systemair - November 2018 - DataSheet_CAP-CT

Get In Touch

 **Call:** [0845 6880112](tel:08456880112)
 **Email:** info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

