



APPLICATIONS

A range of low profile floor level convectors for inconspicuous perimeter heating, often used in offices, meeting rooms, reception areas, under pew heating in churches and for anti frost protection. Ideal where a noise-free, reliable heater is required.

FEATURES


- Rugged low profile 22 gauge steel cabinet
- Noise free, centrally fixed element with floating ends
- Long life, aluminium finned stainless steel element
- Quick heat up and efficient heat distribution
- Multi-hole mounting for quick installation
- Scuff resistant textured ivory powder coated finish (RAL9002)
- Over temperature safety cut-out along full length of element
- Optional integral thermostat
- Optional integral tamper proof thermostat



INSTALLATION

Fixed at low level as single units or as part of a full wall length installation. Multi hole fixing for ease of mounting. The unit should be securely fixed.

All electrical connections should be made by a suitably qualified person in accordance with the latest edition of the IEE Requirements ; for Electrical Installation (BS 7671:2008).

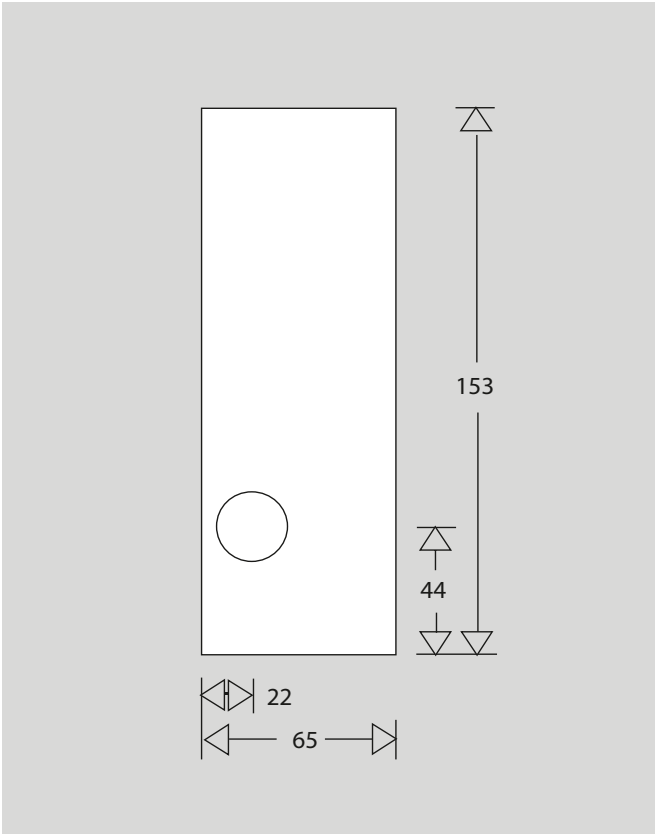

| CAT No. | | Watts | Volts | Length mm | Height mm | Depth mm | Weight kgs | |
|----------|----------------------------------|-------|-------|-----------|-----------|----------|------------|--|
| CFS-0375 | | 375 | 230 | 610 | 153 | 65 | 2.0 | |
| CFS-0500 | | 500 | 230 | 712 | 153 | 65 | 2.5 | |
| CFS-0750 | | 750 | 230 | 1016 | 153 | 65 | 3.0 | |
| CFS-1000 | | 1000 | 230 | 1220 | 153 | 65 | 4.0 | |
| CFS-1250 | | 1250 | 230 | 1525 | 153 | 65 | 5.5 | |
| CFS-1500 | | 1500 | 230 | 1830 | 153 | 65 | 6.0 | |
| CFS-2000 | | 2000 | 230 | 2440 | 153 | 65 | 8.0 | |
| CFS-TB | Integral thermostat | | | | | | | |
| CFS-TTB | Integral tamper proof thermostat | | | | | | | |

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH