



APPLICATIONS

A range of very robust tubular heaters for heating applications where a waterproof heavy duty convector heater is required. Can be used in applications where washing down may occur.

Typical locations include dairies, food storage, mines and quarries, shipboard, container storage, kennels, catteries, zoos, greenhouses and plant/lift rooms.

FEATURES

- Very robust construction
- Heavy duty finned steel tube
- Reliable mineral insulated metal sheathed element
- Matt black high temperature powder coated finish
- Suitable for floor or wall mounting (must be horizontal)
- Large terminal box for easy connections
- Terminal box welded to tube and sealed to IP65
- Slotted fixings for easier positioning
- 230V and 110V units as standard (other voltages also available)
- Special 24V 250W unit for mobile and small boat applications



OPTIONS

- Remote exterior frost thermostat to IP65 (CXFST)
- Remote interior frost thermostat (CFST)
- Remote interior room thermostat (CRST-16)
- Wire guard for added safety (CWG)
- Remote interior room thermostat - tamper proof (CTRT-10)

Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH



INSTALLATION

CFT heaters must be mounted horizontally and must not be covered.


Although surface temperatures may be considered acceptable for most applications, the optional wire guard is recommended in areas where contact with the hot surface is to be avoided, for example animal enclosures or tight spaces such as crane cabs etc.

Electrical connection is made via a 20mm hole to easily accessible screw terminals inside the connection box.

If installed in wet conditions suitable glands must be used to ensure IP65 integrity is maintained.

Air temperature control, if required, is by remote thermostat.

All electrical connections should be made by a suitably qualified person in accordance with the latest edition of the IEE Requirements for Electrical Installation (BS 7671:2008).

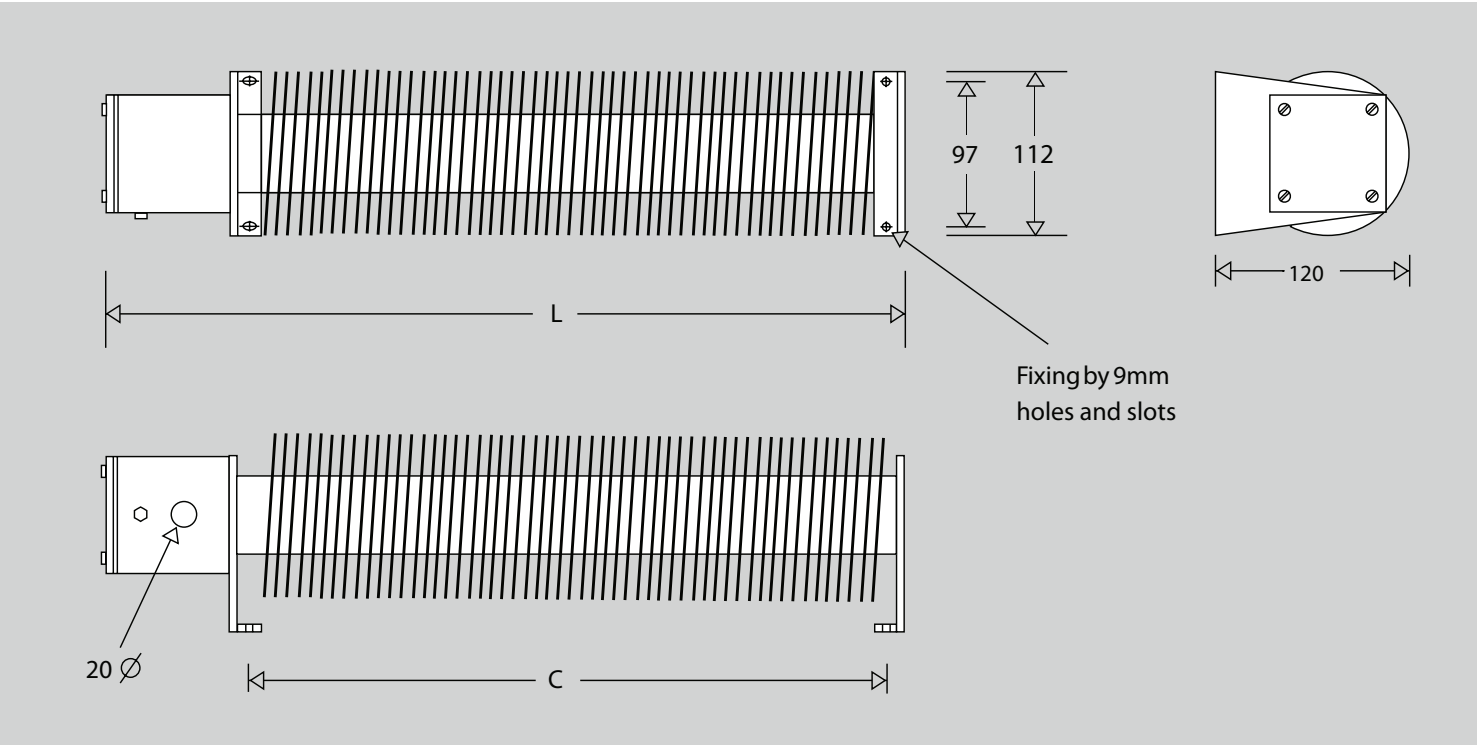

CAT No.		Watts	Volts	Length (L) mm	Fix Cent (C) mm	Height mm	Depth mm	Weight kgs	
CFT-0300		300	230	360	253	120	112	4.2	
CFT-0500		500	230	585	478	120	112	7.0	
CFT-0750		750	230	810	703	120	112	9.8	
CFT-1000		1000	230	1035	928	120	112	12.6	
CFT-1500		1500	230	1485	1378	120	112	18.3	
CFT-2000		2000	230	1935	1828	120	112	23.9	
CFT-0301		300	110	360	253	120	112	4.2	
CFT-0501		500	110	585	478	120	112	7.0	
CFT-0751		750	110	810	703	120	112	9.8	
CFT-1001		1000	110	1035	928	120	112	12.6	
CFT-1501		1500	110	1485	1378	120	112	18.3	
CFT-2001		2000	110	1485	1828	120	112	18.3	
CWG-0300	Wire guard for 0300/0301			400		155	155	0.8	
CWG-0500	Wire guard for 0500/0501			600		155	155	1.0	
CWG-0750	Wire guard for 0750/0751			850		155	155	1.2	
CWG-1000	Wire guard for 1000/1001			1100		155	155	1.5	
CWG-1500	Wire guard for 1500/1501/2001			1550		155	155	2.0	
CWG-2000	Wire guard for 2000			2000		155	155	2.5	

Get In Touch

Call: 0845 6880112
Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH