

APPLICATIONS

Robust fan heaters for commercial areas such as entrance lobbies, stairways, corridors and waiting rooms.

Ideal for heavy traffic areas where hard knocks are possible. Capacities, up to 4.8kW, for area heating requirements. The integral tamper proof thermostat provides a cost effective way of controlling energy usage.


FEATURES

- Suitable for surface or space saving recess mounting
- High reliability heavy duty finned metal sheathed elements
- Low speed, 600rpm, motor with vane axial fan
- Auto reset over temperature cut-out
- Fan delay switch on thermostat on/off cycle
- Tamper proof thermostat and on/off switch (not ceiling version)
- Heavy duty steel louvred grille with extruded aluminium frame
- Ceiling mounting version available
- Dark brown powder coated finish with anodised natural aluminium frame



INSTALLATION

The heater is recommended for vertical mounting. It should not be mounted closer than 200mm to any vertical surface, ceiling or floor. Each unit is supplied for recess mounting. Surface mounting requires the optional surface box (CQAC-S). The unit should be securely fixed and electrical connections made by a suitably qualified person in accordance with the latest edition of the IEE Requirements for Electrical Installation (BS7671:2008).

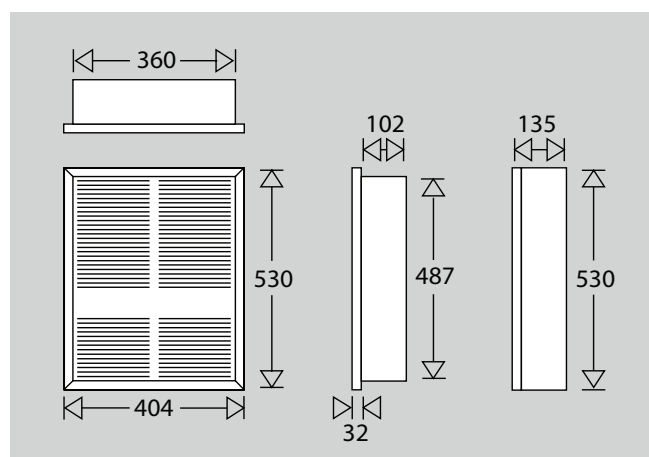

Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH



APPLICATIONS

Architecturally styled heavy duty fan heaters for commercial areas. Rugged construction without the 'industrial' look make the CHDA an ideal choice for entrance lobbies, stairways and waiting rooms. Higher capacities, up to 5kW, for larger area heating requirements. The integral tamper proof thermostat provides efficient energy control at low installation cost.


FEATURES

- Suitable for surface or space saving recess mounting
- High reliability heavy duty finned metal sheathed elements
- Totally enclosed permanently lubricated motor
- Manual reset over temperature safety cut-out
- Integral thermostat that can be tamper proof
- Heavy duty welded steel louvred grille with aluminium frame
- Quiet low speed axial fan
- Dark brown powder coated finish with anodised natural aluminium frame

INSTALLATION

The units are for vertical mounting only, not less than 300mm from any vertical surface or the floor. Each unit is supplied for recess mounting, surface mounting requires the optional surface box (CHDA-S). The unit should be securely fixed.

All electrical connections should be made by a suitably qualified person in accordance with the latest edition of the IEE Requirements for Electrical Installation (BS 7671:2008).

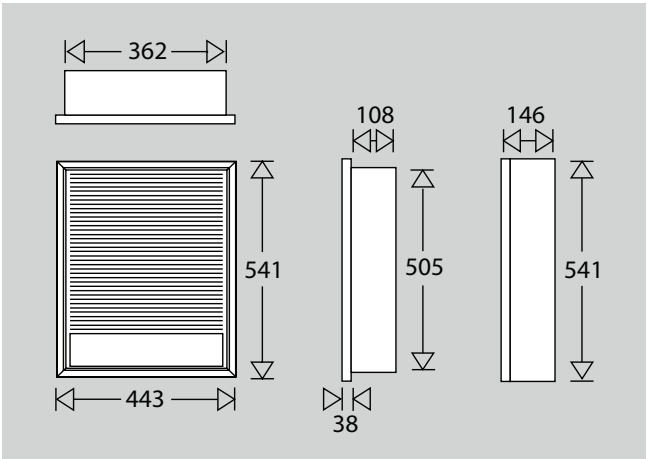

CAT No.		Watts	Volts	Air Vol m3/hr	Length mm	Height mm	Depth mm	Weight kgs	
CQAC-1500	For recess mounting	1500	230	240	404	530	135	10.0	
CQAC-2000	For recess mounting	2000	230	240	404	530	135	10.0	
CQAC-3000	For recess mounting	3000	230	240	404	530	135	10.0	
CQAC-4000	For recess mounting	4000	230	240	404	530	135	10.0	
CQAC-4800	For recess mounting	4800	230	240	404	530	135	10.0	
CQAC-S	Surface mounting box				404	530	103	1.0	

CAT No.		Watts	Volts	Air Vol m3/hr	Length mm	Height mm	Depth mm	Weight kgs	
CHDA-2000	For recess mounting	2000	230	340	443	541	146	12.0	
CHDA-3000	For recess mounting	3000	230	340	443	541	146	12.0	
CHDA-4000	For recess mounting	4000	230	340	443	541	146	12.0	
CHDA-5000	For recess mounting	5000	230	340	443	541	146	12.0	
CHDA-S	Surface mounting box				443	541	108	1.0	

*new lower price

Get In Touch

Call: 0845 6880112
Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH