

APPLICATIONS

Fan forced wall insert heaters are compact heaters for those hard to heat places such as entrance lobbies, security gatehouses, checkout counters etc. Also available at 110V for site and mobile use.

FEATURES

- Loadings from 1000W to 2000W
- Suitable for surface or space saving recess mounting
- Three position mounting, giving three airflow options
- Finned tubular steel element
- Auto reset over temperature cut-out
- Beige powder coated finish
- Available at 110V for site and mobile applications
- Optional integral thermostat




INSTALLATION

The heaters are for horizontal or vertical mounting with top discharge. Clearances to vertical surfaces or floor must be 150mm.

Each unit is supplied for recess mounting. Surface mounting requires the optional surface box (CWD-S).

The heater should be securely fixed.

All electrical connections made by a suitably qualified person in accordance with the latest edition of the IEE Requirements for Electrical Installation (BS7671:2008).

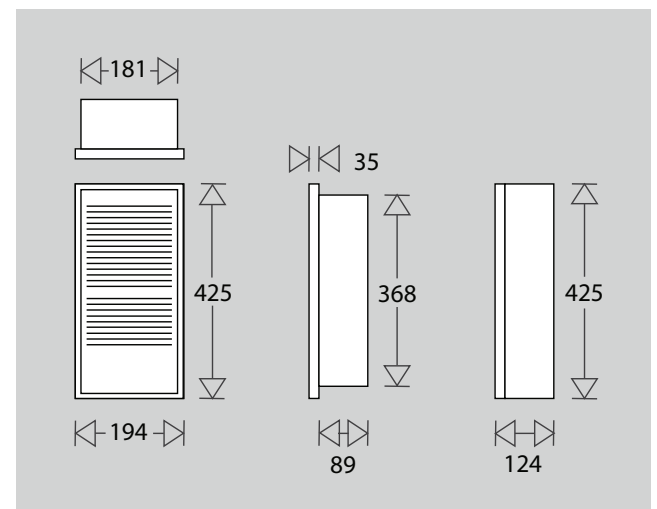

CAT No.		Watts	Volts	Length mm	Height mm	Depth mm	Weight kgs
CWD-1001	For recess mounting	1000	110	425	194	124	5.0
CWD-1000	For recess mounting	1000	230	425	194	124	5.0
CWD-1501	For recess mounting	1500	110	425	194	124	5.0
CWD-1500	For recess mounting	1500	230	425	194	124	5.0
CWD-2000	For recess mounting	2000	230	425	194	124	5.0
CWD-S	Surface mounting box			425	194	124	1.0
CWD-TB	Integral thermostat						

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard, Settle, North Yorkshire, BD24 9RH