



Technical data sheet

AD-55-VS-100-075





Evaporative cooler with top air outlet

	DESCRIPTION	UNITS	DATA
AIR FLOW	Air flow	m ³ /h	46.922
	Available static pressure	Pa	107
ENGINE	Rated power	kW	7,50
	Nominal consumption	A	14,3 A (400V/50Hz)
	Speeds	Units	1 speed / frequency inverter
	Tension	V/Phases/Hz	400/III/50-60 Hz
	Regulation type	-	1 speed / frequency inverter
FAN	Typo	-	Centrifugal with forward blades
	Diameter	mm	-
	Speed	Rpm	341 (PM-106 PV-450)
	Drive belts	Units	3 x QUADPOWER XPA 2430
PUMP	Model	-	WILO TM 32/7
	Power / Nominal consumption	-	250W / 1,50 A
	Flow (2m height)	l/m	115
	Tension	V/Phases/Hz	230/I/50
	Level switch	-	Yes
COOLING	Panel type	-	5090
	Dimensions	mm	1500x600x100
	Quantity	Units	12
	Total panel surface	m ²	10,80
	Panel air speed	m/s	1,20
	Panel efficiency	%	89,5
	Temperature impulsion (40°C – 30% HR)	°C	26,6 °C
	Pre filter G4	-	Optional
SOUND LEVEL	Sound level	dB (A) 3m	71
CONNECTIONS	Inlet solenoid valve	Inches	½"
	Water evacuation	Inches	1 ¼"
	Overflow	Inches	1"
CLEANING SYSTEM	Automatic emptying	-	Yes
	UV lamp	-	Optional
CONTROL TYPE	Electric panel 1 speed	-	Optional
	Electric panel with frequency inverter	-	Optional
DIMENSIONS	Overall dimensions	Width/Length/Height	2189x2189x1991mm
	Mouthpiece connexion dimensions	Width/length	935x890mm
	Empty weight / operating	Kg	575 / 770
CERTIFICATES			CE

 METALURGICA MANLLEUENSE, S.A. | Tel. +34 93 851 15 99 | www.metmann.com
 C/Fontcuberta, 32-36 | 08560-Manlleu (Barcelona) SPAIN

Get In Touch

 Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address

 Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH




AD-55-VS-100-075

Evaporative cooler with top air outlet



Prestaciones AD-55 (7,5 kW)

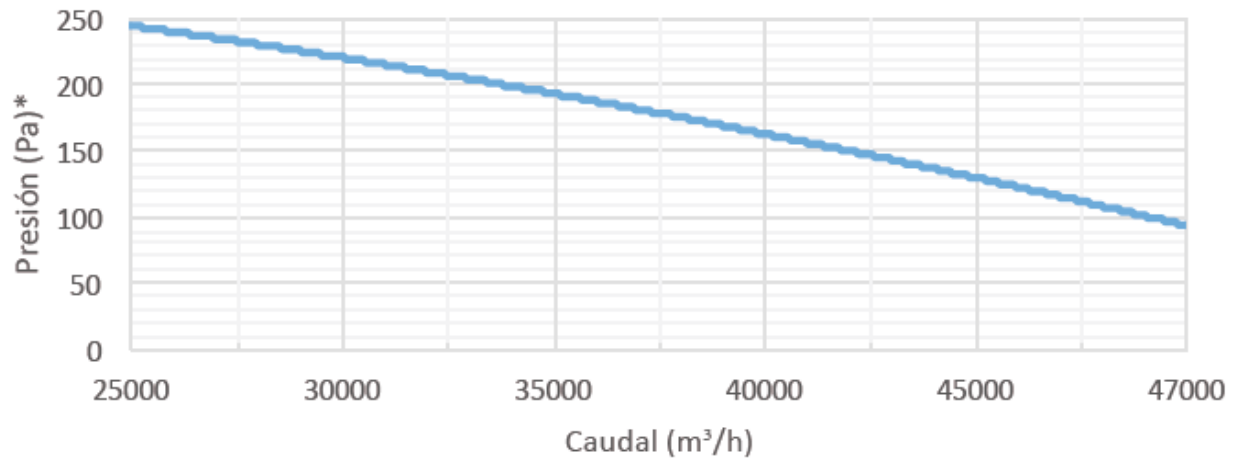

Standard design details

- Water tray made of polyamide
- Corner and central posts in stainless steel AISI-304
- Top roof, side outlet and inlet grilles in galvanised polyester powder coated (INOX version in AISI-304)
- Cooling panels type 5090 of 100mm thick
- Centrifugal fan unit with forward blades and hot-dip galvanised frame
- Automatic draining system patented by MET MANN
- SCHAEFFLER DUROTECT corrosion-resistant bearings with protective caps
- Maintenance-free QUAD-POWER4 power transmission belts from GATES
- WILO IP 68 water pump with level switch
- High efficiency electric motor IE3 IP 55
- Normally closed inlet solenoid valve
- Half-turn opening system for access to the inside of the unit
- Base stand with legs supplied as standard for ease of transport and installation

Custom manufacturing

- Air filtration to comply with BRC food standards
- Customized air flows and pressures
- ATEX motors for explosive environments, etc...

METALURGICA MANLLEUENSE, S.A. | Tel. +34 93 851 15 99 | www.metmann.com
C/Fontcuberta, 32-36 | 08560-Manlleu (Barcelona) SPAIN

Get In Touch

 Call: 0845 6880112
 Email: info@adremmit.co.uk

Our Address

Puravent, Adremmit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH




Technical data sheet

AD-55-VS-100-075

Evaporative cooler with top air outlet



Overall dimensions

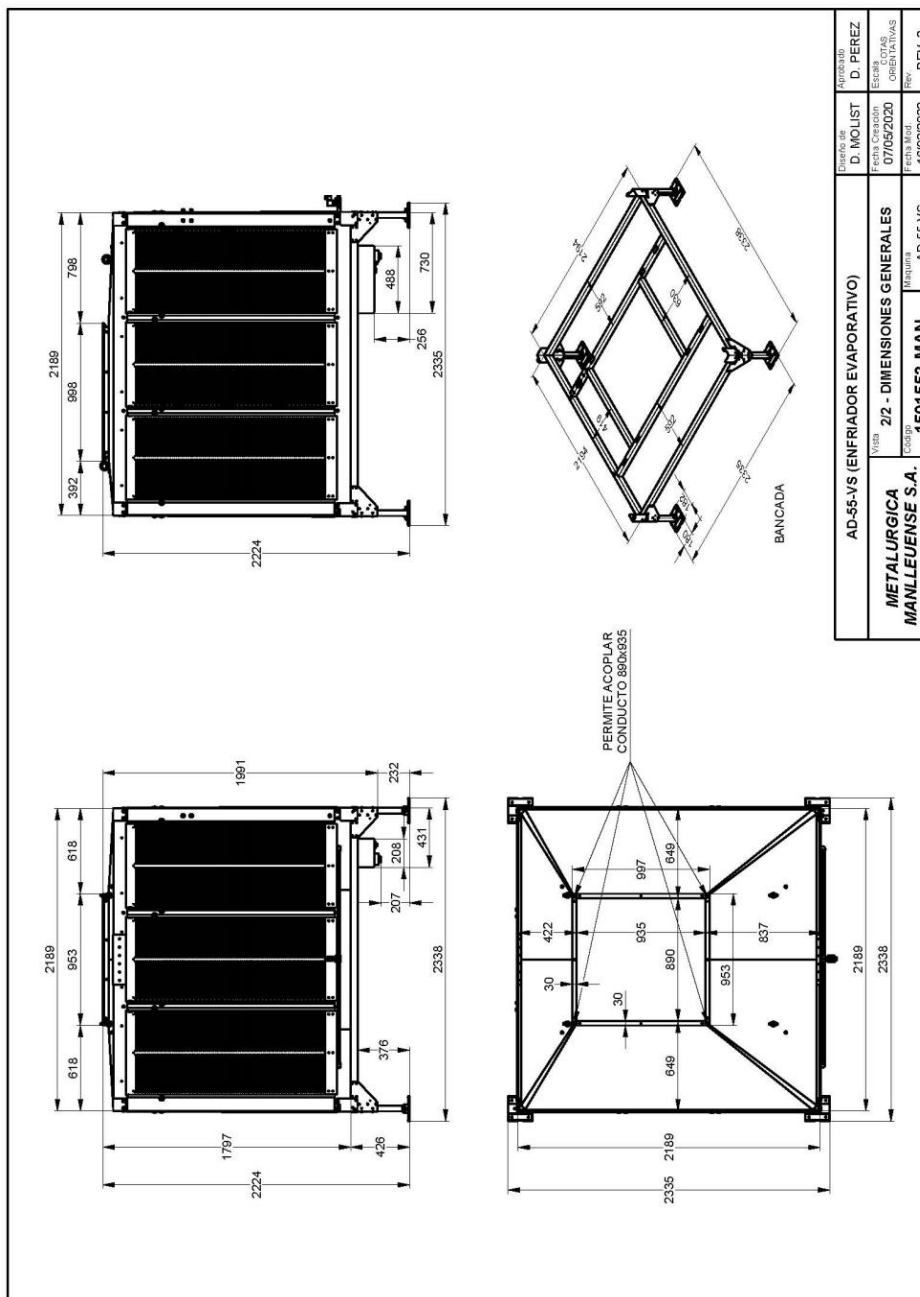

AD-55-VS (ENFRIADOR EVAPORATIVO)		APPROBADO
D. MOLLIST		D. PEREZ
Fecha de Emisión		Fecha de Emisión
07/05/2020		07/05/2020
Versión		Revisión
2/2 - DIMENSIONES GENERALES		OPERATIVAS
MANUFACTURER		Rev.
1501553-MAN		REV. 2
Modelo		
AD-55-VS		
MATERIAL		
METALURGICA MANLLEUENSE S.A.		

METALURGICA MANLLEUENSE, S.A. | Tel. +34 93 851 15 99 | www.metmann.com
C/Fontcuberta, 32-36 | 08560-Manlleu (Barcelona) SPAIN

Get In Touch

Call: 0845 6880112
Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH






AD-55-VS-100-075

Evaporative cooler with top air outlet




Surface installation with diffuser

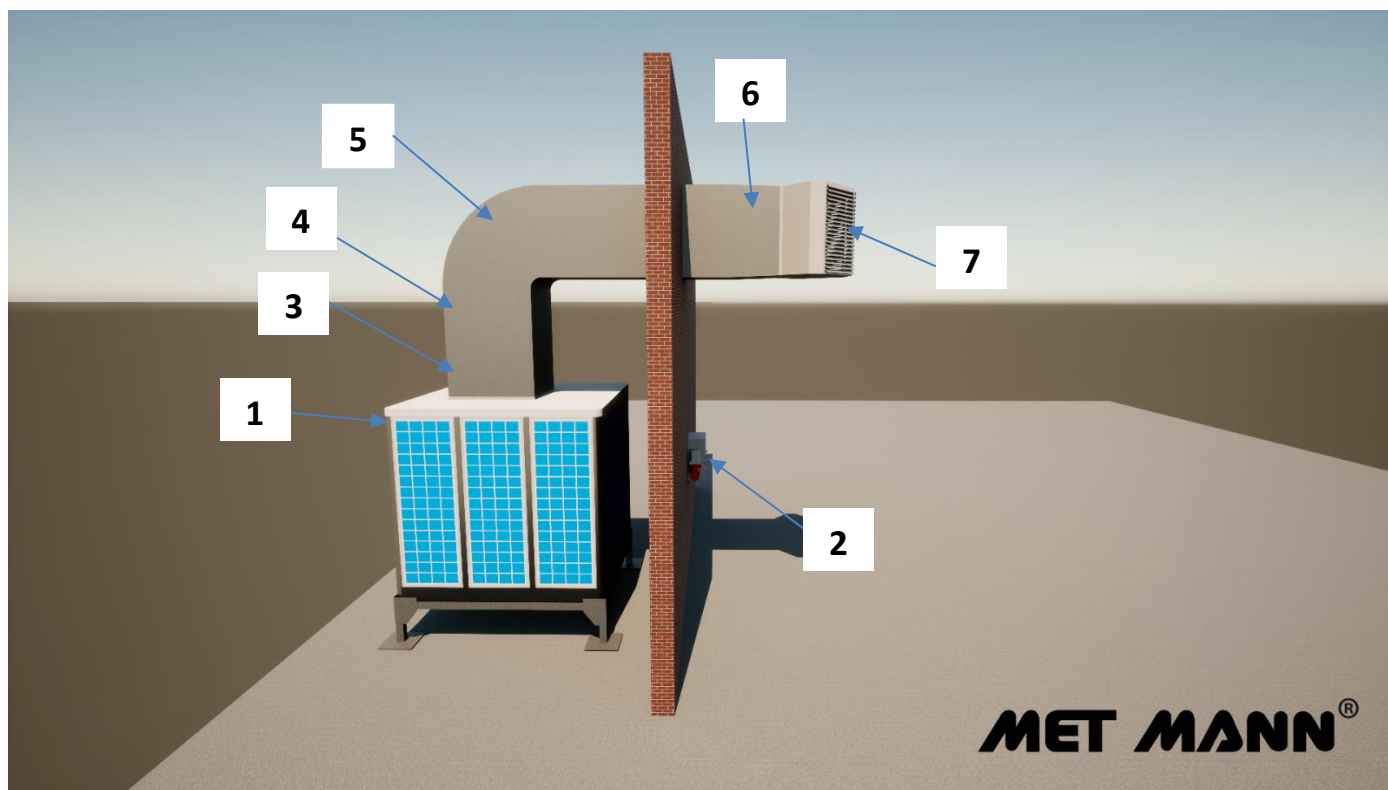

POSITION	DESCRIPTION	UNITS	STANDARD	INOX
01	Evaporative cooler AD-55-VS-100-075	1	15015531075S	15015531075I
02	Electric panel 1 speed / frequency inverter	1	0415CET075400	0415CF075400
03	Flexible joint JE-850 (935x890)	1	1805AV9389	
04	Straight section TR-850 (935x890x1000)	1	1805TR55	
05	Curved section 90° TC-850 (935x890)	1	1805TC55	
06	Coupling (935x890/900x900)	1	180590907976	
07	3-way air diffuser DCH-3-55	1	0323150155301	
-	Pre filter PG4-40	12	04150140G412	04150140G412I
-	UV WATER treatment	1	031501102020M	
-	Protective case FU-55-VS	1	030215020551W	

METALURGICA MANLLEUENSE, S.A. | Tel. +34 93 851 15 99 | www.metmann.com
C/Fontcuberta, 32-36 | 08560-Manlleu (Barcelona) SPAIN

Get In Touch

 Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address


Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

AD-55-VS-100-075

Evaporative cooler with top air outlet



Surface installation with impulsion nozzles

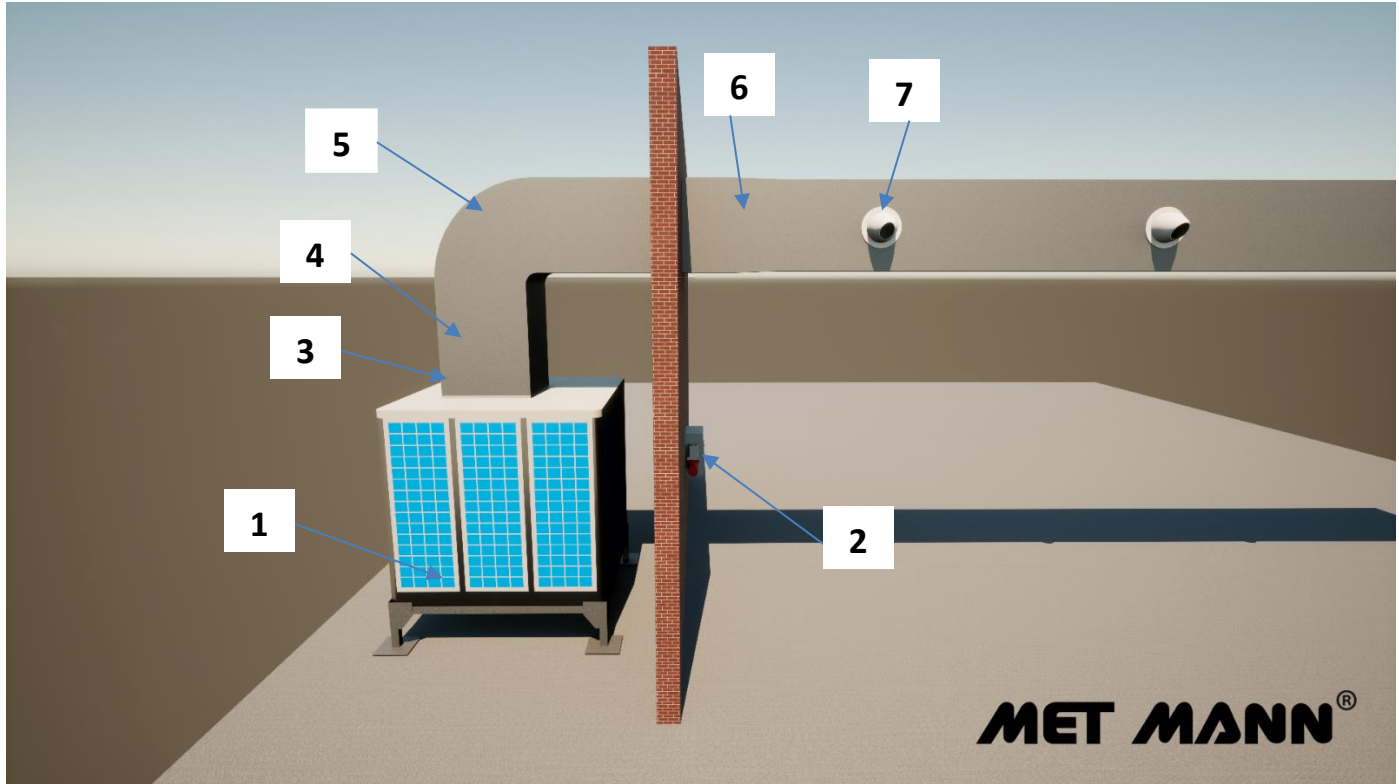

POSITION	DESCRIPTION	UNITS	STANDARD	INOX
01	Evaporative cooler AD-55-VS-100-075	1	15015531075S	15015531075I
02	Electric panel 1 speed / frequency inverter	1	0415CET075400	0415CF075400
03	Flexible joint JE-850 (935x890)	1	1805AV9389	
04	Straight section TR-850 (935x890x1000)	1	1805TR55	
05	Curved section 90° TC-850 (935x890)	1	1805TC55	
06	Coupling (935x890/900x900)	1	180590907976	
07	High induction nozzles CI-300	1	04150PAKCONO	
-	Pre filter PG4-40	12	04150140G412	04150140G412I
-	UV WATER treatment	1	031501102020M	
-	Protective case FU-55-VS	1	030215020551W	

METALURGICA MANLLEUENSE, S.A. | Tel. +34 93 851 15 99 | www.metmann.com
C/Fontcuberta, 32-36 | 08560-Manlleu (Barcelona) SPAIN

Get In Touch

Call: 0845 6880112
Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH