

DD400P



HOUR METER



HUMIDISTAT



FILTER



EVA TYRES

PHARMACEUTICAL • CONFECTIONARY • DEFENCE INDUSTRY
WATER DAMAGE • COLD STORES • POWER STATIONS • PLASTICS

Get In Touch

 Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

WHY THE NEED FOR A DEHUMIDIFIER?


Dehumidifiers are required wherever there is a need to lower the humidity level to prevent corrosion, mould growth and condensation or maintain a low humidity condition during manufacture, packaging or storing of hygroscopic products.

METHODS OF DEHUMIDIFICATION

Dehumidification is possible using two possible principles, Condensation with refrigeration style dehumidifiers and Adsorption with desiccant dehumidifiers.

Desiccant dehumidifiers perform exceptionally well when used in cooler climates, or when a low dew-point, deep drying or low humidity levels are required. Since desiccant dehumidifiers do not produce water, they will work effectively down to sub zero temperatures.

Their operation is simplistic yet extremely effective and reliable. Air (Process Air) is drawn into the dehumidifier, where it passes over a wheel impregnated with Silica Gel. As the air passes over this wheel, any moisture present in the air, is absorbed into the Silica Gel wheel before leaving the dehumidifier as warm dry air.

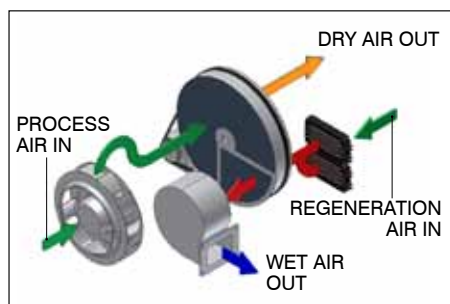

The Silica Gel wheel is continually, slowly rotating, typically at three revolutions per hour. As the wheel rotates a small portion passes through the regeneration segment. During this phase a second air stream (Regeneration Air) is heated to a high temperature before passing over the wheel. Any moisture present in the wheel is released into this air stream, this hot wet air is then exhausted outside the area being dried.

WHY CHOOSE EIPL?

EIPL is Europe's leading manufacturer of dehumidifiers and is a name you can rely on. No matter how extreme the conditions EIPL's efficiency copes comfortably even at the coldest temperatures.

RUGGED CONSTRUCTION & YEARS OF SERVICE

Over thirty seven years of development experience means you can rely on the proven track record of the EIP range of dehumidifiers. Every dehumidifier is designed for efficiency and ruggedness, and built to last. The popularity of EIP Ltd's dehumidifiers with the plant hire trade speaks for their reliability, portability and outstanding durability.

DD400P

The DD400P portable desiccant dehumidifier has a compact, rugged, lightweight design which facilitates easy transportation by one person, and is easily accommodated within space restricted areas. The unit incorporates a PTC Heater ensuring maximum drying is immediately reached, and constantly maintained while the unit is running.

The dual air inlet feature of the DD400P, is ideal for installations where the regeneration supply air, needs to be kept separate from the process supply air. An Integral electronic humidistat is fitted as standard, allowing the humidity level to be set and monitored.

The EIP range of DD desiccant dehumidifiers are all manufactured from a high grade stainless steel, ensuring a rust free product when used in the most severe of applications. The spigot connectors allow quick and easy installation.

All models incorporate a high efficiency patented PPS Rotor. This design incorporates a 82% active Silica Gel to ensure optimum performance over the equipment's wide operating range of environments. All desiccant rotors supplied by EIPL are washable, and designed for high performance / long life.

SPECIFICATIONS INCLUDES:

SPECIFICATIONS	DD400P
MODEL NO.	10640RG-GB
Height (mm)	787
Width (mm)	552
Depth (mm)	487
Weight (kg)	31
Voltage (V)	230
Current (A)	8
Phase	1
Frequency (Hz)	50
Power (kW)	2.2
Process Airflow – Dry Air (m3/hr)	334
Regen Airflow – Wet Air (m3/hr)	202
Process Duct Size – Dry Air (mm)	130
Regen Duct Size – Wet Air (mm)	100
Rotor Wheel Speed (rph)	20
Typical Extraction @ 27°C 60% - lt/day	34
Min. Operating Temperature (°C)	-20
Max. Operating Temperature (°C)	40

FEATURES INCLUDE:

SPECIFICATIONS	DD400P
MODEL NO.	10640RG-GB
On/Off Control	✓
Integral Electronic Humidistat	✓
Hours Run Meter	✓
Fitted Mains Plug	✓
Fan Speeds	1
High Capacity PTC Heater	✓
Process / Regen Air Filter	✓
Rubber Anti-Vibration Wheels	✓
Dual, Air Inlet Design	✓
Free Standing / Portable	✓
Epoxy Powder Coated	✓
Inlet Duct Attachments	○
High Temperature Safety Cut-outs	✓

APPLICATIONS:

APPLICATIONS			
Offices	✓	Laboratories	✓
Shops	✓	Medical	✓
Restaurants	✓	Food Industry	✓
Warehouses	✓	Agriculture	✓
Basements	✓	Cold Stores	✓
Factories	✓	Hospitals	✓
De-Flooding	✓	Hotels	✓
Pharmaceutical	✓	Stadiums	✓
Defence Industry	✓	Ships	✓
Confectionary	✓		