

# HIGH CAPACITY DEHUMIDIFIERS

## FLOOR STANDING



**DH 600**



### Features


- Self contained with fully automatic operation
- Integral humidistat
- Polyester coated evaporator and condenser
- Plastisol coated galvanised steel cabinet
- Reverse cycle defrost for very low temperature operation

For applications see page 56

### Options

- Top or rear fan outlet (DH 150/600 only)
- High pressure fan
- Return air filter
- Condensate pump
- Compressor soft start
- Top discharge box
- Heat recovery to water
- External condenser unit
- Remote humidistat

### Performance data

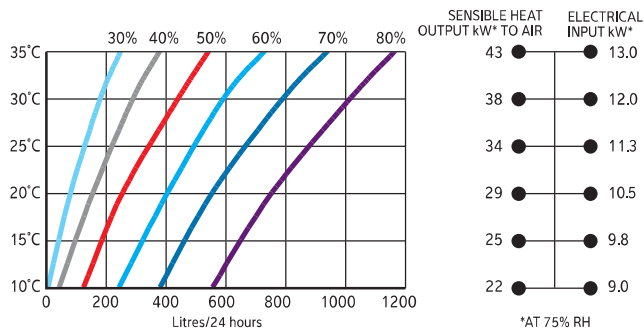

Specifications	Units	DH 600BY
Operating temperature range	°C	-15 - +35
Dehumidification @ 30°C/60% RH	l/24h	600
Heat recovered to air @ 30°C/60% RH	kW	29.7
Air flow	m <sup>3</sup> /h	9000
External static pressure	Pa	80
Sound pressure level @ 3m	dB(A)	63
Refrigerant		R407c
Power supply	V/Hz	400/3ph/50
Nominal power consumption	kW	10
FLA	A	26
Maximum supply fuse	A	35
LRA (compressor start)	A	135
LRA (compressor soft-start)	A	55
Product size (w x d x h)	mm	1730 x 1250 x 1600
Weight	kg	497
Condensate drain size (flexible plastic hose)	inch	1½ BSPM

### Get In Touch

Call: 0845 6880112  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
 Settle, North Yorkshire, BD24 9RH