

# DEHUMIDIFIERS


## WALL MOUNTED



**DH 60**



### Performance data

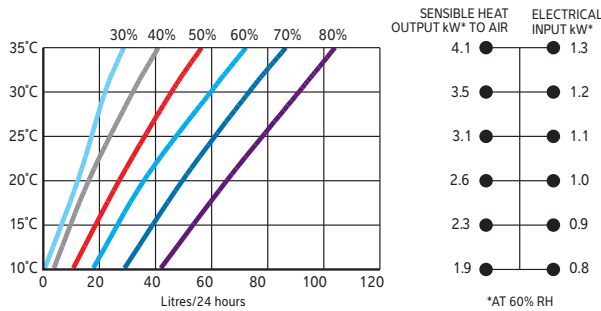

### Options

- Through the wall version
- Electric air heater
- LPHW air heater
- Remote humidistat
- Floor stand kit

### Features

- Self contained with fully automatic operation
- Integral humidistat
- Polyester coated evaporator and condenser
- Plastisol coated galvanised steel cabinet
- Hot gas defrost for low temperature operation
- Quiet centrifugal fans
- Remote humidistat and on/off function

### Applications

- Archives and museums
- Churches
- Changing rooms
- Waterworks
- Garages and car storage

Specifications	Units	DH 60AX	DH 60AXP
Operating temperature range	°C	0-35	0-35
Dehumidification @ 30°C/60% RH	l/24h	60	60
Heat recovered to air @ 30°C/60% RH	kW	3.5	3.5
Air flow	m <sup>3</sup> /h	1280	1280
External static pressure	Pa	0	0
Sound pressure level @ 3m	dB(A)	54	54
Refrigerant		R407c	R407c
Power supply	V/Hz	230/1ph/50	230/1ph/50
Dehumidifier power input	kW	1.2	1.2
FLA	A	7.5	24.2
Maximum supply fuse	A	13	32
LRA (compressor start)	A	30	30
Heater type		Optional LPHW	Standard Electric
Heat output	kW	5.0	4.0
Flow rate	l/min	5.0	-
Product size (w x d x h)	mm	1247 x 270 x 648	1247 x 270 x 648
Weight	kg	60	60
Condensate drain size (flexible plastic hose)	mm ID	16	16

### Get In Touch

Call: [01729 824108](tel:01729824108)  
 Email: [info@puravent.co.uk](mailto:info@puravent.co.uk)

### Our Address

Puravent, Adremit Limited, 6 County Business Park,  
 Darlington Road, Northallerton, DL6 2NQ