

DEHUMIDIFIERS


WALL MOUNTED



DH 30



Performance data

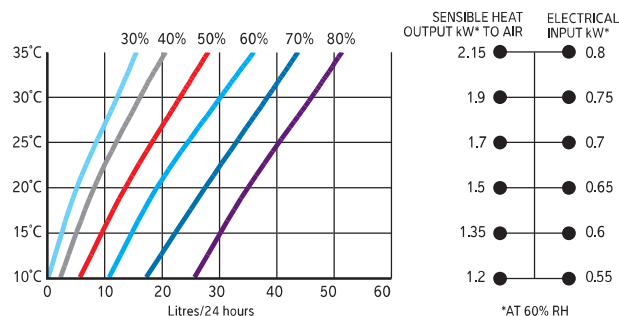

Options

- Through the wall version
- Electric air heater
- LPHW air heater
- Remote humidistat
- Floor stand kit

Features

- Self contained with fully automatic operation
- Integral humidistat
- Polyester coated evaporator and condenser
- Plastisol coated galvanised steel cabinet
- Hot gas defrost for low temperature operation
- Quiet centrifugal fans
- Remote humidistat and on/off function

Applications

- Drying rooms
- Modular buildings
- Electrical sub-stations
- Sports clubs and changing rooms
- Warehousing and storage
- Museums, libraries and galleries
- Garages



Specifications	Units	DH 30AX	DH 30AXP
Operating temperature range	°C	0-35	0-35
Dehumidification @ 30°C/60% RH	l/24h	30	30
Heat recovered to air @ 30°C/60% RH	kW	1.9	1.9
Air flow	m ³ /h	700	700
External static pressure	Pa	0	0
Sound pressure level @ 3m	dB(A)	52	52
Refrigerant		R407c	R407c
Power supply	V/Hz	230/1ph/50	230/1ph/50
Dehumidifier power input	kW	0.75	0.75
FLA	A	4.4	12.7
Maximum supply fuse	A	10	20
LRA (compressor start)	A	15.8	15.8
Heater type		Optional LPHW	Standard Electric
Heat output	kW	3.0	2.0
Flow rate	l/min	5.0	-
Product size (w x d x h)	mm	782 x 270 x 648	782 x 270 x 648
Weight	kg	40	40
Condensate drain size (flexible plastic hose)	mm ID	16	16

Get In Touch

Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH