




# INDUSTRIAL DRYING ADSORPTION



**DT 4500**  
**DT 5800**

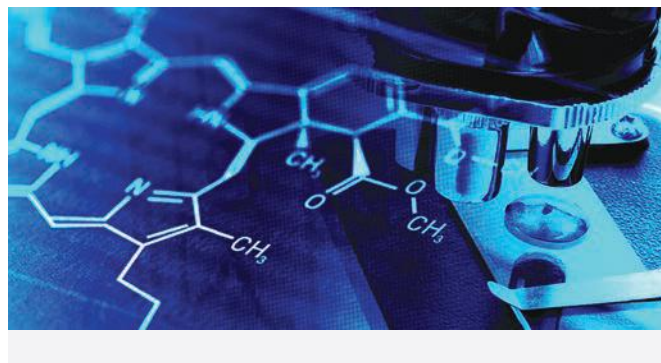

## Features

- Insulated housing in stainless steel
- Controls including, humidity sensor operation, alarm system, and different options for dry air fan operation
- Reactivation heater type according to customer specifications

## Optional accessories

- Air cooled condenser
- DDC controls

## Applications



- Process air systems
- Store rooms
- Pharmaceutical production
- Pumping stations
- Film production
- Electronics manufacturing
- Confectionery and food production
- Museums and art galleries
- Cold storage

Specifications	Units	DT 4500	DT 5800
Dehumidification @ 20°C/60% RH	kg/h	24.6	29.3
Dry air flow	m <sup>3</sup> /h	4500	5800
Available pressure	Pa	800	420
Wet air flow	m <sup>3</sup> /h	1300	1300
Available pressure	Pa	180	240
Power consumption	kW	40.8	44.8
Power supply	V/Hz	400/3ph/50	400/3ph/50
Sound level	dB(A)	72	72
Reactivation power	kW	36.0	40.0
Electrical (E), steam (S), gas (G) react. option		E/S/G	E/S/G
Filter class		4	4
Product size (l x w x h)	mm	1800 x 1160 x 1221	1800 x 1160 x 1221
Weight	kg	410	410

## Get In Touch

- Call: [0845 6880112](tel:08456880112)  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

## Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH