
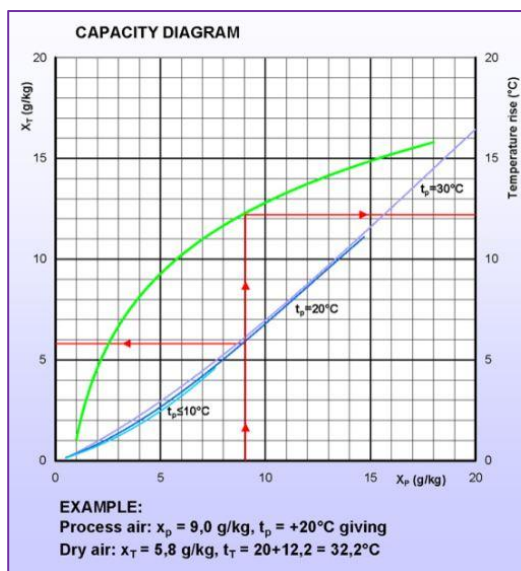


DehuTech™ 160 Desiccant Dehumidifier

DehuTech™ desiccant (adsorption) dehumidifiers are developed, designed and produced to meet the highest demands for high capacity, low energy consumption, reliability and simple maintenance.

All desiccant dehumidifiers are fitted with a high performance adsorption rotor that is washable, incombustible, chemically inert and mechanically stable.

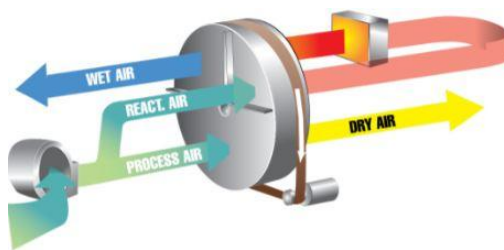

DehuTech™ 160 desiccant dehumidifier is a self-contained unit with fan, filter, rotor and controls, ready for connection to standard-size duct works and electrical mains (230V 50 Hz).

Features

- Sturdy housing in stainless steel.
- Low weight.
- PTC (Positive Temperature Control) Reactivation heater, eliminates the risk of overheating and allows stepless capacity control.
- The desiccant rotor, including the transmission element and fan, can be easily be lifted out of the housing for external inspection and service

Accessories for DehuTech™ 160

- External humidistat connection.
- Floor stand.
- Wall bracket.

| TECHNICAL DATA DT 160 | |
|--|-----------------------|
| Dehumidification capacity (+20°C, 60%RH) | 0.6 kg/h |
| Dry air flow (free blowing) | 160 m ³ /h |
| Wet air flow | 40 m ³ /h |
| Power supply (230 V, 50 Hz) | 1.0 kW |
| Weight | 10.5 kg |
| Max noise level | 53 dB(A) |
| Dimensions (lxwxh) | 324 x 329 x 274 mm |
| Reactivation power | 0.8 kW |
| Electrical (E), steam (S), gas (G) react. option | E |
| Filter class | 3 |

Get In Touch

Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH