



## DehuTech™ 27000 Desiccant Dehumidifier

DehuTech™ desiccant (adsorption) dehumidifiers are developed, designed and produced to meet the highest demands for high capacity, low energy consumption, reliability and simple maintenance.

All desiccant dehumidifiers are fitted with a high performance adsorption rotor that is washable, incombustible, chemically inert and mechanically stable.





DehuTech™ 27000 desiccant dehumidifier is delivered as a complete units with fans, filters, rotor and controls. The dehumidifier is ready for site installation, connection to standard-size ducting and electrical mains (3 x 400V 50 Hz ) and external sensors.

### Features

- Insulated housing with panels and inspection doors.
- Possible to transport by forklift.
- Internal purge zone reducing energy consumption and increasing the capacity.
- Control system.

TECHNICAL DATA DT 27000	
Dehumidification capacity (+20°C, 60%RH)	182 kg/h
Dry air flow (at 400 Pa available external pressure)	27900 m³/h
Wet air flow (at 250 Pa available external pressure)	6980 m³/h
Power supply (3x400 V, 50 Hz)	309 kW
Weight	2400 kg
Max noise level	~ dB(A)
Dimensions (l x w x h)	2900 x 2400 x 2500 mm
Reactivation power	288.0 kW
Electrical (E), steam (S), gas (G) react. option	E/S/G
Filter class	4

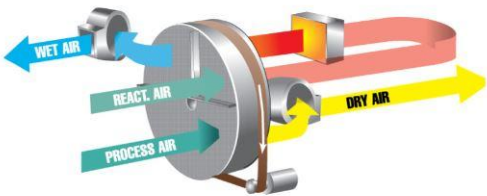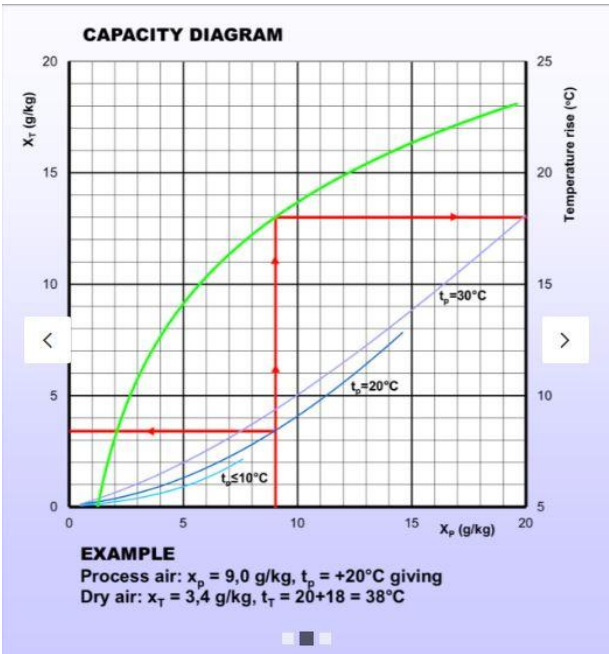

### Get In Touch

Call: [0845 6880112](tel:08456880112)  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH