



SPRAYDOWN

QUICKFLOW CLASS A1 VANE SEPARATOR



PRODUCT INFORMATION

PERFORMANCE

- CLASS A1 SEPARATOR
- INGRESS PROTECTION: IP65* AND IPX5
- >99.9% SEPARATION EFFICIENCY
- TESTED TO BS EN 13030:200
- TEMP RANGE -30°C TO +60°C
- INDEPENDENTLY TESTED BY BSRIA & GRT

APPLICATIONS

- ENGINE INTAKES
- HEVAC EQUIPMENT
- COOLING COILS
- MARINE & OFFSHORE
- CONTAINERS


FEATURES

- HIGH WATER CAPTURE
- VERY LOW PRESSURE DROP (BELOW)
- COST EFFECTIVE DESIGN
- CORROSION RESISTANT
- BESPOKE SIZING
- EXTERNAL GRADE PVC

LAYOUT

- BLADES : 1.5MM
- DEPTH : 125MM
- MATL: EXTERIOR GRADE PVC

PRESSURE DROP CURVE

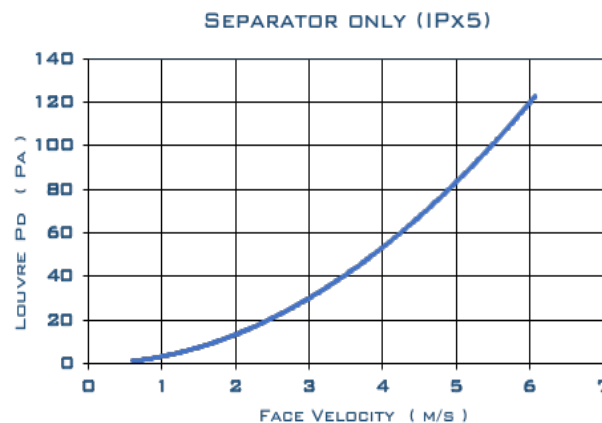

SPRAYDOWN SOLUTIONS LTD
PO Box 249
WIDNES, WAB 2BP

WEB: WWW.SPRAYDOWN.COM

TEL: +44 (0) 1786 445255
FAX: +44 (0) 1786 201200
EMAIL: SALES@SPRAYDOWN.COM

Get In Touch

- Call: 0845 6880112
- Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH