



REV-3POL ATEX 11KW-25A ON/OFF

Item no. 36414

Document type: **Product card**
 Document date: **2018-06-29**
 Generated by: **Systemair Online Catalogue**

Description

Explosion proof Safety switch REV

- 25A, 3pole 1 x NC and 1 x NO
- Polyester resin (RAL 7024)
- Padlockable in the "Off" position (3x)
- Sealing to IP66

Safety switches ensure the obligatory isolation of electrical power during cleaning, maintenance and repair of the equipment.

With tapped hole 2xM25, 1xM20.

Suitable cable glands are available as accessories.



Technical parameters

Classification	
Product type	Switch
Nominal data	
Switching capacity	AC-3 / AC-23
Dimension	
Height	1316 mm
Width	170 mm
Depth	170 mm
Weight	2,4 kg
Default group	
Voltage	400 V
Max. current	25 A
Max. load	11 (AC3/AC23) kW
Contact	3pol +1NO+1NC
wire cross section	4,0 ... 6,0mm ²
Temperature range	-20-40 °C
Enclosure class	IP66
Explosion proof	II 2G Ex de IIC T6

Get In Touch


Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH



Dimensions

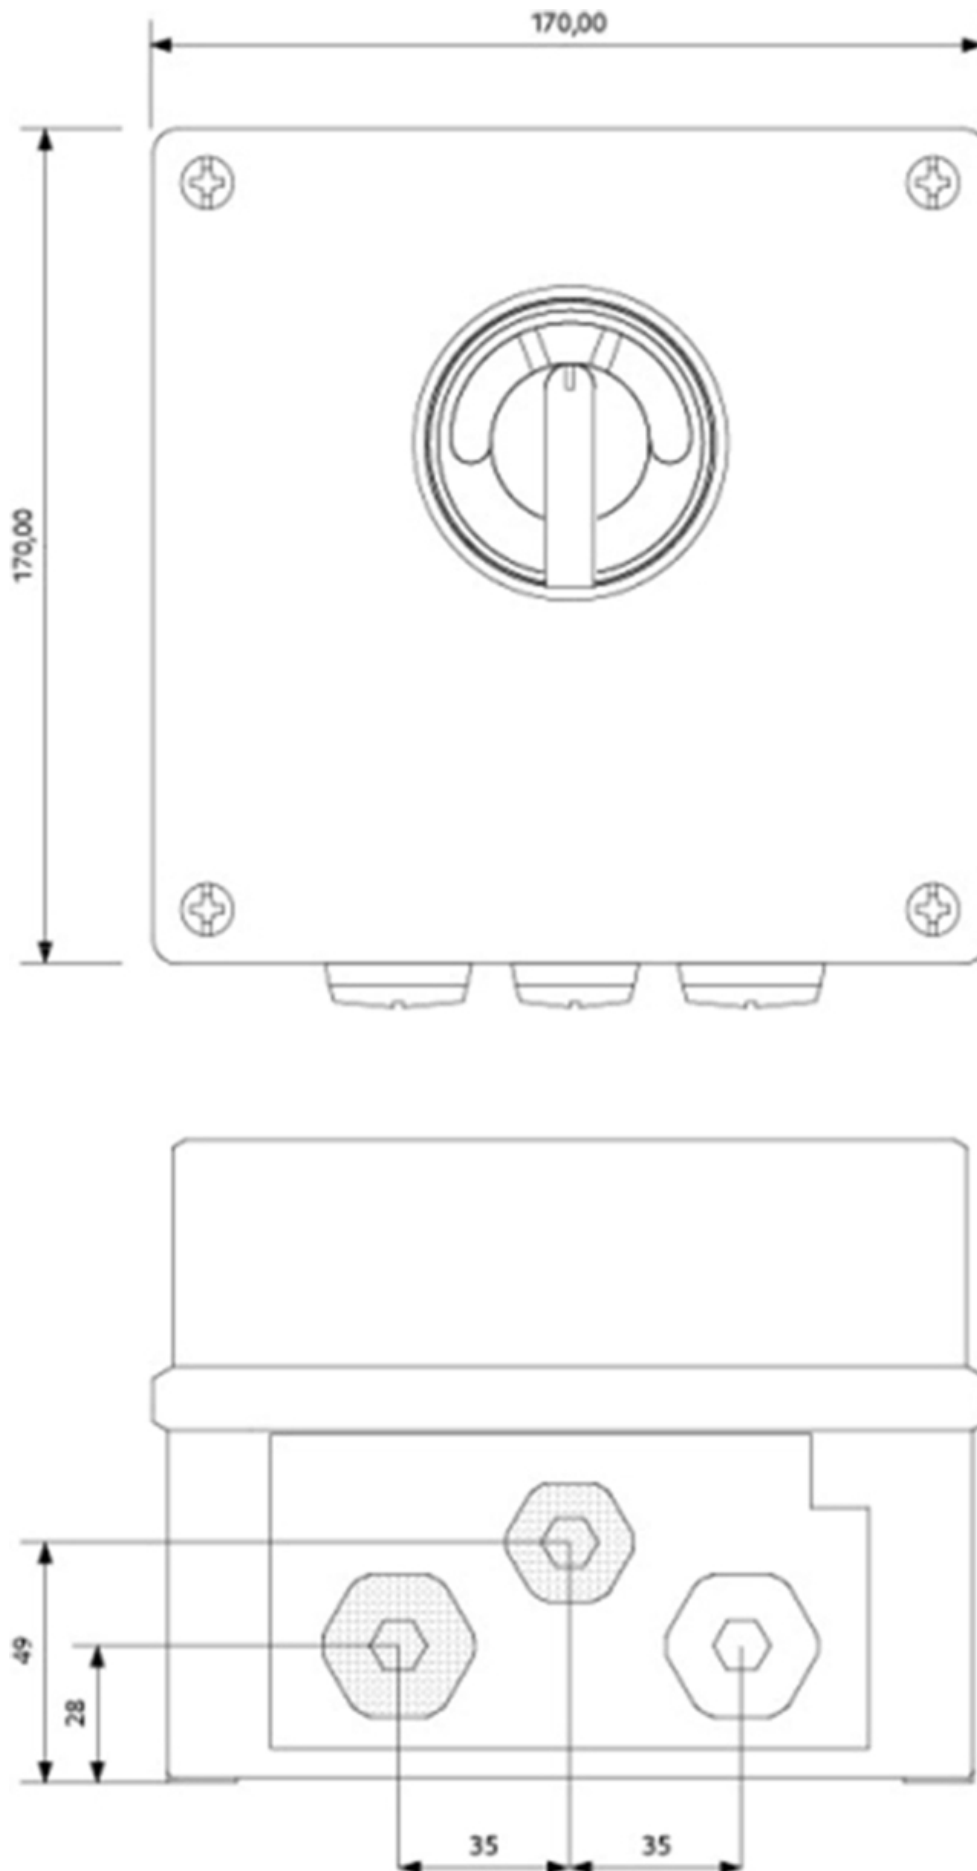

Name: **REV-3POL ATEX 11KW-25A ON/OFF** | Item no.: **36414**

2 / 3

Document type: **Product card** | Document date: **2018-06-29** | Generated by: **Online catalogue**

Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: info@adremit.co.uk


Our Address


Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH


height: 173 mm

Accessories

Documentation


 BA_OI_de_en.pdf (344,34kB)

 Systemair_ptb01atex1024_en.pdf (339,23kB)



 Systemair_iecex_ptb06_0090_en.pdf (65,71kB)

Wiring

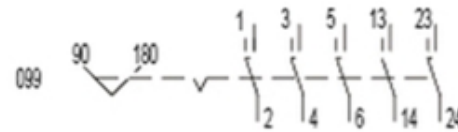	1	3	5	13	23
90°					
180°	X	X	X	X	X
	2	4	6	14	24



Get In Touch

 Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH