



SAVE VSR 300

Item no. 88350

Version: Filter F7/ePM2,5 70% - G3/Coarse 50%; Filter(s) included with the unit

Document type: **Product card**


Document date: **2019-06-24**

Generated by: **Systemair Online Catalogue**



Description

- High efficiency rotary heat exchanger with EC- variable speed rotor motor
- Energy efficient RadiCal-fans, with EC-technology enables very low SFP and low sound
- Moisture transfer function to minimize condensation to supply air in wintertime is available
- Demand control regulation as standard by the built-in humidity sensor in extract air
- SAVE Touch control with a capacitive color touch screen for easy use and commissioning
- Connection box outside of unit for easy installation
- Modbus communication via RS-485 as standard
- Internet communication over the Systemair cloud (IAM) is available as accessory
- Inspection hatch on both sides

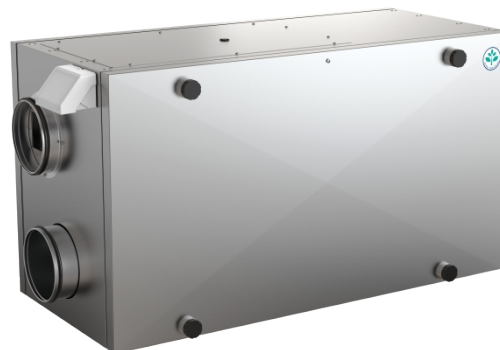

Heat recovery unit designed for ventilated areas up to approximately 240 m². SAVE VSR 300 is a double skinned, fully insulated unit with complete control functions. The unit is equipped with a high efficiency variable speed rotating heat exchanger and a moisture transfer function that regulates the rotation speed of the rotor due temperature and moisture transfer back to supply air. Energy efficient fans with EC motors as well as low pressure filters reduces the energy consumptions and gives low SFP factor (Specific Fan Power) and low sound. The built in humidity sensor in extract air can be used for demand control.

All settings and features are available from the SAVE Touch control panel that connects to the side of the unit via the connection board and can be positioned on the wall or on the unit. The panel is a color touch screen with a user friendly interface. The option for connecting one or more external control panels is available. Also control panel has separate user level for authorized installers and service personnel.

The homepage of the control panel shows information such as airflow, temperature, air quality and active functions. You can select between MANUAL and AUTO mode or choose preferred settings from the pre-configured user modes.

SAVE Touch AUTO mode has many functions available that regulate the airflow according to CO₂, presence, humidity, schedule etc. The demand function control gives effective and economical operation to ensure best indoor air quality. Alarm symbols will indicate possible malfunctions and issues direct alerts if anything needs to be rectified.

The unit comes with built-in electric reheater.

The unit is provided with a connection board that has prewired inputs and outputs for easy installation and setup of external sensors as well as for external heaters / coolers.

The unit can be installed in upright position on the floor or horizontally on the ceiling.

A Ceiling mounting kit is available as an accessory.

The unit is delivered with low pressure bag filters:

- Supply air filter F7/ePM2.5 70%
- Extract air filter G3/Coarse 50%

Low pressure bag filter G3/Coarse 60% is available as an accessory for supply air filtering.

Passive House Institute (PHI) approved filter set (F7/ePM1 60% - M5/ePM10 50%) which is required for Passive House function is available as an accessory.

Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

Technical parameters

Unit	
Voltage	230 V
Frequency	50 Hz
Phase	1 ~
Weight	65 kg
Recommended fuse	10 A
Enclosure class	IP24
Color casing	Galvanized steel
Heat exchanger	
Rotor drive	Variable speed
Exchanger type	Rotating heat exchanger
Heater	
Input power, electrical heating battery	1,67 kW
Heating type	Electric
Supply fan	
Input power (P1)	83 W
Extract fan	
Input power (P1)	83 W
Supply filter	
Filter, supply air	ePM2,5 70%
Extract filter	
Filter, extract air	Coarse 50%
Others	
Mounting type	Horizontal units
Supply side	Right
ErP	
Energy class, basic unit	A
Energy class, basic unit option	A
ErP ready	ErP 2016/ErP 2018

Get In Touch


 **Call:** [0845 6880112](tel:08456880112)
 **Email:** info@adremit.co.uk

Our Address


Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

Energy class label

Energy class, basic unit

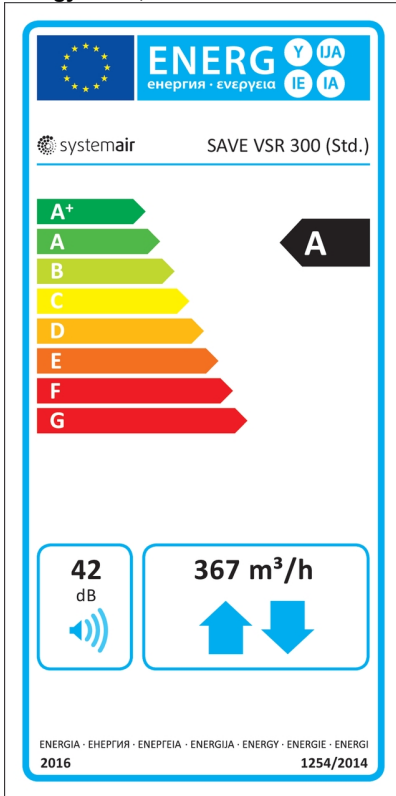

Unit with local demand control

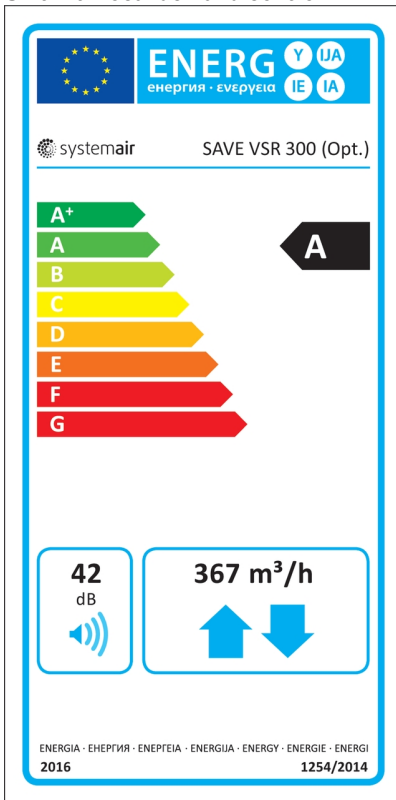

Name: **SAVE VSR 300** | Item no.: **88350** | Version: **Filter F7/ePM2,5 70% - G3/Coarse 50%; Filter(s) included with the unit**

3 / 5

Document type: **Product card** | Document date: **2019-06-24** | Generated by: **Online catalogue**

Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: info@adremit.co.uk


Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH


Diagrams

Diagrams

Diagrams and calculations are made for the performance with clean filters.

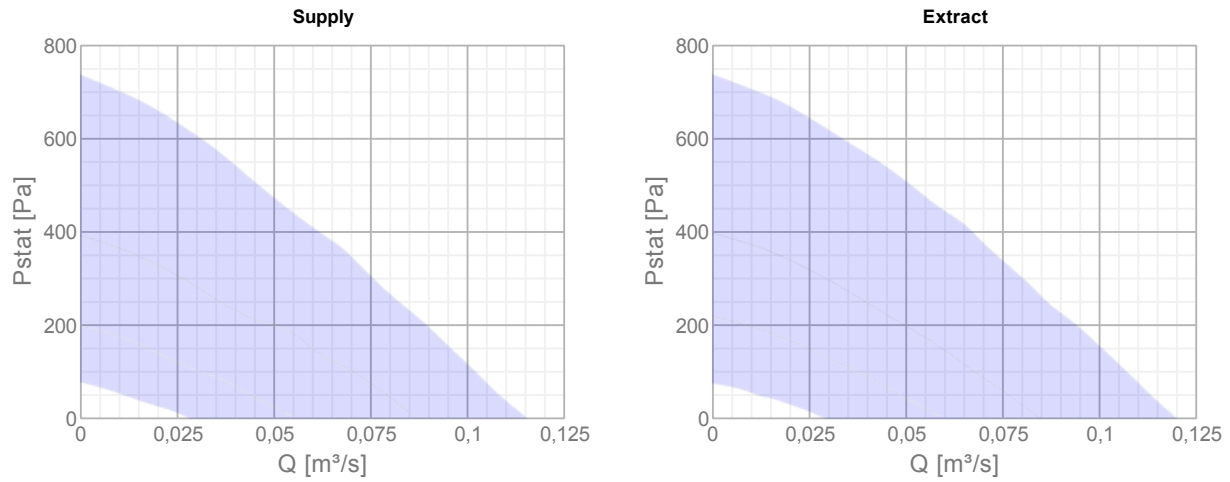

Dimensions

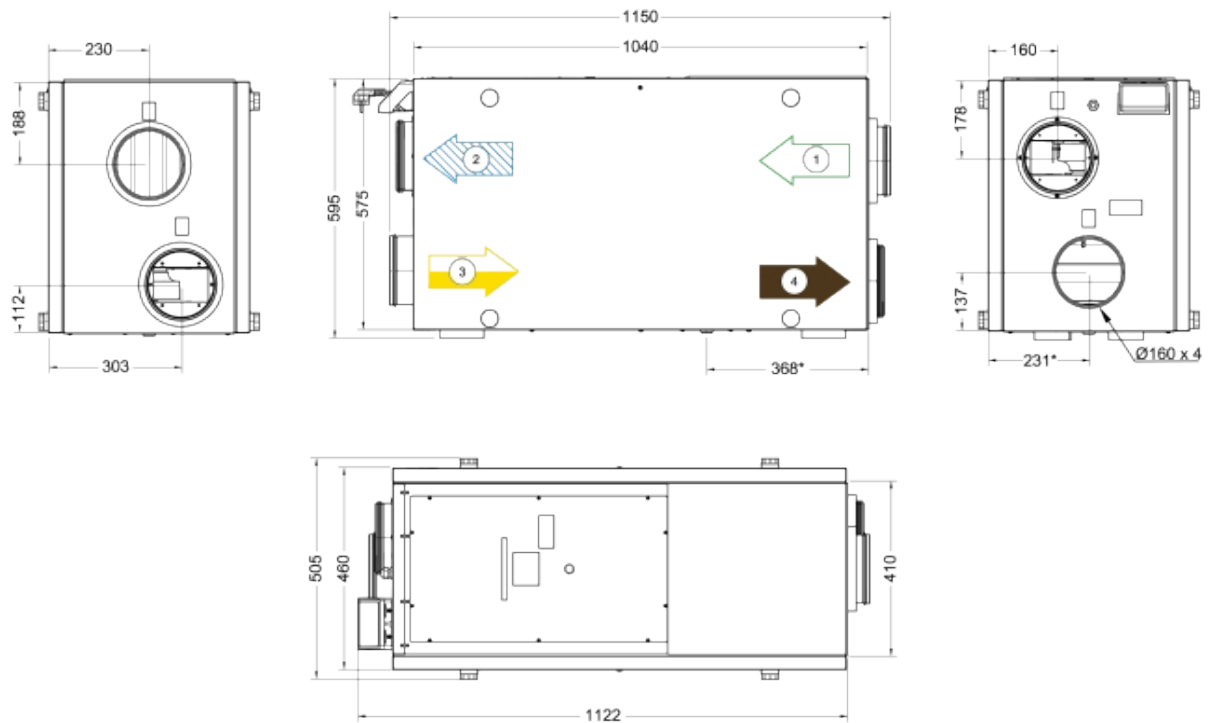

* Drainage

- 1 Outdoor air
- 2 Supply air
- 3 Extract air
- 4 Exhaust air

Get In Touch

 Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

Accessories





Electric accessories

[CB 160-1,2 230V/1 Duct heater \(5291\)](#)
[Presence detector/IR24-P \(6995\)](#)
[PSS48 Transformer 24V \(204385\)](#)
[RVAZ4 24A Actuator 0-10V \(9862\)](#)
[Push button, impulse \(9693\)](#)
[Systemair-E CO2 sensor \(14904\)](#)
[Systemair-1 CO2 duct sensor \(14906\)](#)
[CEC Cable w/plug 6m \(24783\)](#)
[CEC Cable w/plug 12m \(24782\)](#)
[TUNE-R-160-3-M4 \(311969\)](#)
[SAVE Touch White SPR \(138077\)](#)
[SAVE Touch Black SPR \(138078\)](#)
[Internet access module \(IAM\) \(211243\)](#)



Accessories

[CWK 160-3-2,5 Duct cooler,circ \(30022\)](#)
[VBC 160-2 Water heating batt \(5458\)](#)
[LDC 160-600 Silencer \(5192\)](#)
[LDC 160-900 Silencer \(5193\)](#)
[FK 160 Fast clamp \(1610\)](#)
[ZTV 15-0,4 2-way valve \(9829\)](#)
[VBC 160-3 Water heating batt \(9840\)](#)
[ZTR 15-0,4 valve 3-way \(9670\)](#)
[Connectduct Ø 160/1,0 M/F \(2558\)](#)
[ZTR 15-0,6 valve 3-way \(6573\)](#)
[ZTV 15-0,6 2-way valve \(6571\)](#)
[BF VSR 300 G3/Coarse 60% Sup \(208103\)](#)
[Ceiling mounting kit VSR 300 \(131610\)](#)
[CVVX 160 Combi grille, black \(25394\)](#)
[CVVX 160 Combi grille, white \(25396\)](#)
[SAVE Touch Wall Mounted Kit \(140736\)](#)
[BF VSR 300 PH kit \(211585\)](#)

Documentation

-  [211578 Control panel mounting instr A003.pdf \(378,62kB\)](#)
-  [211558 SAVE_VSR_300-500_User_manual_EN_SE_DE_FI_20190415_sw1.8.0.pdf \(6,05MB\)](#)
-  [211557 SAVE_VSR_300-500_Installation_and_service_EN_SE_DE_FI_20190415_sw1.8.0.pdf \(7,75MB\)](#)
-  [211577 Energy label placement SAVE A002.pdf \(714,54kB\)](#)
-  [SAVE Modbus Variable List 20190116 \(Rev. 29\).pdf \(1,19MB\)](#)
-  [Systemair_SAVE_VSR_300_disassembly_EN_SE_DE_NO_FI_20181207.pdf \(375,92kB\)](#)
-
-  [211460 VSR_150_300_500_Wiring_diagram_EN \(A001\).pdf \(607,10kB\)](#)
-
-  [Eurovent Certification Diploma 20180928.pdf \(1,78MB\)](#)
-  [SAVE VSR 300 Passive House Certificate 2019.pdf \(168,46kB\)](#)
-
-  [Systemair_SAVE_Commissioning_record_EN_20190109.pdf \(1,13MB\)](#)
-
-  [88350_SAVE_VSR300.dxf \(2,06MB\)](#)
-
-  [SAVE Touch_quick_guide_20181211.pdf \(568,48kB\)](#)
-
-  [VSR 300_500_Scheme_EN \(A001\).pdf \(480,39kB\)](#)

Get In Touch

 **Call:** [0845 6880112](tel:08456880112)
 **Email:** info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH