



SSD 355/400 ZM SOCKET SIL

Item no. 95061

Document type: **Product card**
 Document date: **2019-06-20**
 Generated by: **Systemair Online Catalogue**


Description

Socket silencer for flat roof fulfilling sound requirements at the inlet side. The sound absorption at 250 Hz is in average 8 dB. Manufactured from corrosion resistant coated steel sheet (magnelis). The sound absorbing material is abrasion resistant up to a velocity of 20 m/s. The baffles are extendable for service options. Suitable for daily ventilation.



Dimensions

	C	D	E	F	G	M1	M2	I	P	H	kg
SSD 190/225 ZM	258	245	297	571	258	M6	M6	114	272	400	7
SSD 310/311 ZM	345	330	398	710	345	M6	M6	152	366	500	10
SSD 315 M/L TFSK ZM	434	450	478	797	434	M10	M8	179	449	650	16
SSD 355/400 ZM	468	450	562	874	472	M10	M8	214	526	650	24
SSD 450/500 ZM	534	535	628	900	538	M10	M8	241	596	650	27

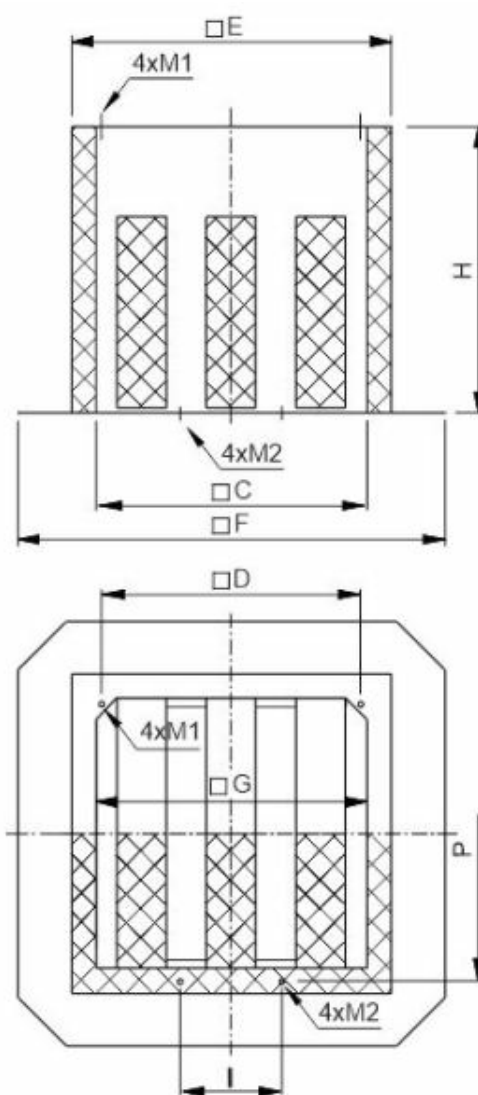

Get In Touch


Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address


Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH

Diagram

Pressure drop diagram

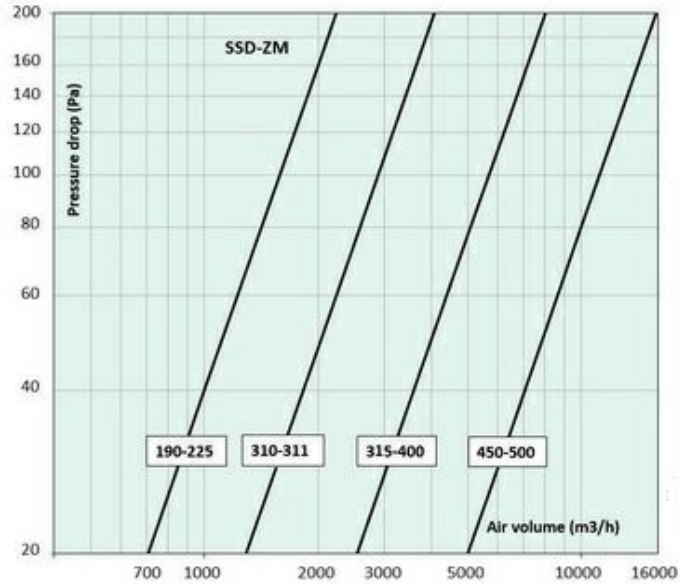

Attenuation

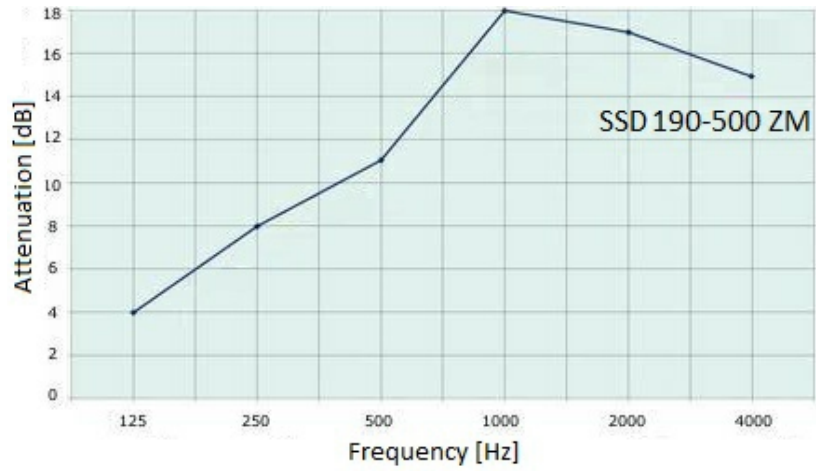



Name: **SSD 355/400 ZM SOCKET SIL** | Item no.: **95061**

2 / 2

Document type: **Product card** | Document date: **2019-06-20** | Generated by: **Online catalogue**

Get In Touch

 Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH