



# SSD 450-500 SOCKET SILENCER

Item no. 9563

Document type: **Product card**  
 Document date: **2019-06-20**  
 Generated by: **Systemair Online Catalogue**

## Description

Socket silencer for special requirements at the inlet side. The sound absorption at 250 Hz is in average 8 dB. The SSD is manufactured from seawater resistant aluminium. The sound absorbing material is abrasion resistant up to a velocity of 20 m/s. The crank is extendable for service options.


Suitable for DVS/DHS, DVSI, DVN, DVNI, DVC, TFSK and DVEX.



## Dimensions

	D	E	F	H	nut M1	nut M2	I	h7	weight(kg)
SSD 190/225*	245	297	571	258	M6	M6	114	400	5
SSD 310/311**	330	398	710	345	M6	M6	152	500	8
SSD 315M/L***	450	478	797	434	M10	M8	179	650	13
SSD 355/400	450	562	874	472	M10	M8	214	650	17
SSD 450/499/500	535	628	900	538	M10	M8	241	650	19
SSD 560/630	750	898	1200	808	M10	M8	471	700	31
SSD 710	840	985	1300	898	M10	M8	508	800	41
SSD 800/900	1050	1212	1540	1118	M12	-	-	1000	65

- \* also suitable for TFSK 125 M/L
- \*\* also suitable for TFSK 160 and 200
- \*\*\* only suitable for TFSK 315 M/L

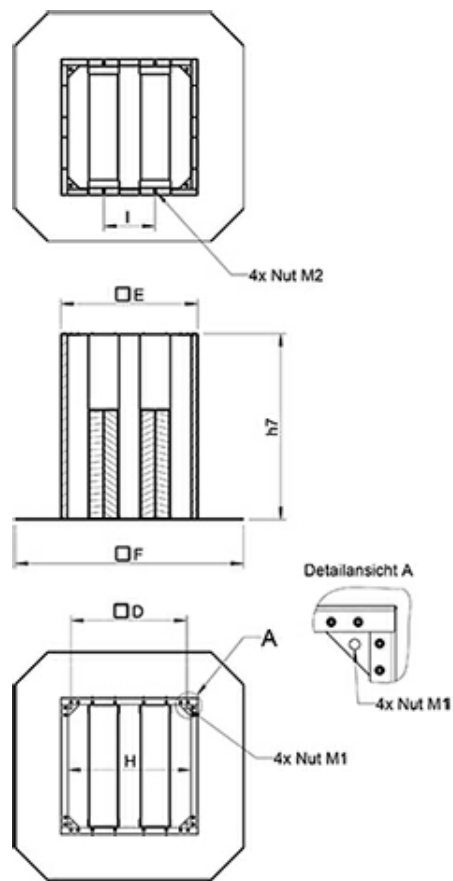

### Get In Touch

Call: [0845 6880112](tel:08456880112)  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)


### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
 Settle, North Yorkshire, BD24 9RH



## Diagram

SSD 190/225	1
SSD 310/311	2
SSD 315 TFSK	3
SSD 355/400	3
SSD 450/499/500	4
SSD 560/630	5
SSD 710	6
SSD 800/900	7

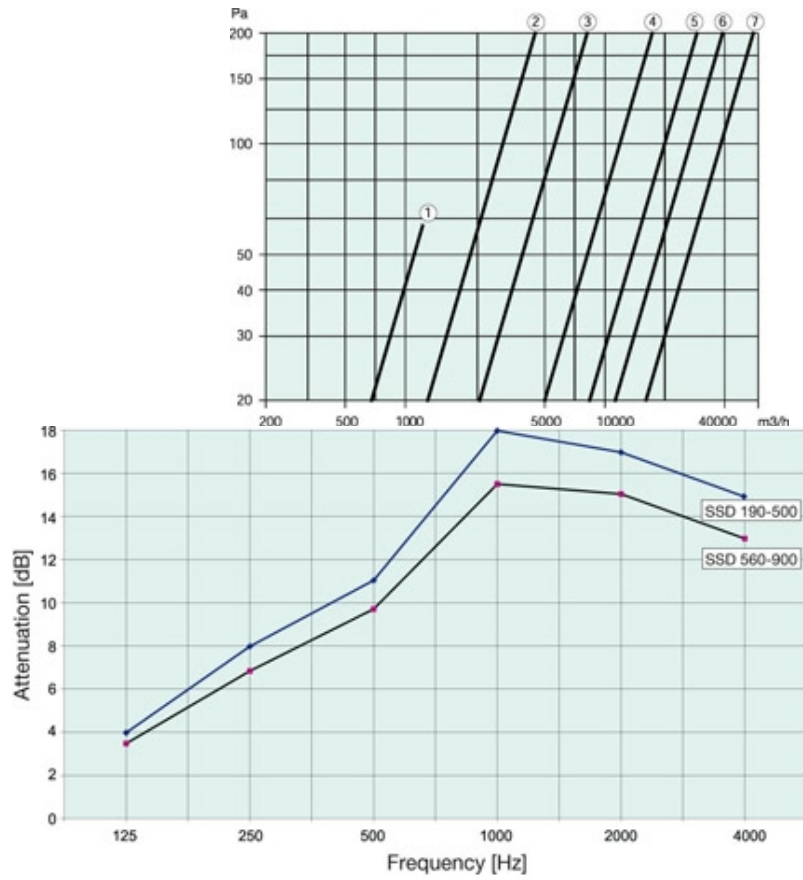

Name: **SSD 450-500 SOCKET SILENCER** | Item no.: **9563**

2 / 2

Document type: **Product card** | Document date: **2019-06-20** | Generated by: **Online catalogue**

### Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH