




SSGE/F 315-355 SOCKET SILENCER

Item no. 95087

Document type: Product card
Document date: 2019-06-20
Generated by: Systemair Online Catalogue

Description


Socket silencer for DVG and DVV-XS...XP/F400 and F600
The socket silencers SSGE/F are suitable for pitched roof constructions up to a max. angle of 30° at size 315-630 and max. 20° at size 800 (specified angle above 20° upon inquiry). The angle of supports and height above roof can be adjusted on the socket - 3 positions H1-H3 to fasten and rotate the supports. At size 800 this is limited. Casing is manufactured from aluzinc/magnelis steel sheet, sides filled with insulation of mineral wool with a textile lining. Insulation is secured with an additional metallic guard. Suitable for up to 600°C/2h. The surface of insulation is abrasion resistant. Supplied with a sealing between the socket and the fan.

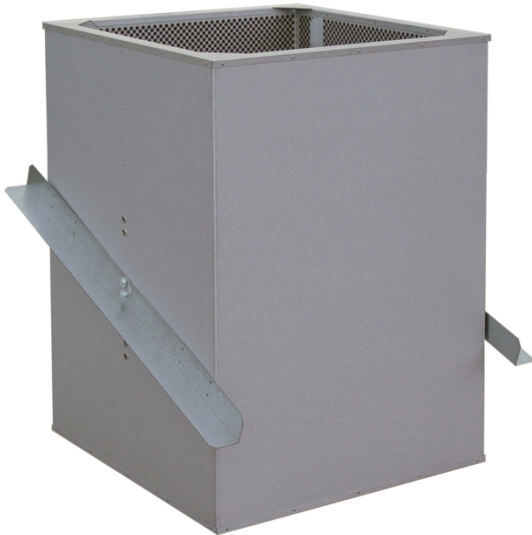

Technical parameters

| Other | |
|--------|-------|
| Weight | 50 kg |

Dimensions

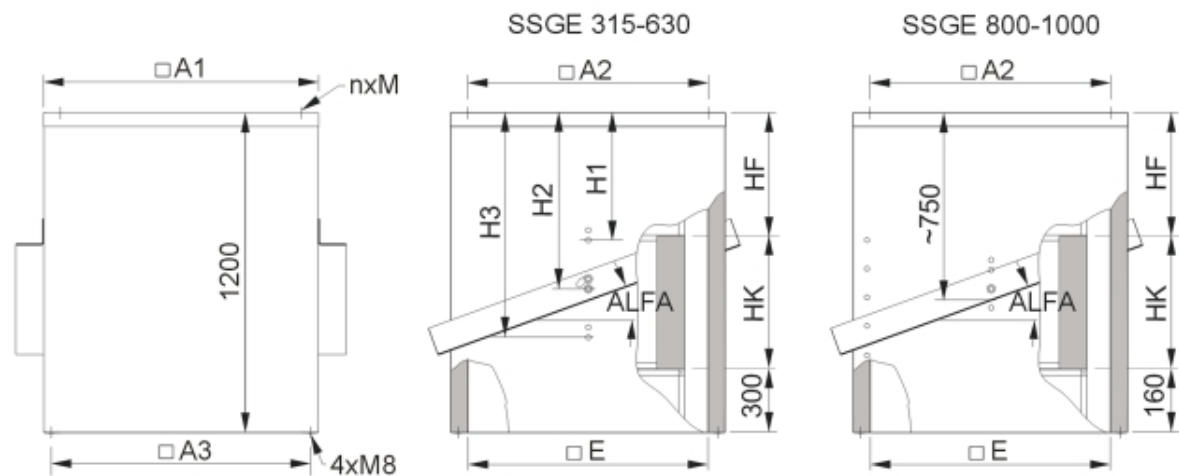

Accessories

Documentation

IMO_FDGE_SSGE_26_05_2016.pdf (1,58MB)

SSGE_F_315_355_00.dxf (1,59MB)


Get In Touch

Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

Diagram

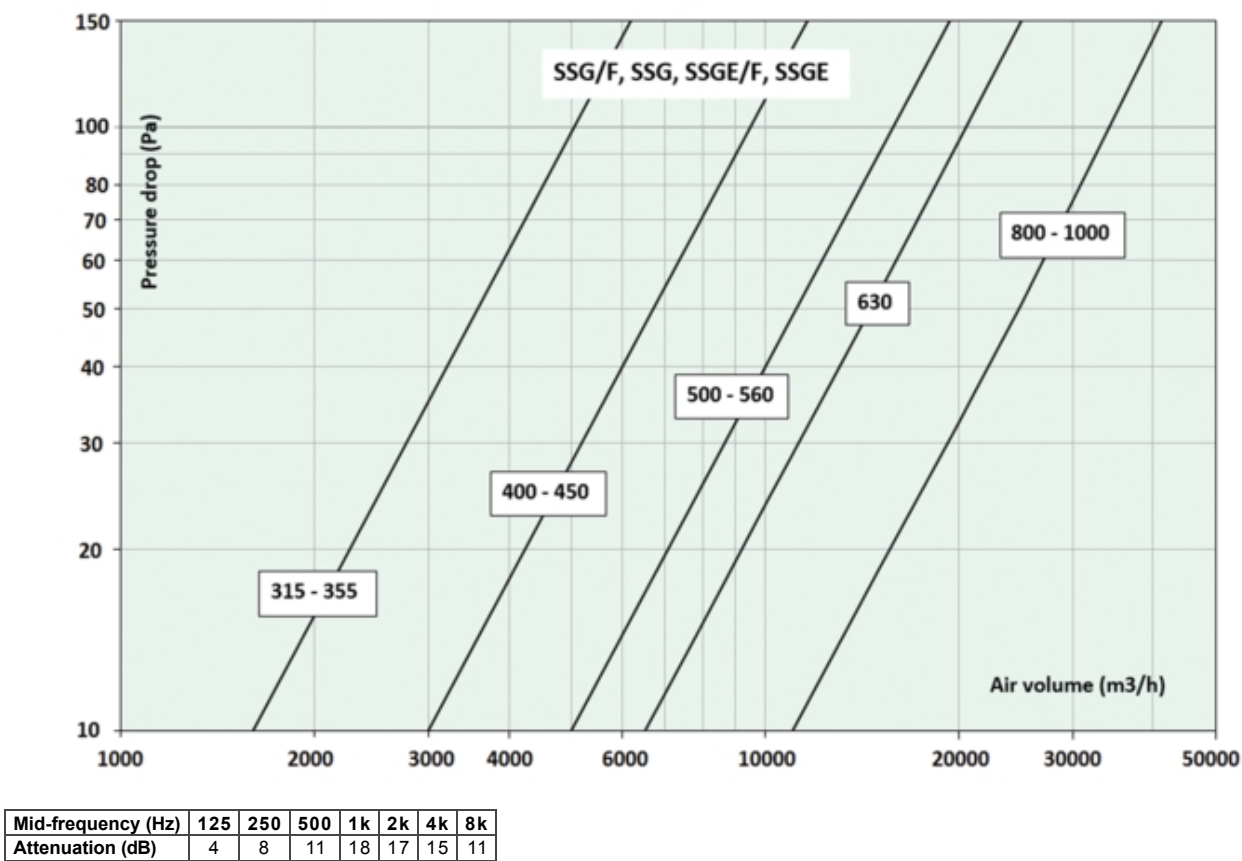

Get In Touch

Call: [0845 6880112](tel:08456880112)
Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

