



# SSG/F 500-560 SOCKET SILENCER

Item no. 309946

Document type: **Product card**  
 Document date: **2019-06-20**  
 Generated by: **Systemair Online Catalogue**

## Description

### Socket silencer SSG/F

The socket silencers SSG/F are suitable for mounting on flat roofs. Casing made from aluzinc steel sheet, insulation/baffles of mineral wool with textile lining. Insulation 40 mm thick on side walls is secured with an additional metallic guard. The sound absorption at 250 Hz is in average 8 dB. Silencers come complete with nuts at the bottom to fix further inlet-side accessories. Supplied with appropriate high-temperature sealing between socket and fan.


Suitable for DVG-H, DVG-V fans.



## Technical parameters

Other	
Weight	62 kg

## Dimensions

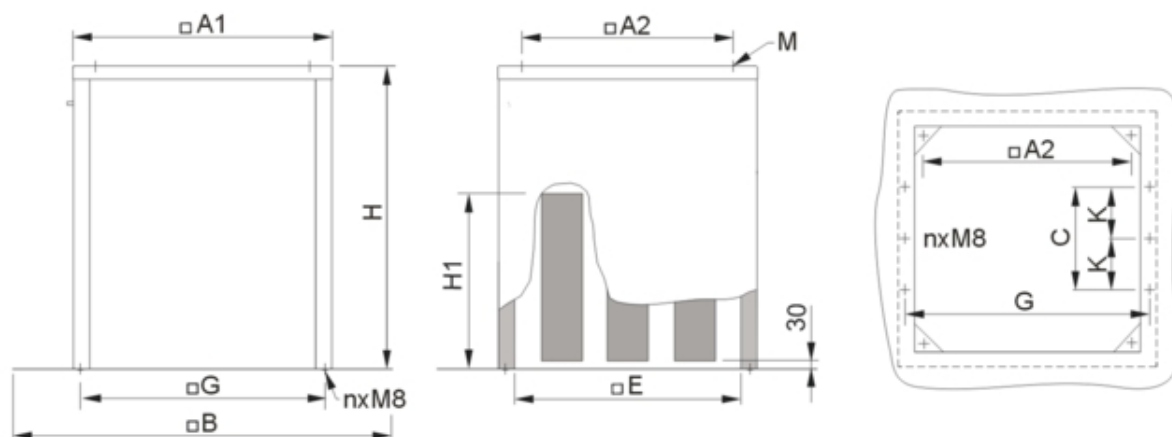

	A1	A2	B	M	E	H	H1	C	K	G	n
SSG/F 500-560	898	750	1147	10	808	700	412	471	235,5	866	6

## Accessories

## Documentation

IMO\_FDV\_FDG\_SSV\_SSG\_24\_05\_2016.pdf (1,45MB)

SSG\_F\_560\_01.dxf (61,21kB)


### Get In Touch

Call: [0845 6880112](tel:08456880112)  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
 Settle, North Yorkshire, BD24 9RH

Diagram

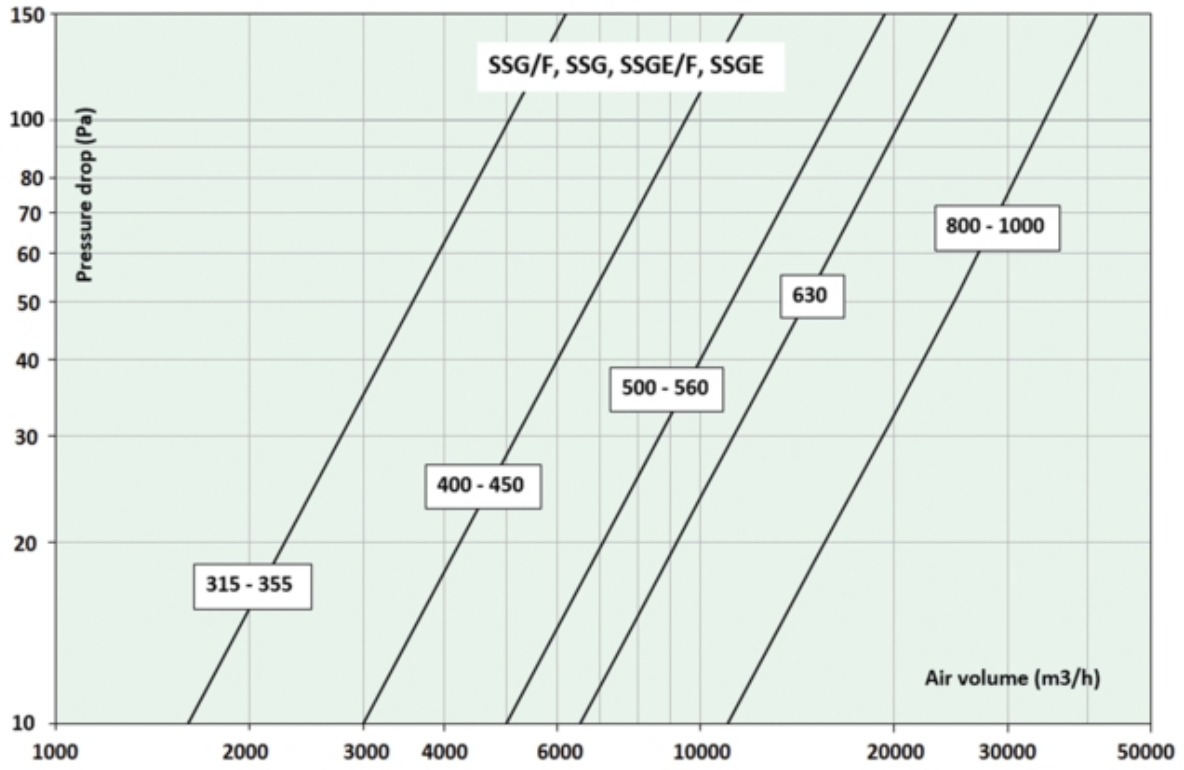

Mid-frequency (Hz)	125	250	500	1k	2k	4k	8k
Attenuation (dB)	3,5	6,7	9,5	15,5	15	13	9

Name: **SSG/F 500-560 SOCKET SILENCER** | Item no.: **309946**

2 / 2

Document type: **Product card** | Document date: **2019-06-20** | Generated by: **Online catalogue**

Get In Touch

Call: [0845 6880112](tel:08456880112)  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
 Settle, North Yorkshire, BD24 9RH

