



SSG/F 630 SOCKET SILENCER

Item no. 309947

Document type: **Product card**
 Document date: **2019-06-20**
 Generated by: **Systemair Online Catalogue**

Description

Socket silencer SSG/F

The socket silencers SSG/F are suitable for mounting on flat roofs. Casing made from aluzinc steel sheet, insulation/baffles of mineral wool with textile lining. Insulation 40 mm thick on side walls is secured with an additional metallic guard. The sound absorption at 250 Hz is in average 8 dB. Silencers come complete with nuts at the bottom to fix further inlet-side accessories. Supplied with appropriate high-temperature sealing between socket and fan.


Suitable for DVG-H, DVG-V fans.



Technical parameters

Other	
Weight	78 kg

Dimensions

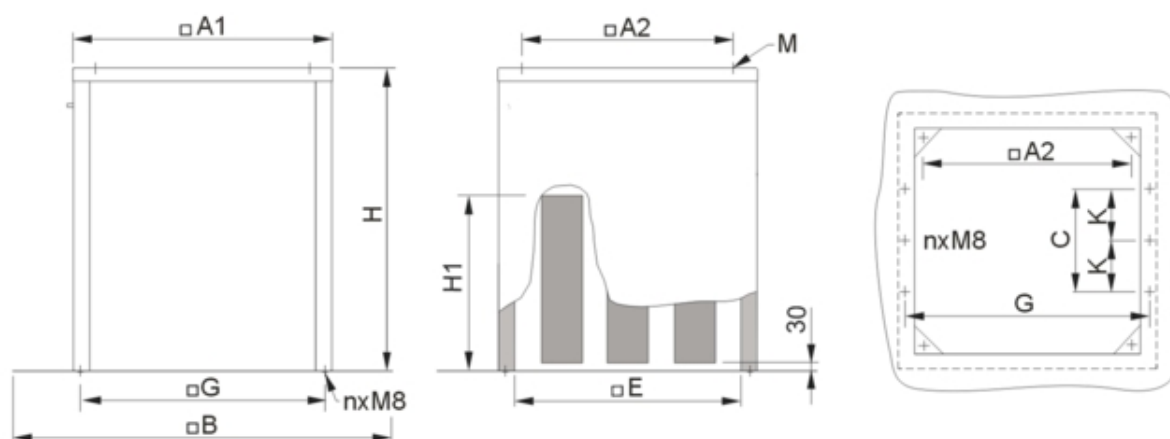

	A1	A2	B	M	E	H	H1	C	K	G	n
SSG/F 630	990	840	1300	10	898	800	412	508	254	956	6

Accessories

Documentation

IMO_FDV_FDG_SSV_SSG_24_05_2016.pdf (1,45MB)

SSG_F_630_20.dxf (62,04kB)


Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH

Diagram

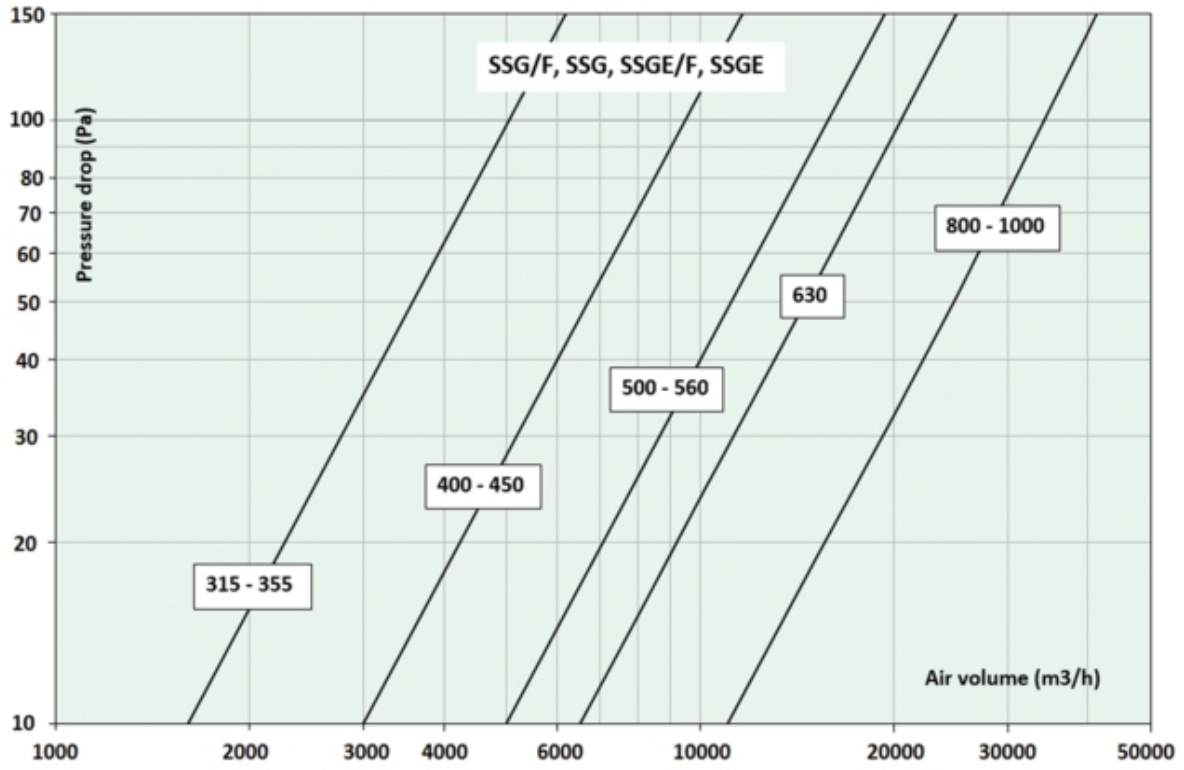

Mid-frequency (Hz)	125	250	500	1k	2k	4k	8k
Attenuation (dB)	3,5	6,7	9,5	15,5	15	13	9

Name: **SSG/F 630 SOCKET SILENCER** | Item no.: **309947**

2 / 2

Document type: **Product card** | Document date: **2019-06-20** | Generated by: **Online catalogue**

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH

