

# MUB 100 630D4-L


Centrifugal box fan, insulated, flexible outlet

Item Number: 235459

Variante: 400V 3~ 50Hz - 90° air flow

- High efficient motor
- Speed-controllable via frequency converter
- Integral cold conductor (PTC)
- Low sound level
- Flexible airflow direction due to removable panels
- Installation in any mounting position
- Easy to maintain and reliable

The MUB fan are equipped with high efficient motors. The MUB fans have an impeller with backward curved blades, manufactured from aluminum. Speed control is only possible by using a frequency converter. Motor protection is done by cold conductors (PTC), which have to be connected to an external motor protection device. The casing consists of an aluminum frame with fiberglass reinforced plastic corners of PA6; highly shock-resistant. The double skin panels are manufactured from galvanized steel with 30 mm mineral wool insulation. To avoid condensation the profile is provided with a separate chamber to fix screws. The Multibox fans are delivered for straight through airflow but can easily be rebuilt due to removable panels. This allows flexible ventilation solutions. The MUB can also be used as extract- or supply air unit in air handling units. Installation in any mounting position is possible.

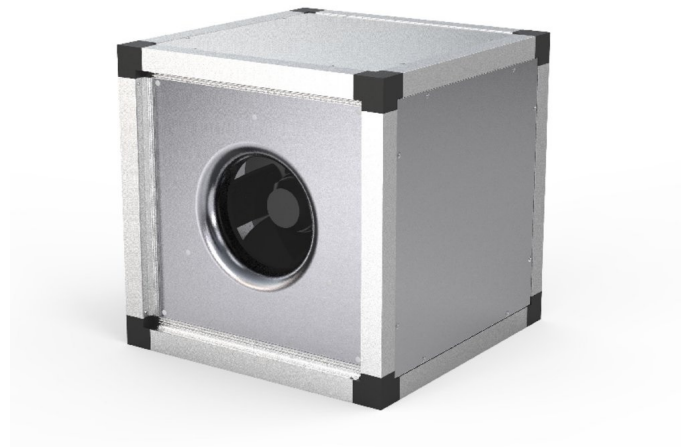

MUB with additional modules (filters, heaters etc.) are available as air handling units "K025, K042 or K062" on request!



## Technical parameters

Nominal data		
Voltage (nominal)	400	V
Frequency	50	Hz
Phases	3~	
Motor circuit connection	D	
Input power	5,154	W
Input current	8.3	A
Impeller speed	1,460	rpm
Air flow	max 5.5231	m³/s
Temperature of transported air	max 40	°C
Max temperature of transported air, when speed controlled	40	°C
Protection/Classification		
Enclosure class, motor	IP55	
Insulation class	F	

Article name: MUB 100 630D4-L | Product link: <https://shop.systemair.com/en-GB/productPermalink?p=522860> | Item Number: 235459 | Variante: 400V 3~ 50Hz - 90° air flow | Document type: Product card | Created at: 03.11.2022 | Generated by: Systemair Online Catalogue | Language: English

Page 1 of 8

### Get In Touch

 Call: 0845 6880112  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH

### Data according to ErP

ErP ready

ErP 2018

### Dimensions and weights

Weight

161.5 kg

### Others

Motor type

AC

Article name: MUB 100 630D4-L | Product link: <https://shop.systemair.com/en-GB/productPermalink?p=522860> | Item Number: 235459 | Variant: 400V 3~ 50Hz - 90° air flow | Document type: Product card | Created at: 03.11.2022 | Generated by: Systemair Online Catalogue | Language: English

Page 2 of 8

#### Get In Touch



Call: [0845 6880112](tel:08456880112)




Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

#### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH

# Performance

## Performance curve

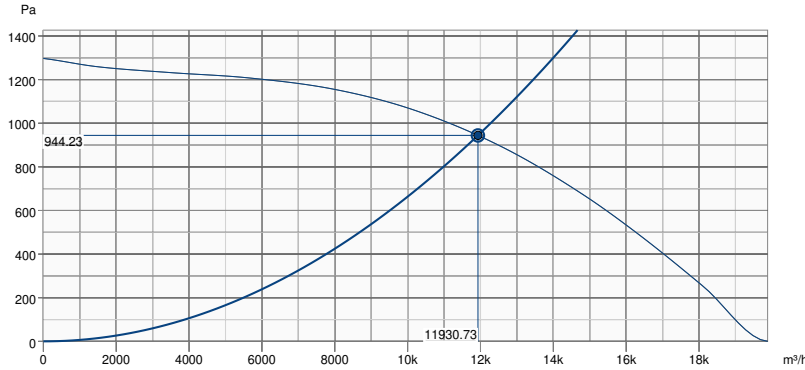

### Hydraulic data

Required air flow	11929.25 m³/h
Required static pressure	944 Pa
Working air flow	11930.73 m³/h
Working static pressure	944 Pa
Air density	1.204 kg/m³
Power	5154.9 W
Fan control - RPM	1460 rpm
Current	8.30 A
SFP	1.555 kW/m³/s
Control voltage	400.0 V
Supply voltage	400 V

Sound power level		63	125	250	500	1k	2k	4k	8k	Total
Inlet	dB(A)	56	78	74	79	79	78	74	69	85
Outlet	dB(A)	58	80	76	81	81	80	76	71	87
Surrounding	dB(A)	38	68	61	50	52	52	45	36	69
Sound pressure level at 3m (20m² Sabine)	dB(A)	-	-	-	-	-	-	-	-	62
Sound pressure level at 3m free field	dB(A)	-	-	-	-	-	-	-	-	48

Article name: MUB 100 630D4-L | Product link: <https://shop.systemair.com/en-GB/productPermalink?p=522860> | Item Number: 235459 | Variant: 400V 3~ 50Hz - 90° air flow | Document type: Product card | Created at: 03.11.2022 | Generated by: Systemair Online Catalogue | Language: English

### Get In Touch

Call: 0845 6880112  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)


### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard, Settle, North Yorkshire, BD24 9RH



## Dimension

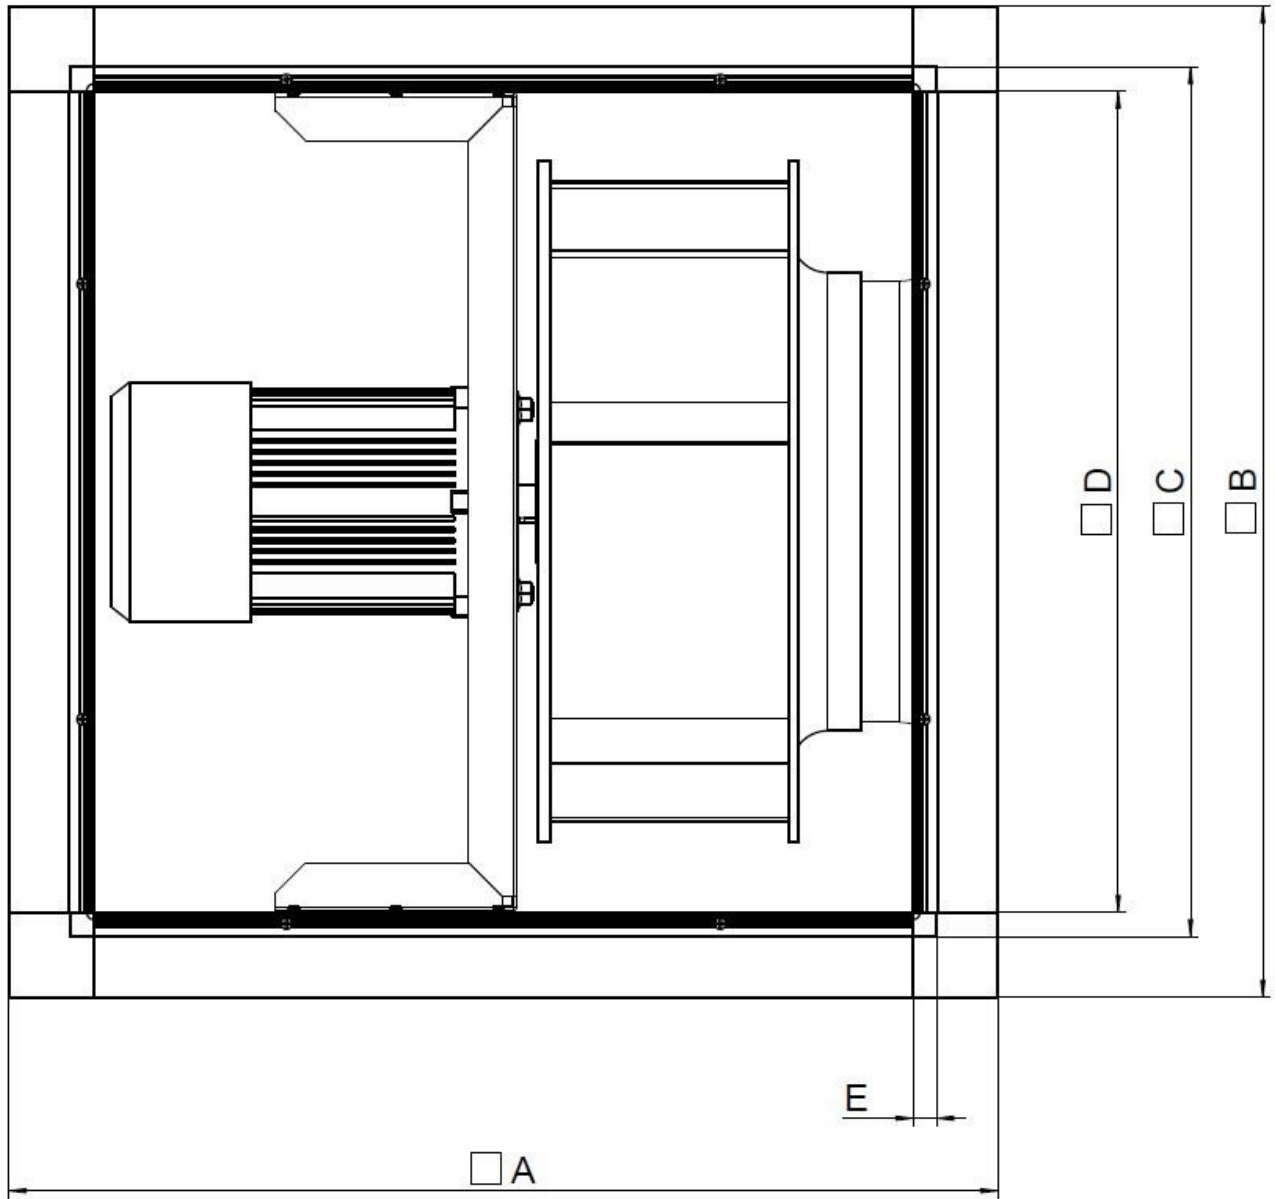

MUB 100	□A	□B	□C	□D	E
630/710	1020	1020	920	878	21



Article name: MUB 100 630D4-L | Product link: <https://shop.systemair.com/en-GB/productPermalink?p=522860> | Item Number: 235459 | Variant: 400V 3~ 50Hz - 90° air flow | Document type: Product card | Created at: 03.11.2022 | Generated by: Systemair Online Catalogue | Language: English

Page 4 of 8


### Get In Touch

 Call: [0845 6880112](tel:08456880112)  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH

**Dreiphasenmotor mit Kaltleiter**  
Three phase motor with cold conductor  
Moteur triphasé avec résistance PTC

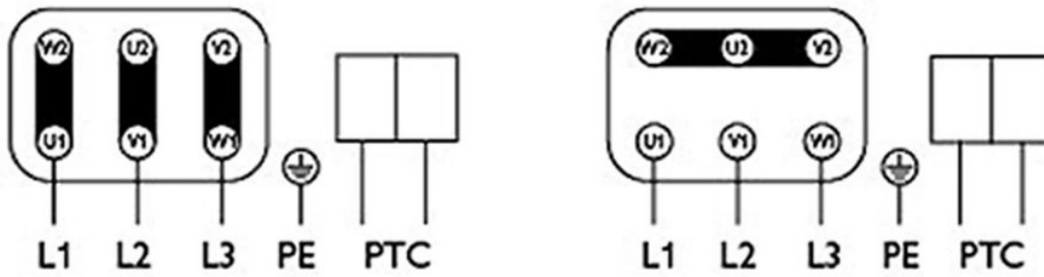

3 x 400V  
D Schaltung  
Delta connection  
Branchement en triangle

3 x 690V  
Y Schaltung  
Star connection  
Branchement en étoile

Drehrichtungsänderung durch Vertauschen von 2 Phasen  
Changing of direction of rotation by interchanging of two phases  
Changement de sens de rotation par inversion de deux phases

Typenschild beachten! See label! Voir plaque!

Get In Touch

Call: 0845 6880112  
Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH



## Acoustic

The Level of Casing-Breakout-Noise depends on the quality of shielding the acoustic inlet and outlet noises.

The shown Level of Casing-Breakout-Noise will be reached only in case of 100 % shielding the acoustic inlet and outlet noise and a correspondingly low environment noise.

### Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH

## Ecodesign

Product	
Trade name	Systemair
Product name	MUB 100 630D4-L IE3
Ecodesign	
ErP compliance	2018
Unit category	NRVU
Drive	External MSD or VSD
Unit type	UVU
Heat recovery type	None
Temperature ratio (UVU)	Not applicable
qv nom	3.31 m <sup>3</sup> /s
P nom	5.154 kW
Ps nom	944 Pa
Fan efficiency	60.7 %
External Leakage	5 %
Sound power level LWA	87 dB(A)

Article name: MUB 100 630D4-L | Product link: <https://shop.systemair.com/en-GB/productPermalink?p=522860> | Item Number: 235459 | Variant: 400V 3~ 50Hz - 90° air flow | Document type: Product card | Created at: 03.11.2022 | Generated by: Systemair Online Catalogue | Language: English

Page 7 of 8

### Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH

## Accessories

- FGV 100/916-916 flex. conn. (4199)
- Frequency converter FRQ5-10A (36230)
- Frequency converter FXDM14AM (31389)
- SD-MUB Vibration pad set (37324)
- U-EK230E Motor protection (30199)
- WSG 100 MUB complete (31487)
- REV-5POL/07-EMV-7,5kW R/Y (34549)
- KKC-DX-L 100 cooling section (277263)
- KKC-W-L 100 cooling section (277271)
- KKH-HW 100 heater-section (93341)
- Frequency converter FRQ-10A (36228)
- Frequency converter FRQ5S-10A (36234)
- REV-5POL/05-7,5kW R/Y (33979)
- TUNE-AHU-DE009-100-918x918-M0 (79883)
- WSD 100 (1060x1060x70) compl. (31483)
- Frequency converter FRQS-10A (36232)
- GRU 100 base frame h= 100mm (276663)
- KKC-DX-R 100 cooling section (277267)
- KKC-W-R 100 cooling section (277275)
- KKS 100 silencer-section (276853)

## Documents

- Installation, Operation and Maintenance instruction\_001
- UKCA DECLARATION OF CONFORMITY\_MUB\_EN\_002.PDF
- COMMISSIONING REPORT\_FANS\_160628\_EN\_001.PDF

### Get In Touch

-  Call: [0845 6880112](tel:08456880112)
-  Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH