



# TFF 125 SUPPL VALVE RAL9010

Item no. 6091

Document type: **Product card**Document date: **2019-06-11** 

Generated by: Systemair Online Catalogue

### Description

The Systemair TFF circular supply diffuser. This diffuser has a shielding device for producing a directional (180°) distribution pattern and has an adjustable gap.

#### Function

The TFF is a circular supply diffuser for ceiling installation. The TFF consists of an inlet cone and diffuser unit containing sound-absorbent material. The technical specifications of the diffuser unit give it a wide range of applications. By rotating diffuser unit, the throw and pressure drop can be adjusted steplessly. Both concentric and eccentric distribution patterns can be selected by using the shielding device provided.

### Design

The TFF is manufactured from sheet steel with a white powder-coated finish (RAL 9010-80) and is available in the following diameters: Ø 80, Ø 100, Ø 125, Ø 150, Ø 160 and Ø 200.

#### How to use for exhaust air

This device can be used for exhaust air.

### Mounting

The TFF is easily fitted, either into the mounting frame or directly onto the duct using

its friction springs. If the TFF is fitted to a PER plenum box, there must be a straight length, 4 times the duct's diameter, in front of the PER plenum box

Air deflector for screening of direction up to 180 degree.

Technical details can be found here

### **Technical parameters**

| Other  |      |    |
|--------|------|----|
| Weight | 0,37 | kg |

Name: TFF 125 SUPPL VALVE RAL9010 | Item no.: 6091

 $\hbox{ Document type: } \textbf{Product card} \mid \hbox{ Document date: } \textbf{2019-06-11} \mid \hbox{ Generated by: } \textbf{Online catalogue}$ 



6

Call: <u>0845 6880112</u>




**Get In Touch** 

Email: info@adremit.co.uk



### **Dimensions**

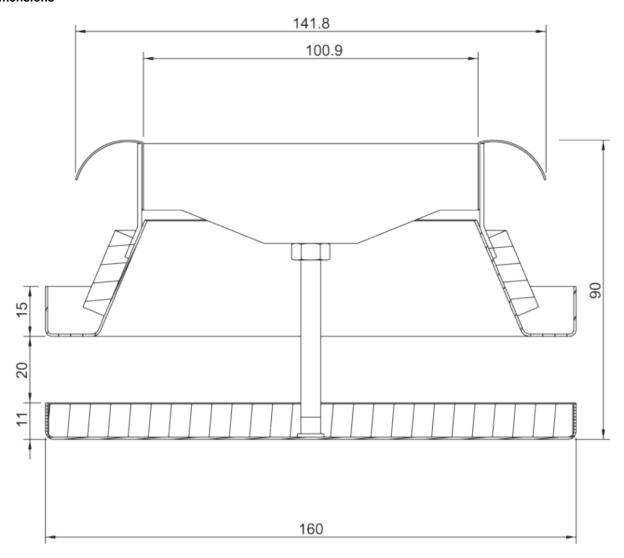

## Accessories

## Accessories

RFP-125 Mounting Frame (6126) RFU-125 Mounting Frame (6131)

THOR-100-125 (66758)

RFP-125L Mounting Frame 50mm (18704)

## **Documentation**





 $\label{eq:Document type: Product card | Document date: 2019-06-11 | Generated by: Online \ catalogue \\$ 



**Get In Touch** 



Email: info@adremit.co.uk




# Diagram

The diagram shows

Air volume (I/s and m3/h), total pressure (Pa), throw (I0,2), and sound pressure level [dB(A)] for air gaps measuring 10, 20, and 30 mm. There is a 15 mm air gap when the unit is shielded 180°, but the data for a 10 mm air gap still apply. The throw value, however, should be multiplied by 1,2.

Diagrams for TFF + PER is shown for TFF with an air gap of 30 mm.

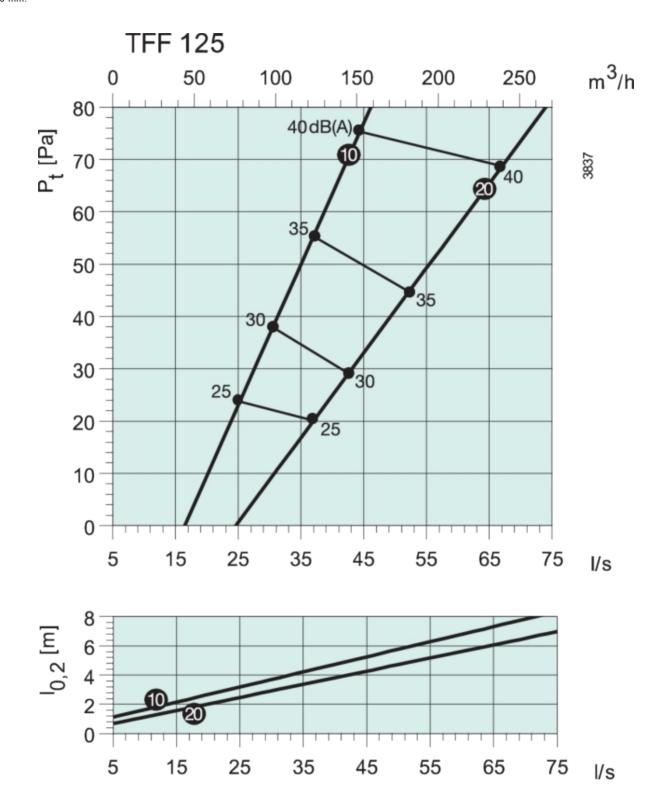

Name: TFF 125 SUPPL VALVE RAL9010 | Item no.: 6091


Document type: Product card | Document date: 2019-06-11 | Generated by: Online catalogue



6





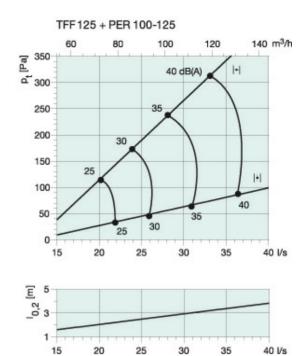

Name: TFF 125 SUPPL VALVE RAL9010 | Item no.: 6091

 $\label{eq:Document type: Product card | Document date: 2019-06-11 | Generated by: Online \ catalogue \\$ 



**Get In Touch** 

Call: 0845 6880112Email: info@adremit.co.uk



### Sound attenuation, $\Delta L$ (dB)

| Mid-frequency band, Hz |    |     |     |     |    |    |    |    |  |
|------------------------|----|-----|-----|-----|----|----|----|----|--|
|                        | 63 | 125 | 250 | 500 | 1k | 2k | 4k | 8k |  |
| TFF 080                | 24 | 19  | 15  | 11  | 2  | 3  | 6  | 7  |  |
| TFF 100                | 22 | 17  | 13  | 10  | 2  | 2  | 7  | 8  |  |
| TFF 125                | 18 | 16  | 12  | 8   | 3  | 3  | 7  | 8  |  |
| TFF 150                | 18 | 15  | 11  | 9   | 4  | 5  | 7  | 9  |  |
| TFF 160                | 18 | 15  | 11  | 9   | 4  | 5  | 7  | 9  |  |
| TFF 200                | 16 | 13  | 9   | 7   | 5  | 5  | 8  | 8  |  |
| TFF 125 + THOR         | 22 | 17  | 13  | 16  | 8  | 9  | 11 | 13 |  |

TFF 160 + THOR 20 17 12 15 9 11 12 13 TFF 200 + THOR 19 16 12 16 11 12 11 12

Sound power level, Lw

Lw(dB) = LpA + Kok (LpA = diagram Kok = table) correction factor Kok

|                | 63 | 125 | 250 | 500 | 1k | 2k  | 4k  | 8k  |
|----------------|----|-----|-----|-----|----|-----|-----|-----|
| TFF 080        | 16 | 9   | 6   | 0   | -3 | -11 | -16 | -20 |
| TFF 100        | 19 | 8   | 6   | 1   | -7 | -15 | -19 | -21 |
| TFF 125        | 24 | 10  | 4   | -2  | -8 | -15 | -20 | -19 |
| TFF 150        | 23 | 11  | 5   | -2  | -9 | -14 | -18 | -23 |
| TFF 160        | 23 | 11  | 5   | -2  | -9 | -14 | -18 | -23 |
| TFF 200        | 19 | 9   | 8   | 0   | -7 | -13 | -17 | -21 |
| TFF 125 + THOR | 14 | 8   | 9   | -1  | -5 | -11 | -15 | -17 |
| TFF 160 + THOR | 15 | 7   | 10  | -1  | -7 | -15 | -18 | -21 |
| TFF 200 + THOR | 18 | 8   | 7   | -1  | -4 | -11 | -13 | -15 |
| Tolerance      | ±6 | ±5  | ±2  | ±2  | ±2 | ±2  | ±2  | ±3  |

### **Specification text**

Name: TFF 125 SUPPL VALVE RAL9010 | Item no.: 6091

 $\label{eq:Document type: Product card | Document date: 2019-06-11 | Generated by: Online \ catalogue \\$ 



Get In Touch



Call: 0845 6880112Email: info@adremit.co.uk