



TRF-DVV 630 -TRANSTION FRAME

Item no. 95586

Document type: Product card Document date: 2019-05-29


Generated by: Systemair Online Catalogue

Description

Socket silencer for DVG

The roof sockets FDGE/F are suitable for pitched roof constructions up to a max. angle of 30° . Angle of supports and height above roof can be adjusted on the socket -3 positions to fasten and rotate the supports.

Casing manufactured from aluzinc steel sheet, insulation of mineral wool with a textile lining. Insulation is secured with an additional metallic guard. The surface of insulation is abrasion resistant. Supplied with sealing between socket and fan.



Technical parameters

Other		
Weight	22,2	kg

Name: TRF-DVV 630 -TRANSTION FRAME | Item no.: 95586

Document type: Product card | Document date: 2019-05-29 | Generated by: Online catalogue



Get In Touch

Call: <u>0845 6880112</u>




Email: info@adremit.co.uk

1/2



Dimensions

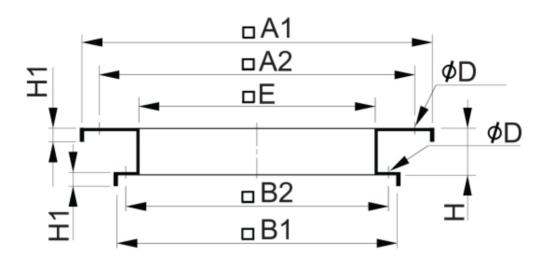

	A1	A2	Е	B1	B2	Н	H1	D
95586 Transition frame	990	840	760	980	880	100	25	20

Name: TRF-DVV 630 -TRANSTION FRAME | Item no.: 95586

 $\label{eq:Document type: Product card | Document date: 2019-05-29 | Generated by: Online \ catalogue \\$





Get In Touch

Email: info@adremit.co.uk