

UNICO EASY

The console air-conditioner without outdoor unit.



SUPPORTING LEGS

Equipped with two supporting legs for a more stable positioning.



TOUCH DISPLAY

Latest generation digital control panel, for precise control over all the functions.



HEAT PUMP

Heat pump air conditioner. Thanks to this feature you you can replace or support traditional heating in intermediate seasons (only in HP version).

FEATURES

Max Power: 2.0 kW

Available in the versions: SF (Cool Only) - HP (Heat Pump)

Cooling class **A**

R410A refrigerant gas*

Floor installation

Ease of installation: Unico can be installed from the inside in just a few minutes

Control display on the touch screen machine

Remote control supplied

24h timer


FUNCTIONS

Fan only mode

Dehumidification only mode

Auto mode: changes parameters depending on ambient temperature.

Sleep mode: gradually increases the temperature set and ensures reduced noise for greater wellbeing at night.

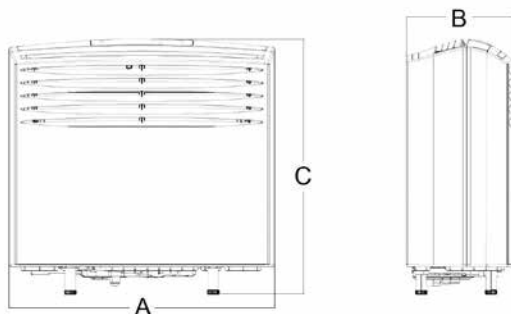

UNICO EASY			
A	B	C	Weight
693 mm	276 mm	665 mm	36 kg

* Hermetically sealed equipment containing fluorinated gas with GWP equivalent 2088.

Get In Touch









Call: 0845 6880112



Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard, Settle, North Yorkshire, BD24 9RH

			Unico Easy S1 SF	Unico Easy S1 HP
PRODUCT CODE			02037	02036
EAN CODE			8021183020373	8021183020366
Cooling power (min/max)		kW	-	-
Heating power (min/max)		kW	-	-
Nominal cooling capacity (1)	P rated	kW		
Nominal heating capacity (1)	P rated	kW	-	
Nominal power consumption for cooling (1)	PEER	kW	0,8	0,8
Nominal absorption for cooling (1)		A	3,45	3,45
Nominal power consumption for heating (1)	PCOP	kW	-	0,7
Nominal absorption for heating (1)		A	-	3,00
Nominal energy efficiency index (1)	EERd		2,6	2,6
Nominal efficiency coefficient (1)	COPd		-	2,7
Energy efficiency class in cooling (1)				
Energy efficiency class in heating (1)			-	
Energy consumption in "thermostat off" mode	PTO	W	1,0	1,0
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	0,5
Energy consumption for double pipe appliances (1) cooling	QDD	kWh/h	0,8	0,8
Energy consumption for double pipe appliances (1) heating	QDD	kWh/h	-	0,7
Supply voltage		V-F-Hz	220/240-1-50	220/240-1-50
Supply voltage (min/max)		V	198 / 264	198 / 264
Maximum power consumption in cooling mode		kW	1,027	1,036
Maximum absorption in cooling mode		A	5,46	5,55
Maximum power consumption in heating mode		kW	-	1,036
Maximum absorption in heating mode		A	-	5,6
Dehumidification capacity		l/h	2,2	2,2
Air flow rate in cooling environment (max/med/min)		m³/h	405 / 370 / 335	405 / 370 / 335
Air flow rate in heating environment (max/med/min)		m³/h	-	405 / 370 / 335
External air flow rate in cooling (max/min)		m³/h	505 / 0	505 / 0
External air flow rate in heating (max/min)		m³/h	-	505 / 0
Internal ventilation speed			3	3
External ventilation speed			2	2
Diameter wall holes		mm	162	162
Electric resistance heating			-	-
Maximum remote control range (distance / angle)		m / °	8 / ±80°	8 / ±80°
Dimensions (W x H x D) (without packaging)		mm	693 x 665 x 276	693 x 665 x 276
Dimensions (W x H x D) (with packaging)		mm	770 x 865 x 421	770 x 865 x 423
Weight (without packaging)		Kg	36	35,6
Weight (with packaging)		Kg	41	40,9
Internal sound power level (EN 12102)	LWA	dB(A)	60	60
Degree of protection provided by covers			IP X0	IPX0
Refrigerant gas*		Type	R410A	R410A
Global warming potential	GWP		2088	2088
Refrigerant gas charge		kg	0,51	0,515
Maximum operating pressure		MPa	4,2	4,2
Power cable (N° pole x section mm²)			3 x 1,5	3 x 1,5



LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 32°C – WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -5°C

(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 15°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C.

* Hermetically sealed equipment containing fluorinated GAS with GWP equivalent to 2088.

Get In Touch

 **Call:** 0845 6880112
 **Email:** info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard, Settle, North Yorkshire, BD24 9RH