



VBR 100-50-3 WATER HEATING BAT


Item no. 5478

Document type: **Product card**
 Document date: **2019-05-15**
 Generated by: **Systemair Online Catalogue**


Description

Water-heating battery

Water-heating battery for heating air in ventilation systems with rectangular ducts. Hot-zinc-coated casing, heat transmission element with copper tubes and aluminium fins. In cold conditions, a frost protection device with sensor should be fitted to reduce the risk of damage from freezing. The water-heating battery can be installed in a horizontal or vertical duct with an optional direction.

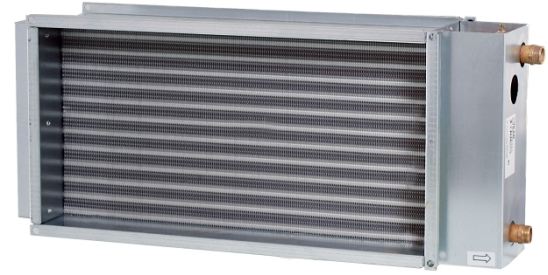

Dimensions

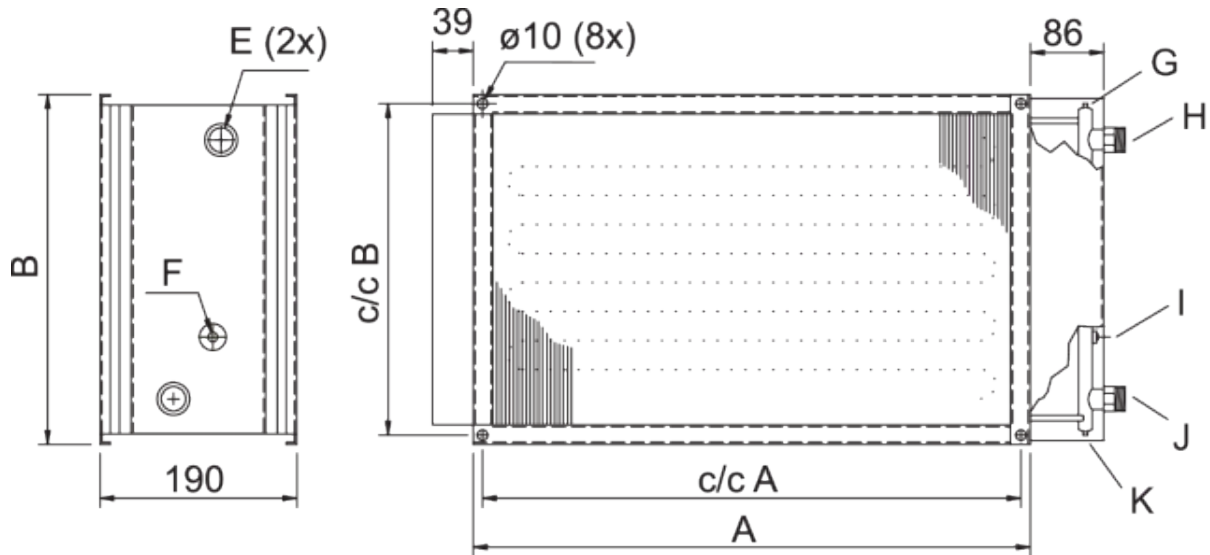

- F= Thread G 1/4
- G= Airing
- H= Water out
- I= Connection for immersion sensor
- J= Water in
- K= Draining

- VBR XX-XX-2 = Two pipe rows
- VBR XX-XX-4 = Four pipe rows
- VBR XX-XX-3 = Three pipe rows

Documentation

VBR IMO_172010.pdf (636,16kB)

Conformity_decl. PGK_VBR(PGV)_VBC(CWW)_CWK.pdf (17,06kB)

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH

Technical parameters

Max. operating temperature	150	°C
Max. operating pressure, at water temp. 100°C	1600000	Pa
Max. operating pressure, at water temp. 150°C	1000000	Pa

Accessories

Electric accessories

[AQUA 24TF Heat Regulator \(5136\)](#)

[TG-A130 Surface sensor 0-30°C \(5159\)](#)

[TG-K330 Duct Sensor 0-30°C \(5160\)](#)

[TG-D1/PT1000 Immersion sensor \(6773\)](#)

[RVAZ4-24 Actuator 3points \(9798\)](#)

[RVAZ4 24A Actuator 0-10V \(9862\)](#)

Accessories

[ZTV 20-6,0 2-way valve \(9827\)](#)

[ZTR 20-6,0 valve 3-way \(9679\)](#)

Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: info@adremi.co.uk

Our Address

Puravent, Adremi Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH