


| | width | t water | 800 | 900 | 1000 | 1100 | 1200 | 1300 | 1400 | 1500 | 1600 | 1700 | 1800 | 1900 | 2000 | 2100 | 2200 | 2300 | 2400 | 2500 | 2600 | 2700 | 2800 | 2900 | 3000 |
|----|-------|----------|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 65 | 245 | 95/85/20 | 150 | 181 | 211 | 242 | 273 | 304 | 335 | 366 | 397 | 428 | 458 | 489 | 551 | 551 | 582 | 613 | 644 | 674 | 705 | 736 | 767 | 798 | 829 |
| | | 75/65/20 | 101 | 122 | 143 | 164 | 185 | 206 | 227 | 248 | 269 | 289 | 310 | 331 | 352 | 373 | 394 | 415 | 436 | 457 | 478 | 498 | 519 | 540 | 561 |
| | | 50/40/20 | 45 | 55 | 64 | 73 | 83 | 92 | 102 | 111 | 120 | 130 | 139 | 148 | 158 | 167 | 176 | 186 | 195 | 205 | 214 | 223 | 233 | 242 | 251 |
| 65 | 305 | 95/85/20 | 173 | 208 | 244 | 279 | 315 | 351 | 386 | 422 | 457 | 493 | 528 | 564 | 635 | 635 | 671 | 706 | 742 | 778 | 813 | 849 | 884 | 920 | 956 |
| | | 75/65/20 | 118 | 143 | 167 | 191 | 216 | 240 | 265 | 289 | 313 | 338 | 362 | 386 | 411 | 435 | 460 | 484 | 508 | 533 | 557 | 582 | 606 | 630 | 655 |
| | | 50/40/20 | 54 | 65 | 77 | 88 | 99 | 110 | 121 | 133 | 144 | 155 | 166 | 177 | 189 | 200 | 211 | 222 | 233 | 245 | 256 | 267 | 278 | 289 | 300 |
| 65 | 355 | 95/85/20 | 185 | 223 | 261 | 299 | 337 | 375 | 413 | 451 | 490 | 528 | 566 | 604 | 680 | 680 | 718 | 756 | 794 | 832 | 870 | 909 | 947 | 985 | 1023 |
| | | 75/65/20 | 122 | 147 | 172 | 197 | 222 | 247 | 272 | 298 | 323 | 348 | 373 | 398 | 423 | 448 | 473 | 498 | 524 | 549 | 574 | 599 | 624 | 649 | 674 |
| | | 50/40/20 | 52 | 62 | 73 | 84 | 94 | 105 | 115 | 126 | 137 | 147 | 158 | 169 | 179 | 190 | 201 | 211 | 222 | 232 | 243 | 254 | 264 | 275 | 286 |

Installation

Natural Trench Heating is installed into a floor in such way that the heat exchanger is placed closer to the room than to a window. With this arrangement, the pipes connections are on the right side.

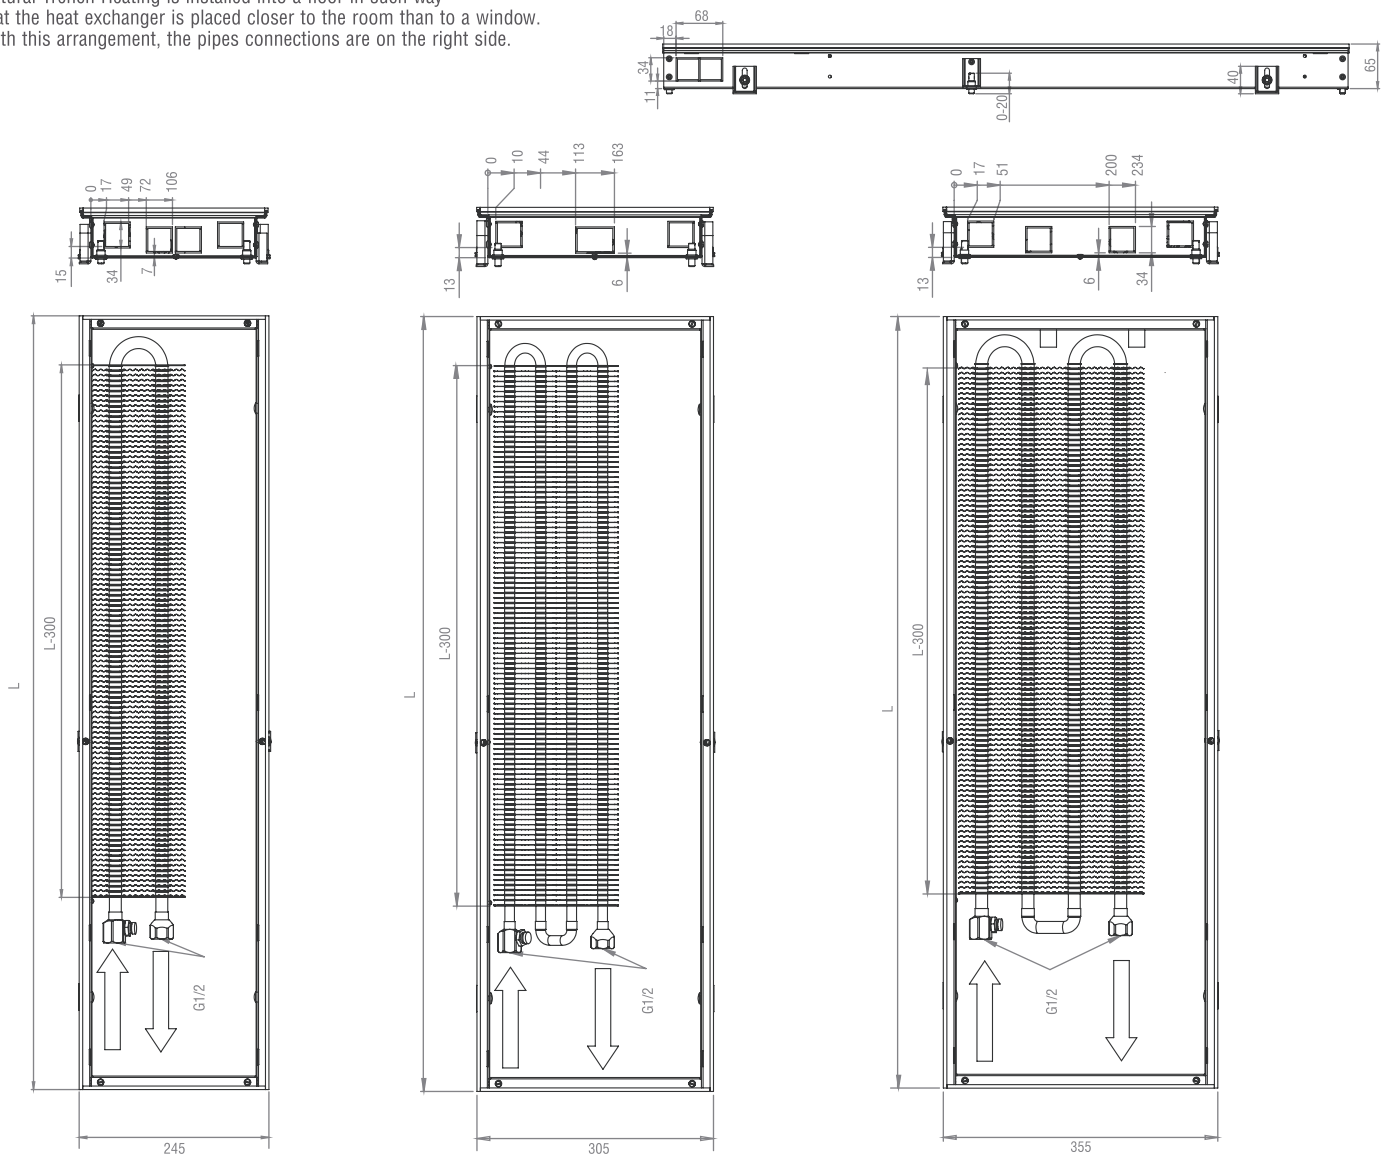

Hydraulic parameters of the heat exchangers are on a p. 48-53

Accessories



FLEXIBLE STEEL HOSES
HITTE, 1/2"



LOCK-SHIELD VALVE ARCO 1/2"



THERMOSTATIC VALVE ARCO 1/2"



ELECTRIC ACTUATOR
SIEMENS STA 73 AC/DC 24 NC



BALL VALVE ARCO 1/2"

Attention! Due to the continuous development of products, the manufacturer reserves the right to make additional changes without prior notice.

Get In Touch

Call: 0845 6880112
Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH