





## Technical parameters

Nominal data	
Voltage (nominal)	230 V
Frequency	50 Hz
Phases	1~
Input power	80 W
Maximum current	0.4 A
Air flow	max 0.185 m <sup>3</sup> /s
Sound data	
Sound pressure level at 3m (20m <sup>2</sup> Sabin)	53 dB(A)
Dimensions and weights	
Weight	0 kg
Others	
Motor type	AC

## Performances

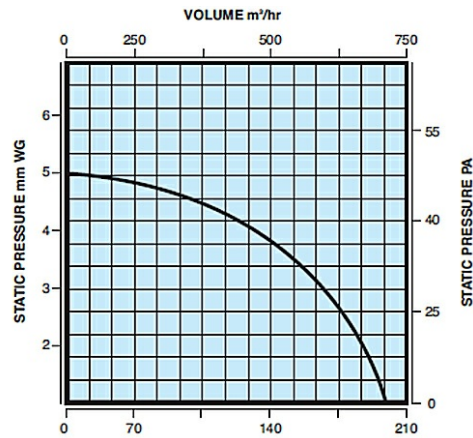

## Dimension



Product	A	B	C	D	E
ES6W	310	310	160-290	278	288
ES9W	390	390	160-290	361	366
ES12W	470	470	160-290	440	447


## Wiring

**NOTE (Diagram A)** The 6", 9" and 12" fans series can be wired via 3 core cable for intake only.

**NOTE (Diagram B)** The 6", 9" and 12" fans series can be wired via 3 core cable for extract only.

**NOTE (Diagram C)** If the 2 speed reversible controller is used with the 9" and 12" fans only. 5 core cable is required (which is available separately).

### Plug Wiring Diagram

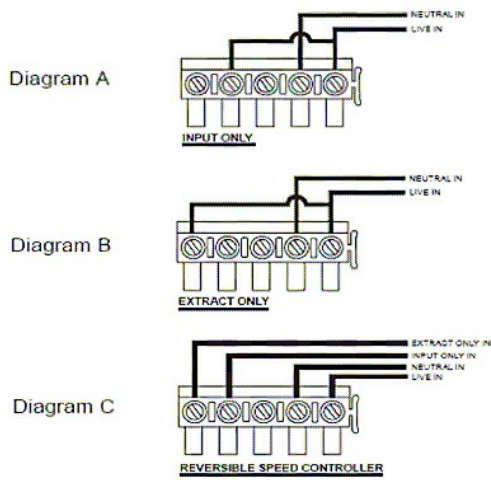

## Accessories

EAC9/12 Controller Systemair (16310)

EFS-PIR Remote Express-air (16322)

EFS-ISO Isolator switch (53272)

EFS-ROT Remote Express-air (16323)

## Documents

OM Commercial Wall Panel Fans.pdf