



## ZAC 800-63 CASED AXIAL FAN

Item no. 8289

Document type: **Product card**  
 Document date: **2019-05-07**  
 Generated by: **Systemair Online Catalogue**

### Description

The ZAC range of short-cased axial fans is based around the Ziehl-Abegg external rotor motor and an aerodynamically designed impeller to provide a very compact, efficient unit. Key features are:-

- Diecast aluminium blades with high efficiency aerofoil blade design
- Maintenance free, sealed-for-life bearings
- Insulation class 'F' and IP54 protection
- Operating range of -40°C to 60°C or 70°C
- TK thermal protection
- 100% speed controllable motor
- Galvanised steel casing incorporating a flange at either end
- Corrosion resistant paint in pebble grey RAL7032
- IP54 terminal box located on outside of fan casing

Guards are available as an accessory.



### Technical parameters

Voltage	400	V
Frequency	50	Hz
Phase	3	~
Input power (P1)	1400	W
Current	2,7	A
Max. airflow	6,32	m³/s
R.p.m.	900	r.p.m.
Max. temperature of transported air	60	°C
Max. temperature of transported air when speed-controlled	60	°C
Sound pressure level at 3 m	62	dB(A)
Weight	39	kg
Insulation class	F	
Enclosure class, motor	IP54	

### Accessories

#### Electric accessories

[RTRD 4 Speed cont. Systemair \(5942\)](#)

#### Accessories

[FSAF800FTX Mtg ft ea dual \(8617\)](#)

[FSAF800FC Flx con ea 90°C \(8639\)](#)

[FSAFAV MP1 33 Green each \(89401\)](#)

[FSAF800MX Flange ea dual \(53087\)](#)

[APK 800X Ancil Pack Dual Drill \(8824\)](#)


#### Get In Touch

**Call:** [0845 6880112](tel:08456880112)  
**Email:** [info@adremit.co.uk](mailto:info@adremit.co.uk)

#### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
 Settle, North Yorkshire, BD24 9RH

## Dimensions

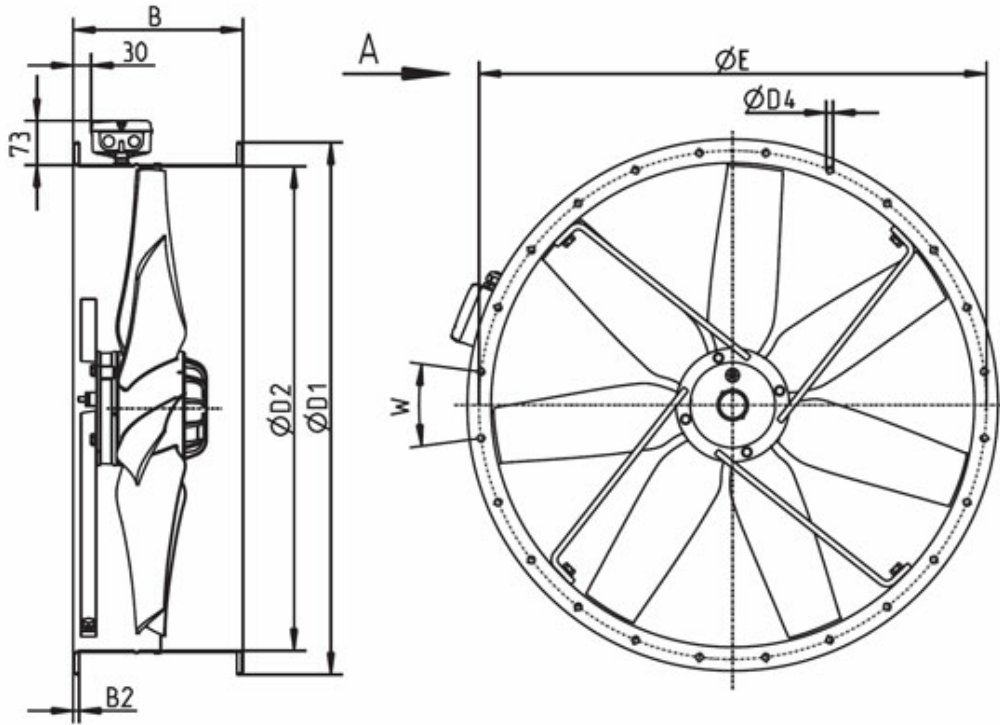

ZAC 800-63	B	B2	B4	D1	D2	D4	E	W
	280	10	33	875	797	11.5	837	24 X 15°

Name: **ZAC 800-63 CASED AXIAL FAN** | Item no.: **8289**

2 / 4

Document type: **Product card** | Document date: **2019-05-07** | Generated by: **Online catalogue**

### Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH

## Wiring

<b>106XA</b>	<b>106XB</b>																												
Luftförderrichtung: V	Luftförderrichtung: A																												
Direction of airflow: V	Direction of airflow: A																												
Drehrichtung: Rechtslauf	Drehrichtung: Linkslauf																												
Direction of rotation: clockwise	Direction of rotation: counter clockwise																												
3~ Motor mit einer Drehzahl und Thermostatschalter (falls eingebaut).	3~ Motor mit einer Drehzahl und Thermostatschalter (falls eingebaut).																												
3~ motor with one speed and thermostatic switch (if built in).	3~ motor with one speed and thermostatic switch (if built in).																												
Moteur triphasé à une vitesse avec interrupteur thermostatique (si incorporé).	Moteur triphasé à une vitesse avec interrupteur thermostatique (si incorporé).																												
<table style="width: 100%; border: none;"> <tr><td>U1</td><td>braun</td><td>brown</td><td>brun</td></tr> <tr><td>V1</td><td>blau</td><td>blue</td><td>bleu</td></tr> <tr><td>W1</td><td>schwarz</td><td>black</td><td>noir</td></tr> <tr><td>U2</td><td>rot</td><td>red</td><td>rouge</td></tr> <tr><td>V2</td><td>grau</td><td>grey</td><td>gris</td></tr> <tr><td>W2</td><td>orange</td><td>orange</td><td>orangé</td></tr> <tr><td>TB</td><td>weiß</td><td>white</td><td>blanc</td></tr> </table>	U1	braun	brown	brun	V1	blau	blue	bleu	W1	schwarz	black	noir	U2	rot	red	rouge	V2	grau	grey	gris	W2	orange	orange	orangé	TB	weiß	white	blanc	<b>106XA-02</b>
U1	braun	brown	brun																										
V1	blau	blue	bleu																										
W1	schwarz	black	noir																										
U2	rot	red	rouge																										
V2	grau	grey	gris																										
W2	orange	orange	orangé																										
TB	weiß	white	blanc																										
<table style="width: 100%; border: none;"> <tr><td>U1</td><td>braun</td><td>brown</td><td>brun</td></tr> <tr><td>V1</td><td>blau</td><td>blue</td><td>bleu</td></tr> <tr><td>W1</td><td>schwarz</td><td>black</td><td>noir</td></tr> <tr><td>U2</td><td>rot</td><td>red</td><td>rouge</td></tr> <tr><td>V2</td><td>grau</td><td>grey</td><td>gris</td></tr> <tr><td>W2</td><td>orange</td><td>orange</td><td>orangé</td></tr> <tr><td>TB</td><td>weiß</td><td>white</td><td>blanc</td></tr> </table>	U1	braun	brown	brun	V1	blau	blue	bleu	W1	schwarz	black	noir	U2	rot	red	rouge	V2	grau	grey	gris	W2	orange	orange	orangé	TB	weiß	white	blanc	<b>106XB-02</b>
U1	braun	brown	brun																										
V1	blau	blue	bleu																										
W1	schwarz	black	noir																										
U2	rot	red	rouge																										
V2	grau	grey	gris																										
W2	orange	orange	orangé																										
TB	weiß	white	blanc																										
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Δ-Schaltung Δ-connection Montage Δ</p> </div> <div style="text-align: center;"> <p>Y-Schaltung Y-connection Montage Y</p> </div> </div>	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Δ-Schaltung Δ-connection Montage Δ</p> </div> <div style="text-align: center;"> <p>Y-Schaltung Y-connection Montage Y</p> </div> </div>																												
Anschlusschaltbild im Anschlusskasten aufbewahren. Keep wiring diagram in terminal box. Conserver le schéma de raccordement dans la boîte à bornes.	Anschlusschaltbild im Anschlusskasten aufbewahren. Keep wiring diagram in terminal box. Conserver le schéma de raccordement dans la boîte à bornes.																												

## Documentation

[Operating Instruction axial fans L-BAL-001-GB\[1\].pdf \(117,64kB\)](#)

## Acoustics

Frequency (Hz)	63	125	250	500	1000	2000	4000	8000	16000	dBW Total	dBA Total	dBA @ 3m
Sound Power (dBW)	72	83	79	75	75	77	74	64	59	86	82	62


### Get In Touch

Call: [0845 6880112](tel:08456880112)  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH

## Diagram

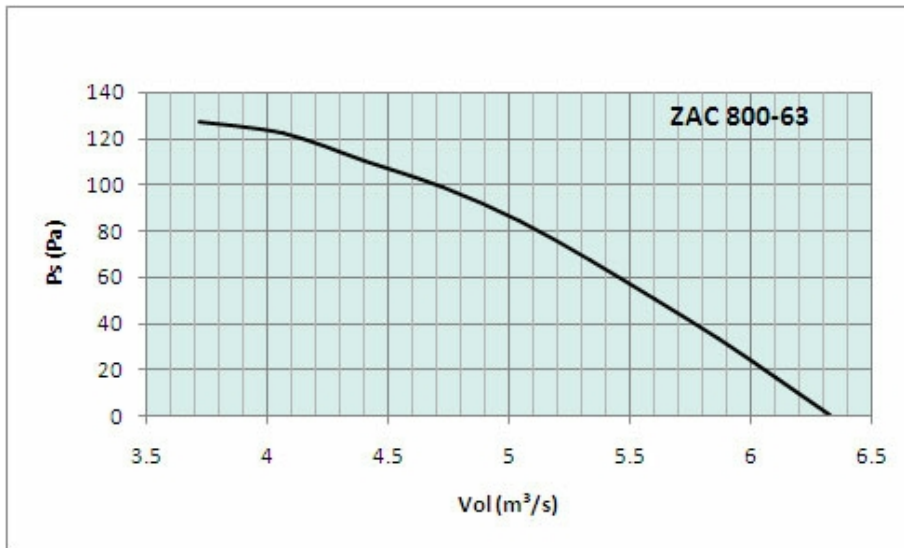

## Specification text

Name: **ZAC 800-63 CASED AXIAL FAN** | Item no.: **8289**

Document type: **Product card** | Document date: **2019-05-07** | Generated by: **Online catalogue**

4 / 4

### Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH