



infrago

Instant Heat Efficiently



600 Radiant Tube Series

Part L 2010 Compliant



- **Six input ratings: 15kW to 47kW**
- **Available in Linear and 'U' models**
- **'Herringbone' link flue systems available with 'U' and Linear models**
- **Heat treated Aluminised Calorised emitter tube surface - for a flake free cleaner working environment**
- **Available in Natural gas and Propane**
- **Aluminium reflectors - designed to maximise downward radiant heating effect**
- **Lightweight construction - 4" tubes supplied in 3m sections - easy to assemble and fit**
- **CE Approved**
- **Energy efficient - cost saving fuel bills**
- **UK Manufactured under ISO9001:2008 quality assured systems**

Get In Touch

 Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

SPECIFICATION GUIDE - 600 SERIES PART L 2010 COMPLIANT



Model No.	615NU	625NU	630NU	635NU	640NU	645NU	615NL	625NL	630NL	635NL	640NL	645NL
Heat Input, kW Hs	15.0	23.0	29.2	34.5	42.2	47.0	15.0	23.0	29.2	34.5	42.2	47.0
Heat Input, kW Hi	13.5	20.7	26.3	31.1	38.0	42.3	13.5	20.7	26.3	31.1	38.0	42.3
Length mm - A	3100	5385	5510		6970		5495	10065	9955		13000	
Width mm - B	460		715				460	340				
Height mm - C	175		210				175	180				
Weight Kg	31	47	66		81		27	46	62		79	
Gas Connection	R - 1/2											
Supply Pressure	Natural Gas - 20mbar Propane - 37mbar											
Electrical Supply	230v~50Hz 125W, Current rating 0.55A, fuse externally 3A											
Flue Diameter	127mm Dia. or 100mm Dia.											
Air Inlet Connection	101.6mm Dia.											

RECOMMENDED MOUNTING HEIGHT RANGE (General guidance only)

Model No.	615NU/NL	625NU/NL	630NU/NL	635NU/NL	640NU/NL	645NU/NL
Horizontal m	2.4 - 6.0	3.0 - 8.0	3.8 - 10.0	4.0 - 12.5	4.8 - 13.5	5.6 - 15.0
Angled > 30° m	2.1 - 4.5	2.7 - 5.0	3.3 - 7.0	3.7 - 8.0	4.0 - 9.0	4.8 - 11.0

MINIMUM CLEARANCES TO COMBUSTIBLE MATERIAL - MM

Model No.	SIDE	ABOVE	BELOW	END	FRONT	REAR
615NU / 615NL	450	450	1220	450	575	305
625NU / 625NL	510	450	1220	510	610	305
630 - 645 NU/NL	760	610	2285	610	760	380

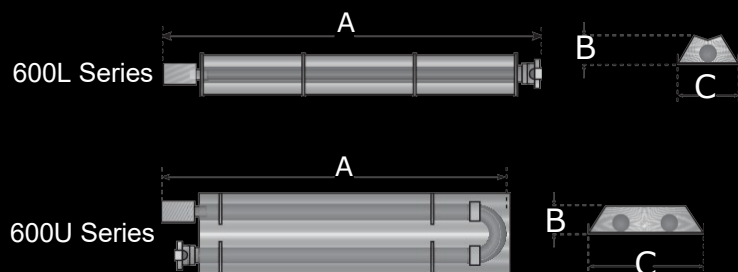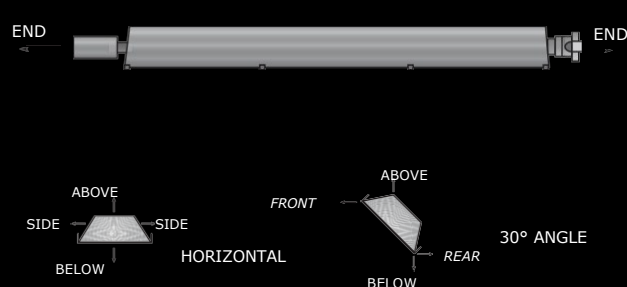

For more info contact:

Infraglo (Sheffield) Ltd
 Dannemora Drive
 Greenland Road Industrial Park
 Sheffield S9 5DF

0114 2495445
 info@infraglo.com



Get In Touch

Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH