



SSG-EX 800-1000 SOC SIL DVV-EX

Item no. 95505

Document type: **Product card**
 Document date: **2019-06-20**
 Generated by: **Systemair Online Catalogue**

Description

Socket silencer for DVV-EX fans


The socket silencers SSG-EX are suitable for mounting on flat roofs. Manufactured of AZ/ZM coated steel sheet. Supplied with 40 mm mineral wool insulation with coated fabric and metallic guard over insulation and baffles. The sealing between the fan and the socket is provided. With extra bolt M6 (560 size) respectively M8 for earthing. **Suitable for DVV-EX fans with marking XS, XM, XL.**



Technical parameters

| Other | |
|--------|--------|
| Weight | 116 kg |

Dimensions

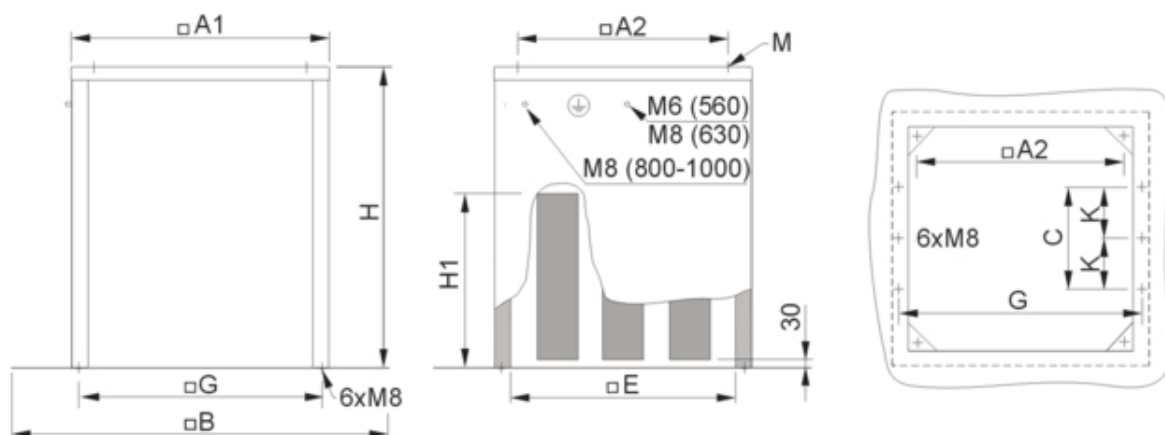

| | A1 | A2 | B | M | E | H | H1 | C | K | G |
|------------------------|------|------|------|----|------|------|-----|-----|-----|------|
| SSG-EX 800-1000 | 1210 | 1050 | 1540 | 12 | 1120 | 1010 | 600 | 640 | 320 | 1174 |

Accessories

Documentation

IMO_FDV_FDG_SSV_SSG_24_05_2016.pdf (1,45MB)

SSG_Ex_800_1000_00.dxf (616,96kB)


Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH

Diagram

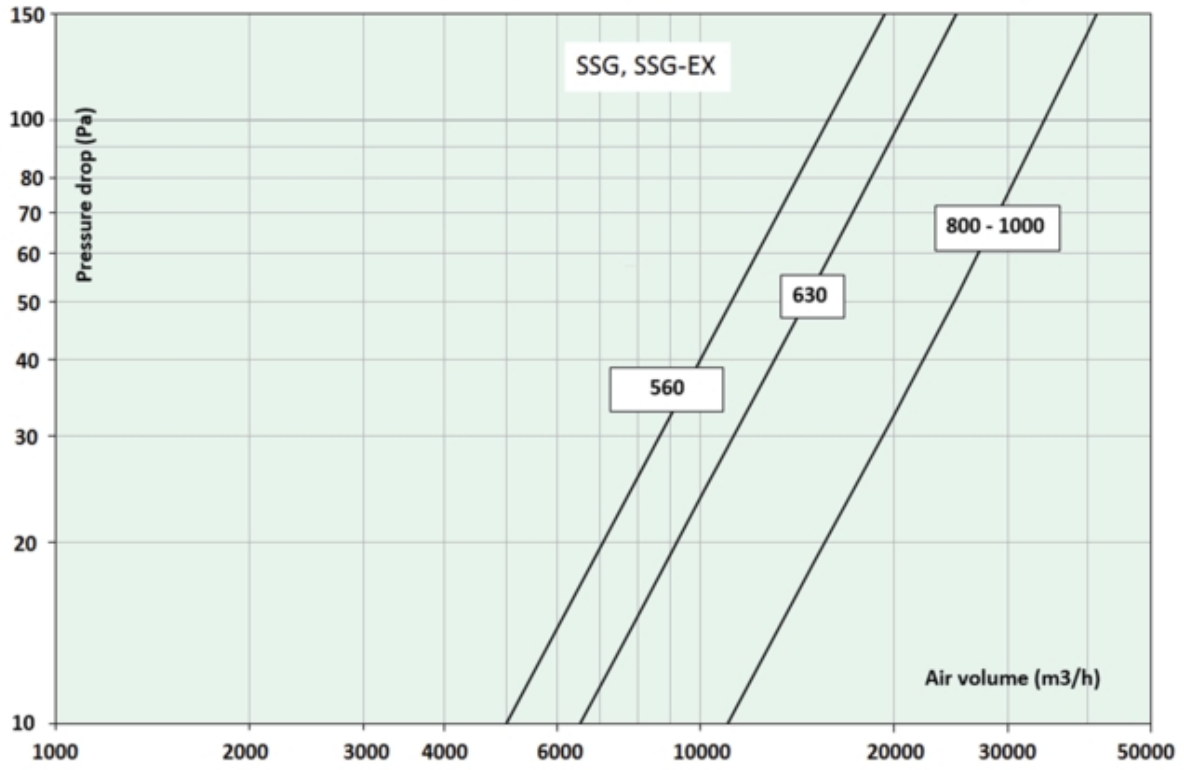

| | | | | | | | |
|--------------------|-----|-----|-----|------|----|----|----|
| Mid-frequency (Hz) | 125 | 250 | 500 | 1k | 2k | 4k | 8k |
| Attenuation (dB) | 3,5 | 6,7 | 9,5 | 15,5 | 15 | 13 | 9 |

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH