

MUB 062 630D4 Multibox


Centrifugal box fan, insulated, flexible outlet

Item Number: 235398

Variant: 400V 3~ 50Hz - 90° air flow

- High efficient motor
- Speed-controllable via frequency converter
- Integral cold conductor (PTC)
- Low sound level
- Flexible airflow direction due to removable panels
- Installation in any mounting position
- Easy to maintain and reliable

The MUB fan are equipped with high efficient motors. The MUB fans have an impeller with backward curved blades, manufactured from aluminum. Speed control is only possible by using a frequency converter. Motor protection is done by cold conductors (PTC), which have to be connected to an external motor protection device. The casing consists of an aluminum frame with fiberglass reinforced plastic corners of PA6; highly shock-resistant. The double skin panels are manufactured from galvanized steel with 30 mm mineral wool insulation. To avoid condensation the profile is provided with a separate chamber to fix screws. The Multibox fans are delivered for straight through airflow but can easily be rebuilt due to removable panels. This allows flexible ventilation solutions. The MUB can also be used as extract- or supply air unit in air handling units. Installation in any mounting position is possible.

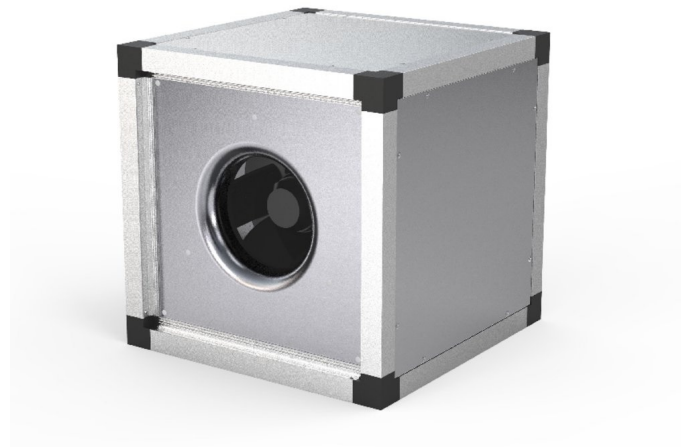


MUB with additional modules (filters, heaters etc.) are available as air handling units "K025, K042 or K062" on request!

Technical parameters

Nominal data		
Voltage (nominal)	400	V
Frequency	50	Hz
Phases	3~	
Input power	4,499	W
Input current	8	A
Impeller speed	1,464	rpm
Air flow	max 4.249	m³/s
Temperature of transported air	max 40	°C
Max temperature of transported air, when speed controlled	40	°C
Protection/Classification		
Enclosure class, motor	IP55	
Insulation class	F	

Get In Touch

 **Call:** 0845 6880112
 **Email:** info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH

Data according to ErP

ErP ready

ErP 2016; ErP 2018

Dimensions and weights

Weight

111.5 kg

Others

Motor type

AC

Article name: MUB 062 630D4 Multibox | Product link: <https://shop.systemair.com/en-GB/productPermalink?p=522806> | Item Number: 235398 | Variant: 400V 3~ 50Hz - 90° air flow | Document type: Product card | Created at: 03.11.2022 | Generated by: Systemair Online Catalogue | Language: English

Page 2 of 8

Get In Touch



Call: [0845 6880112](tel:08456880112)




Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

Performance

Performance curve

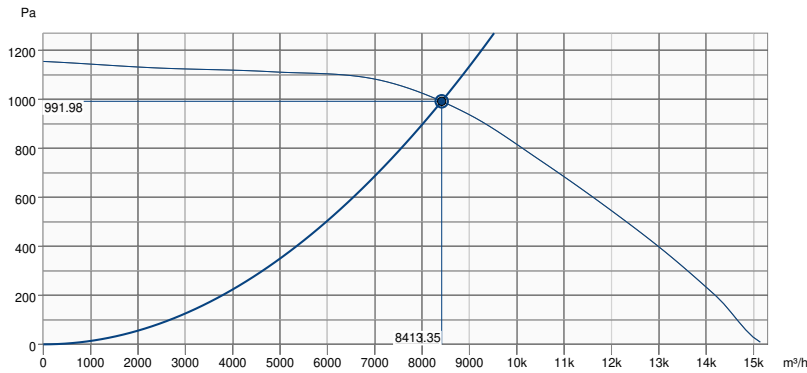

Hydraulic data

Required air flow	8413.42 m³/h
Required static pressure	992 Pa
Working air flow	8413.35 m³/h
Working static pressure	992 Pa
Air density	1.204 kg/m³
Power	4349.5 W
Fan control - RPM	1465 rpm
Current	7.80 A
SFP	1.861 kW/m³/s
Control voltage	400.0 V
Supply voltage	400 V

Sound power level		63	125	250	500	1k	2k	4k	8k	Total
Inlet	dB(A)	58	78	81	84	85	82	79	71	90
Outlet	dB(A)	59	79	82	85	87	83	80	72	91
Surrounding	dB(A)	38	62	53	52	55	54	46	36	64
Sound pressure level at 3m (20m² Sabine)	dB(A)	-	-	-	-	-	-	-	-	57
Sound pressure level at 3m free field	dB(A)	-	-	-	-	-	-	-	-	43

Article name: MUB 062 630D4 Multibox | Product link: <https://shop.systemair.com/en-GB/productPermalink?p=522806> | Item Number: 235398 | Variant: 400V 3~ 50Hz - 90° air flow | Document type: Product card | Created at: 03.11.2022 | Generated by: Systemair Online Catalogue | Language: English

Get In Touch

Call: 0845 6880112
 Email: info@adremit.co.uk


Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard, Settle, North Yorkshire, BD24 9RH



Dimension

MUB 062	□A	□B	□C	□D	E
560/630	820	820	720	678	21

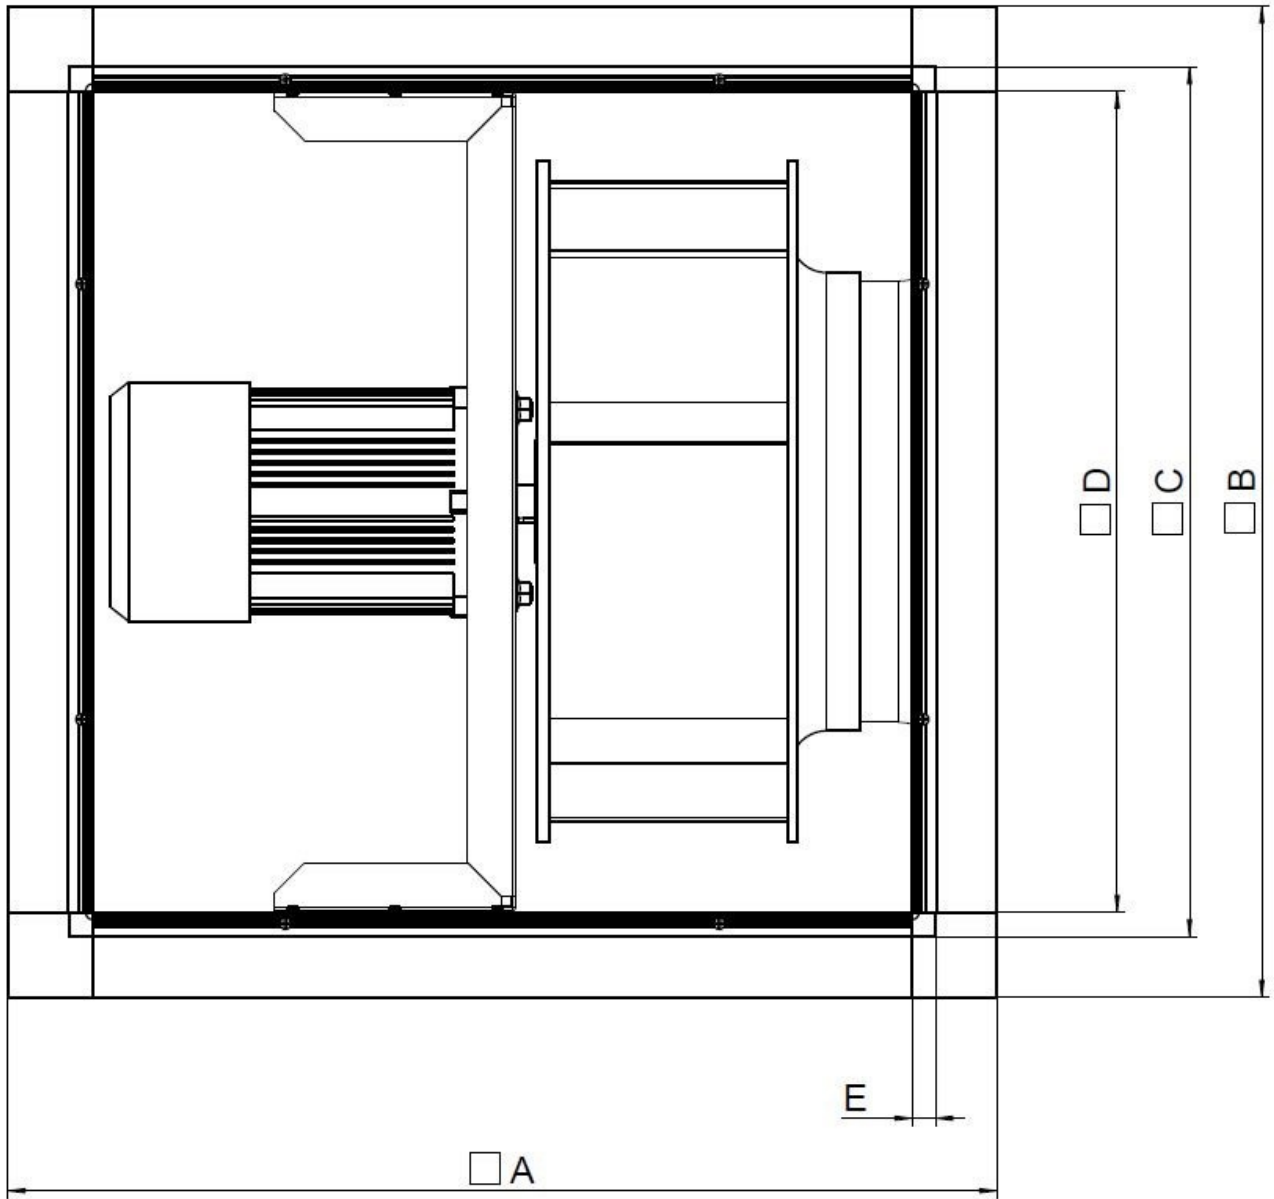

Get In Touch



Call: [0845 6880112](tel:08456880112)




Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

Dreiphasenmotor mit Kaltleiter
Three phase motor with cold conductor
Moteur triphasé avec résistance PTC

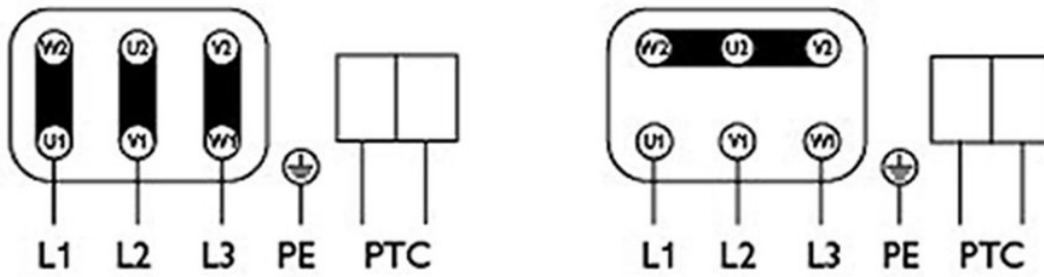

3 x 400V
D Schaltung
Delta connection
Branchement en triangle

3 x 690V
Y Schaltung
Star connection
Branchement en étoile

Drehrichtungsänderung durch Vertauschen von 2 Phasen
Changing of direction of rotation by interchanging of two phases
Changement de sens de rotation par inversion de deux phases

Typenschild beachten! See label! Voir plaquette!

Get In Touch

Call: 0845 6880112
Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH



Acoustic

The Level of Casing-Breakout-Noise depends on the quality of shielding the acoustic inlet and outlet noises.

The shown Level of Casing-Breakout-Noise will be reached only in case of 100 % shielding the acoustic inlet and outlet noise and a correspondingly low environment noise.

Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

Ecodesign

Product	
Trade name	Systemair
Product name	MUB 062 630D4 IE3
Ecodesign	
ErP compliance	2018
Unit category	NRVU
Drive	External MSD or VSD
Unit type	UVU
Heat recovery type	None
Temperature ratio (UVU)	Not applicable
qv nom	2.34 m ³ /s
P nom	4.351 kW
Ps nom	992 Pa
Fan efficiency	53.3 %
External Leakage	5 %
Sound power level LWA	91 dB(A)

Article name: MUB 062 630D4 Multibox | Product link: <https://shop.systemair.com/en-GB/productPermalink?p=522806> | Item Number: 235398 | Variant: 400V 3~ 50Hz - 90° air flow | Document type: Product card | Created at: 03.11.2022 | Generated by: Systemair Online Catalogue | Language: English

Page 7 of 8

Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH

Accessories

- FGV 062/716-716 flex. conn. (4198)
- Frequency converter FRQ5-10A (36230)
- Frequency converter FXDM14AM (31389)
- SD-MUB Vibration pad set (37324)
- U-EK230E Motor protection (30199)
- WSD 062 (860x860x70) complete (31482)
- Frequency converter FRQS-10A (36232)
- CCM inlet MUB062 d560 (311782)
- CCM outlet MUB062 d560 (311684)
- CCMI outlet 062 d560 KIT 30mm (239095)
- GRU 062 base frame h= 100mm (276662)
- KKC-DX-R 062 cooling section (277266)
- KKC-W-R 062 cooling section (277274)
- KKH-HW 062 heater-section (93340)
- Frequency converter FRQ-10A (36228)
- Frequency converter FRQ5S-10A (36234)
- REV-5POL/05-7,5kW R/Y (33979)
- TUNE-AHU-DE008-062-718x718-M0 (79882)
- UGS 062/630 adapter flex. (4358)
- WSG 062 MUB complete (31486)
- REV-5POL/07-EMV-7,5kW R/Y (34549)
- CCM inlet MUB062 d630 (311783)
- CCM outlet MUB062 d630 (311681)
- CCMI outlet 062 d630 KIT 30mm (239096)
- KKC-DX-L 062 cooling section (277262)
- KKC-W-L 062 cooling section (277270)
- KKF 30 062-filter-section (93312)
- KKS 062 silencer-section (276852)

Documents

- Installation, Operation and Maintenance instruction_001
- UKCA DECLARATION OF CONFORMITY_MUB_EN_002.PDF
- COMMISSIONING REPORT_FANS_160628_EN_001.PDF

Get In Touch

- 📞 Call: [0845 6880112](tel:08456880112)
- ✉ Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH