systemair

TOB 125-160 ROOF CURB BLACK

Item no. 1411

Description

Profiled covering plate

This covering plate is shaped like a roof tile so that it can be fitted on to a standard doublelap concrete roof tile (type TOB 125-160) or on to two single-lap roof tiles (TOB 200-315). It is fitted at right angles to the roof cladding and can therefore be used on different roof pitches.

The covering plate is manufactured from powder-coated galvanised sheet steel. They are available in the standard colours of black, brick red and also uncoated. The spiral duct connected to the cover is insulated with 30 mm mineral fibre. The roof fan TFSR is fastened to the profiling plate with 4 screws, these screws are included in TOB.


Earthed electrical connection and 3 m cable are included, as well as the TUB under-plate which is fitted on to the inside of the roof. This under-plate prevents water-damage via the roof aperture if there is leakage on the outside of the roof. The underplate should not be used if the roof is only covered with roofing felt.

Document type: Product card Document date: 2019-06-04 Generated by: Systemair Online Catalogue



Dimensions

тов	А	В	С	D	Е	F	øD
125-160	260	375	-	448	323	230	160

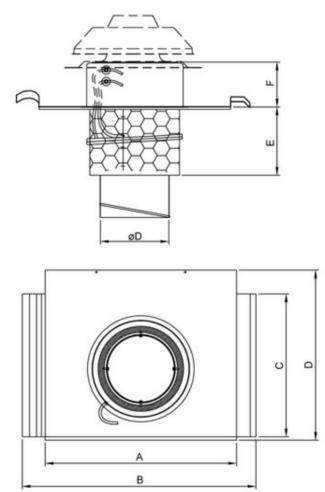

Name: TOB 125-160 ROOF CURB BLACK | Item no.: 1411 Document type: Product card | Document date: 2019-06-04 | Generated by: Online catalogue



Get In Touch

Call: <u>0845 6880112</u>

Email: info@adremit.co.uk

Our Address

uravent, Adremit Limited, Unit 5a, Commercial Yard, ettle, North Yorkshire, BD24 9RH

Documentation

TOB, TOS,THS, THB installation instruction 205815 CE _10-02_.pdf (1,09MB)

Specification text

Name: TOB 125-160 ROOF CURB BLACK | Item no.: 1411 Document type: Product card | Document date: 2019-06-04 | Generated by: Online catalogue



Get In Touch

℃ Call: <u>0845 6880112</u>
☑ Email: <u>info@adremit.co.uk</u>

Our Address